




# OIL ANALYSIS REPORT

Sample Rating Trend

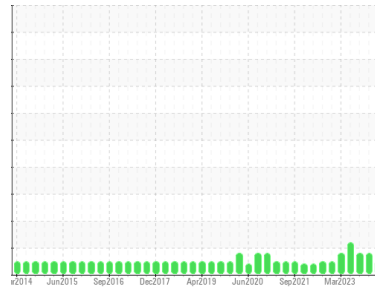

**NORMAL**



Area

**6 Calender Line**

Machine Id

**39-0690 Bastian**

Component

**Hydraulic System**

Fluid

**SUNOCO SUNVIS 846 ISO 46 (170 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0892247</b>	WC0837282	WC0837275
Sample Date	Client Info		<b>21 Mar 2024</b>	04 Jan 2024	03 Oct 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ATTENTION	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	<b>5</b>	<1	0
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	0
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>36</b>	29	30
Phosphorus	ppm	ASTM D5185(m)		<b>239</b>	257	261
Zinc	ppm	ASTM D5185(m)		<b>300</b>	274	282
Sulfur	ppm	ASTM D5185(m)		<b>5072</b>	5243	4960
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	4	0


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>855</b>	9169	11308
Particles >6µm	ASTM D7647	>1300	<b>275</b>	958	996
Particles >14µm	ASTM D7647	>160	<b>25</b>	32	18
Particles >21µm	ASTM D7647	>40	<b>5</b>	8	3
Particles >38µm	ASTM D7647	>10	<b>1</b>	1	0
Particles >71µm	ASTM D7647	>3	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>17/15/12</b>	20/17/12	21/17/11




# OIL ANALYSIS REPORT


Particle Trend

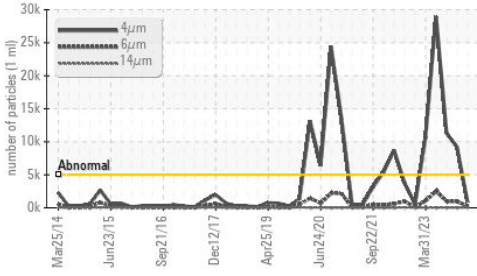


Acid Number

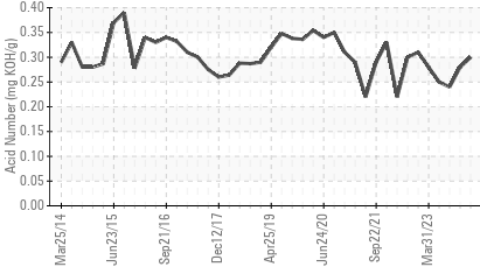

Viscosity @ 40°C

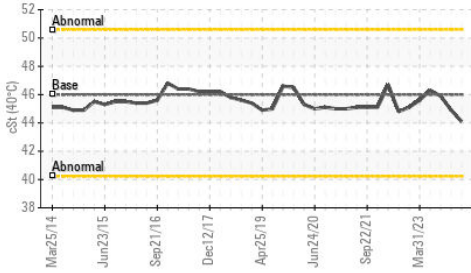

Particle Trend

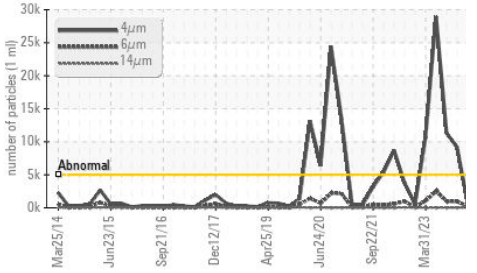

**FLUID DEGRADATION**    method    limit/base    current    history1    history2

Acid Number (AN)    mg KOH/g    ASTM D974\*    **0.30**    0.28    0.24


**VISUAL**    method    limit/base    current    history1    history2

White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	HAZY	HAZY
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

**FLUID PROPERTIES**    method    limit/base    current    history1    history2


Visc @ 40°C    cSt    ASTM D7279(m)    46.0    **44.1**    44.9    45.9

**SAMPLE IMAGES**    method    limit/base    current    history1    history2

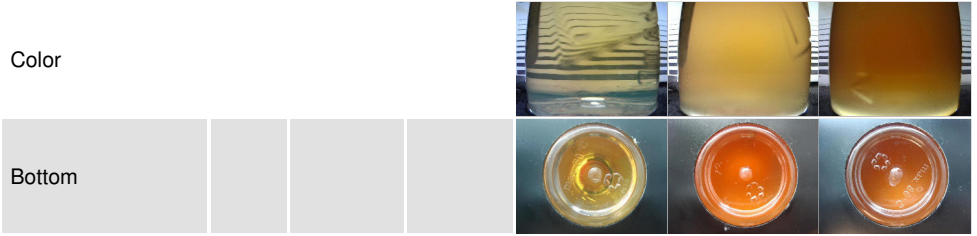


**GRAPHS**


Ferrous Alloys

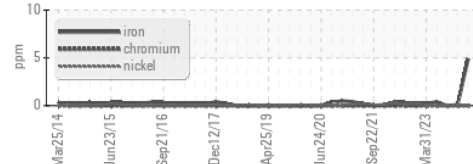


Non-ferrous Metals

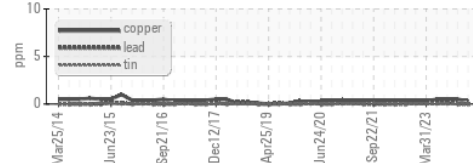


Viscosity @ 40°C

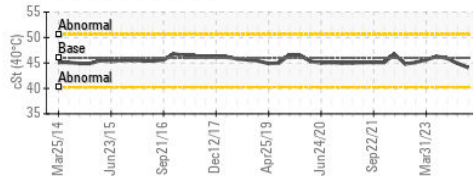

Particle Count

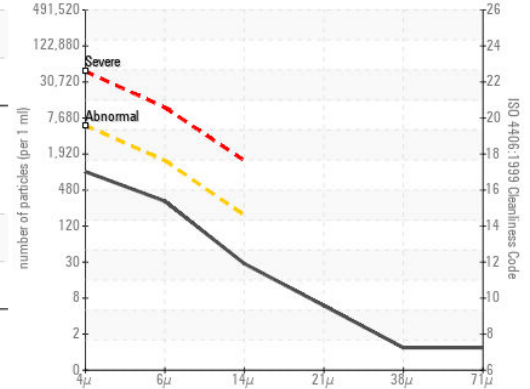

Acid Number

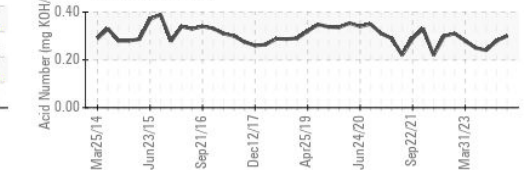

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0892247  
**Lab Number** : 02626639  
**Unique Number** : 5759771  
**Test Package** : IND 2

**CANADIAN GENERAL TOWER LTD.**  
 52 MIDDLETON STREET, P.O. BOX 160  
 CAMBRIDGE, ON  
 CA N1S 2R4  
 Contact: Bob Abell  
 bob.abell@cgtower.com  
 T: (519)623-1630  
 F: (519)623-7018

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.