




OIL ANALYSIS REPORT

Sample Rating Trend

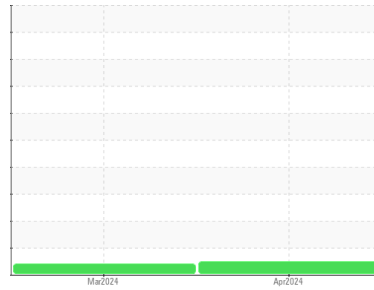

NORMAL



Area
Global Assy MLG/Rig 14
 Machine Id
DEC 4406
 Component
Hydraulic System
 Fluid
SKYDROL LD-4 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number | Client Info | | | WC0926847 | WC0920424 | --- |
| Sample Date | Client Info | | | 03 Apr 2024 | 12 Mar 2024 | --- |
| Machine Age | hrs | Client Info | | 0 | 0 | --- |
| Oil Age | hrs | Client Info | | 0 | 0 | --- |
| Oil Changed | Client Info | | | N/A | N/A | --- |
| Sample Status | | | | NORMAL | ABNORMAL | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | >20 | 0 | 0 | --- |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | 0 | --- |
| Nickel | ppm | ASTM D5185(m) | >20 | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | --- |
| Silver | ppm | ASTM D5185(m) | | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185(m) | >20 | 0 | <1 | --- |
| Lead | ppm | ASTM D5185(m) | >20 | 0 | 0 | --- |
| Copper | ppm | ASTM D5185(m) | >20 | <1 | <1 | --- |
| Tin | ppm | ASTM D5185(m) | >20 | 0 | 0 | --- |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | --- |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | --- |






| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | 0 | 2 | <1 | --- |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185(m) | 0 | 0 | 0 | --- |
| Manganese | ppm | ASTM D5185(m) | | 0 | 0 | --- |
| Magnesium | ppm | ASTM D5185(m) | 0 | 0 | <1 | --- |
| Calcium | ppm | ASTM D5185(m) | 0 | 1 | <1 | --- |
| Phosphorus | ppm | ASTM D5185(m) | 20000 | 41490 | 38840 | --- |
| Zinc | ppm | ASTM D5185(m) | 0 | 2 | 1 | --- |
| Sulfur | ppm | ASTM D5185(m) | 1900 | 1598 | 1751 | --- |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >15 | <1 | 2 | --- |
| Sodium | ppm | ASTM D5185(m) | | 3 | 2 | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | 21 | 22 | --- |
| Water | % | ASTM D6304* | >0.6 | 0.194 | 0.204 | --- |
| ppm Water | ppm | ASTM D6304* | >6000 | 1949 | 2045 | --- |

| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm | | ASTM D7647 | >5000 | 1868 | 2698 | --- |
| Particles >6µm | | ASTM D7647 | >1300 | 430 | 768 | --- |
| Particles >14µm | | ASTM D7647 | >160 | 51 | 105 | --- |
| Particles >21µm | | ASTM D7647 | >40 | 19 | 39 | --- |
| Particles >38µm | | ASTM D7647 | >10 | 3 | 9 | --- |
| Particles >71µm | | ASTM D7647 | >3 | 2 | 6 | --- |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | 18/16/13 | 19/17/14 | --- |



OIL ANALYSIS REPORT

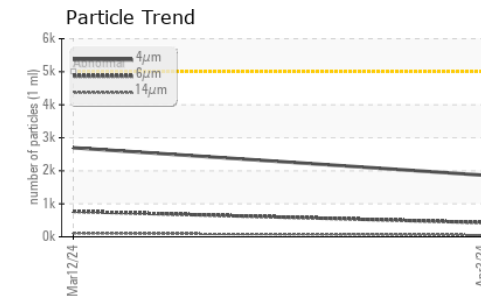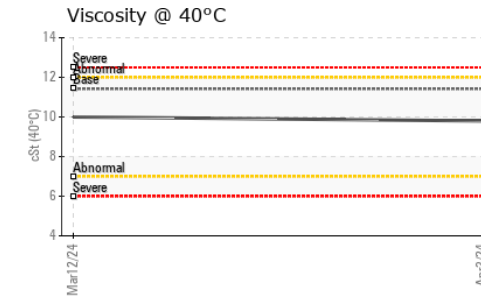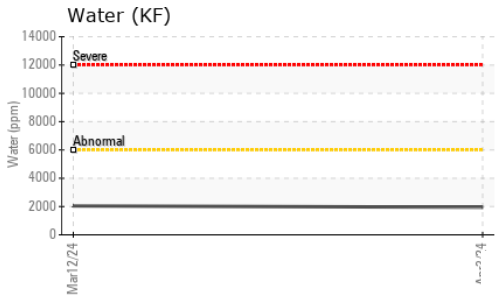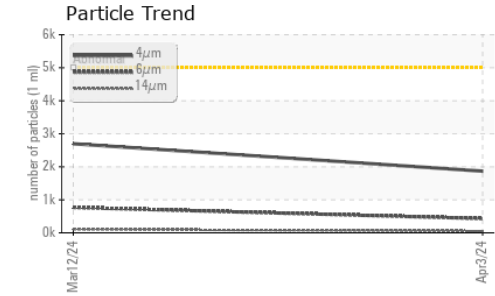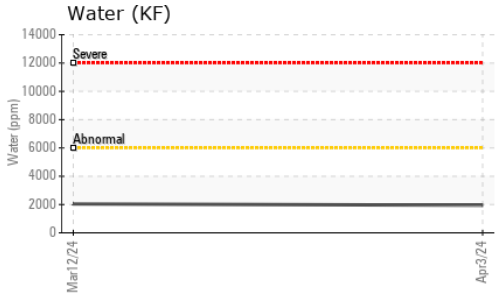


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | 0.10 | 0.01 | 0.01 | --- |


| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | --- |
| Precipitate | scalar | Visual* | NONE | NONE | NONE | --- |
| Silt | scalar | Visual* | NONE | NONE | NONE | --- |
| Debris | scalar | Visual* | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | --- |
| Appearance | scalar | Visual* | NORML | NORML | NORML | --- |
| Odor | scalar | Visual* | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | Visual* | >0.6 | NEG | NEG | --- |
| Free Water | scalar | Visual* | | NEG | NEG | --- |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 11.42 | 9.8 | 10.0 | --- |

SAMPLE IMAGES

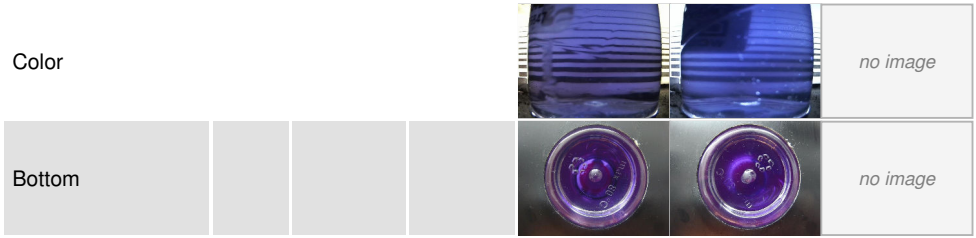

GRAPHS

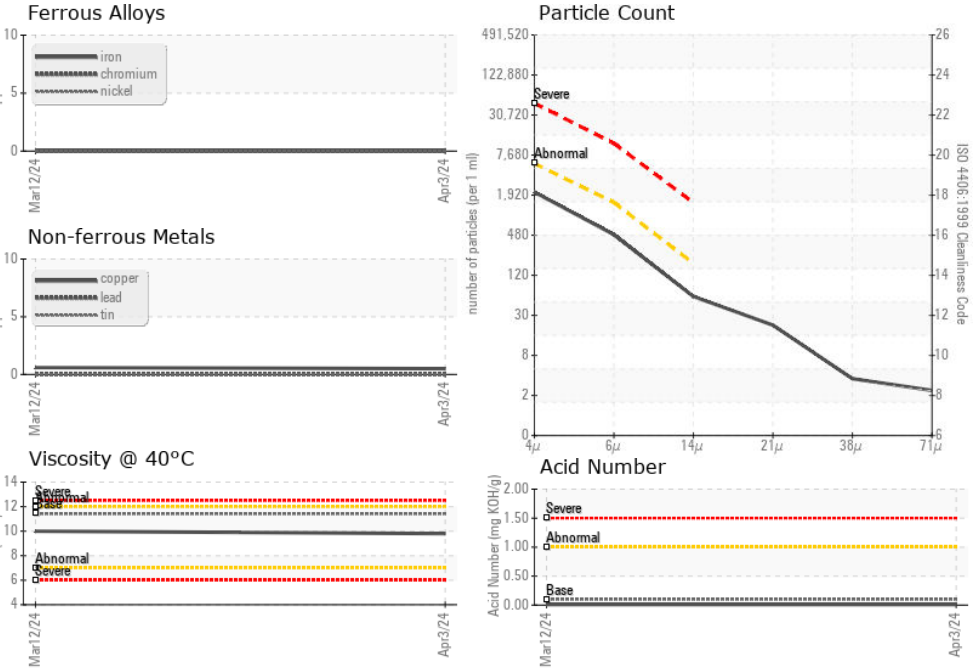

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0926847 **Received** : 04 Apr 2024
Lab Number : **02626821** **Tested** : 05 Apr 2024
Unique Number : 5759953 **Diagnosed** : 05 Apr 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: KF, TAN Man)

Safran Landing Systems
 574 Monarch Ave
 Ajax, ON
 CA L1S 2G8
 Contact: Stuart Potter
 stuart.potter@safrangroup.com
 T:
 F: (905)683-6983

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.