




OIL ANALYSIS REPORT

Sample Rating Trend

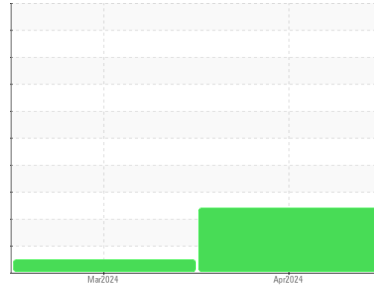

VISUAL METAL



Area

Assy 787 NLG/Rig 13

Machine ID
DEC 6555

Component
Hydraulic System

Fluid
ESSO HYJET V (--- GAL)

DIAGNOSIS

● Recommendation

We advise that you check for visible metal particles in the oil. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

▲ Wear

Light concentration of visible metal present.

● Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Particle Filter (Magn: 100 x)



SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0926862	WC0920411	---
Sample Date	Client Info			03 Apr 2024	12 Mar 2024	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				ATTENTION	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0	0	---
Chromium	ppm	ASTM D5185(m)	>20	0	0	---
Nickel	ppm	ASTM D5185(m)	>20	<1	0	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	0	<1	---
Lead	ppm	ASTM D5185(m)	>20	0	0	---
Copper	ppm	ASTM D5185(m)	>20	0	0	---
Tin	ppm	ASTM D5185(m)	>20	0	0	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		2	<1	---
Barium	ppm	ASTM D5185(m)		0	0	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)		<1	<1	---
Calcium	ppm	ASTM D5185(m)	4	5	5	---
Phosphorus	ppm	ASTM D5185(m)		41287	39397	---
Zinc	ppm	ASTM D5185(m)		1	1	---
Sulfur	ppm	ASTM D5185(m)	50	70	64	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0	<1	---
Sodium	ppm	ASTM D5185(m)		10	4	---
Potassium	ppm	ASTM D5185(m)	>20	31	33	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	● 9254	1264	---
Particles >6µm		ASTM D7647	>1300	● 2032	203	---
Particles >14µm		ASTM D7647	>160	144	12	---
Particles >21µm		ASTM D7647	>40	56	3	---
Particles >38µm		ASTM D7647	>10	7	1	---
Particles >71µm		ASTM D7647	>3	1	1	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	● 20/18/14	17/15/11	---



OIL ANALYSIS REPORT

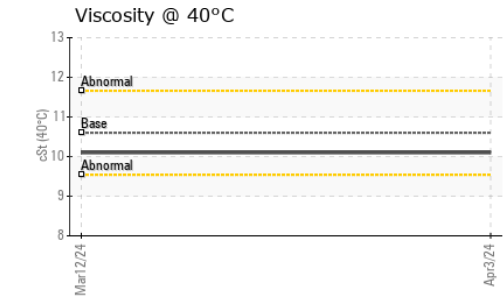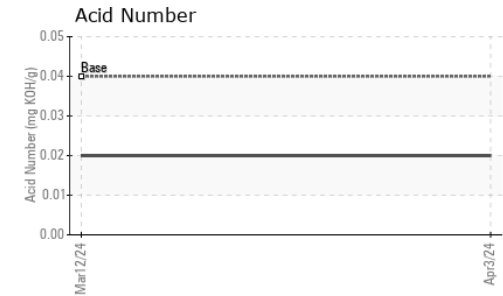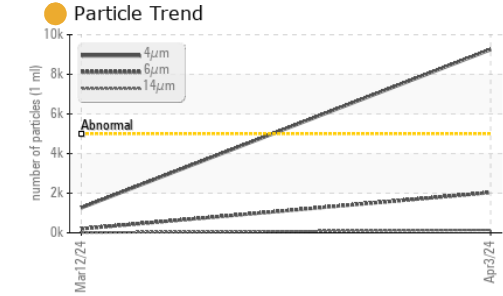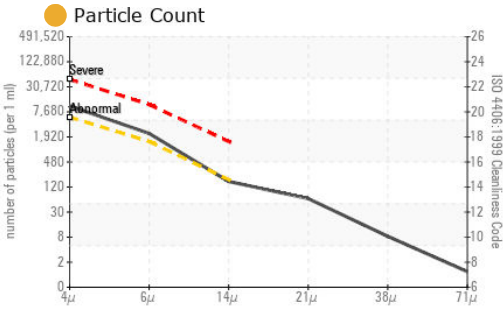

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.04	0.02	0.02	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	▲ VLITE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	10.6	10.1	10.1	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						no image
Bottom						no image
PrtFilter					no image	no image



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0926862 **Received** : 04 Apr 2024
Lab Number : **02626823** **Tested** : 05 Apr 2024
Unique Number : 5759955 **Diagnosed** : 05 Apr 2024 - Kevin Marson
Test Package : IND 2 (Additional Tests: Bottom, BottomAnalysis, FilterPatch, PrtFilter, TAN Mar

Safran Landing Systems
 574 Monarch Ave
 Ajax, ON
 CA L1S 2G8
 Contact: Stuart Potter
 stuart.potter@safrangroup.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (905)683-6983