




OIL ANALYSIS REPORT

Sample Rating Trend

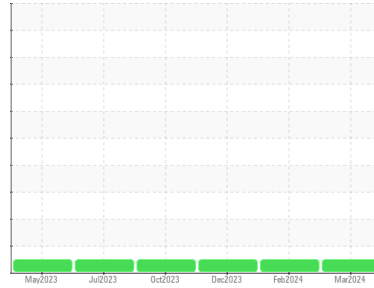

NORMAL



Machine Id
KUBOTA RTV X1140 MCP752 (S/N 100015583)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0910867	WC0861358	WC0865560
Sample Date	Client Info			31 Mar 2024	04 Feb 2024	03 Dec 2023
Machine Age	hrs	Client Info		1820	1615	1377
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	25	31	26
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	3	4	3
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	1	1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	44	42	48
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	41	42	42
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	533	526	524
Calcium	ppm	ASTM D5185(m)	1070	1790	1811	1683
Phosphorus	ppm	ASTM D5185(m)	1150	746	750	722
Zinc	ppm	ASTM D5185(m)	1270	895	901	893
Sulfur	ppm	ASTM D5185(m)	2060	2040	2144	2031
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	7	8	8
Sodium	ppm	ASTM D5185(m)		3	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.3	0.4	0.2
Nitration	Abs/cm	ASTM D7624*	>20	9.0	9.5	7.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.7	24.2	22.3



OIL ANALYSIS REPORT

FT-IR (Direct Trend)

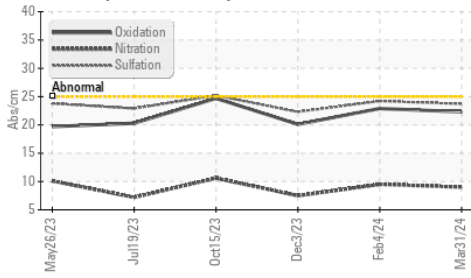

FLUID DEGRADATION method limit/base current history1 history2

Oxidation	Abs./1mm	ASTM D7414*	>25	22.3	22.9	20.1
-----------	----------	-------------	-----	-------------	------	------

VISUAL method limit/base current history1 history2

Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
------------------	--------	---------	------	------------	-----	-----


Free Water	scalar	Visual*		NEG	NEG	NEG
------------	--------	---------	--	------------	-----	-----

FLUID PROPERTIES method limit/base current history1 history2


Visc @ 100°C	cSt	ASTM D7279(m)	15.6	14.2	14.3	13.9
--------------	-----	---------------	------	-------------	------	------

GRAPHS


Additives

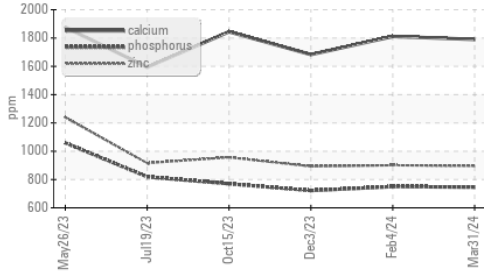


Iron (ppm)

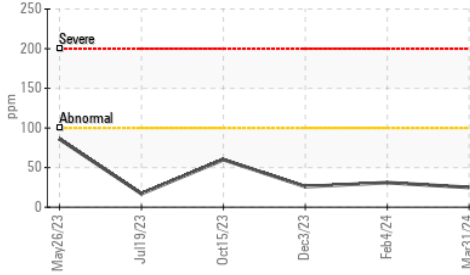


Lead (ppm)

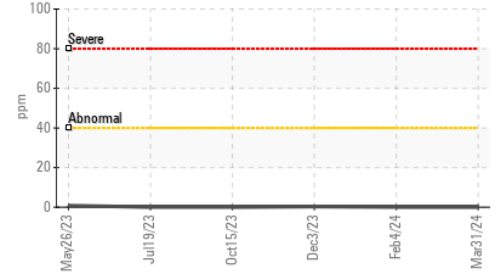


Additives

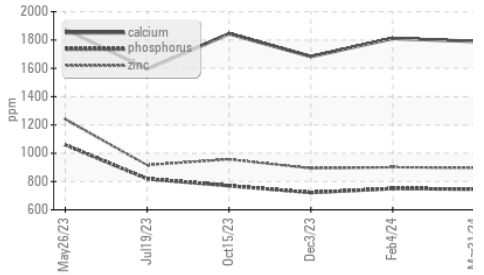


Aluminum (ppm)

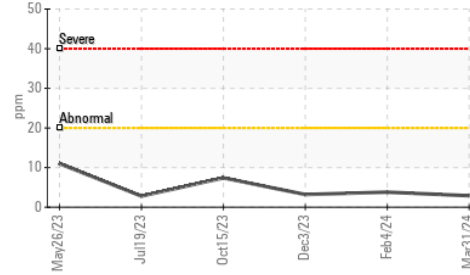


Chromium (ppm)

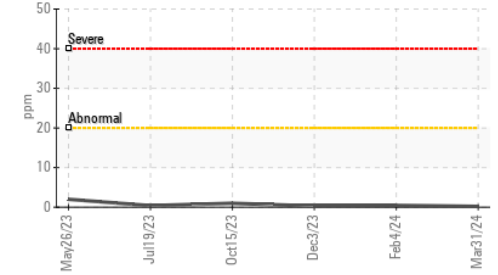


Copper (ppm)

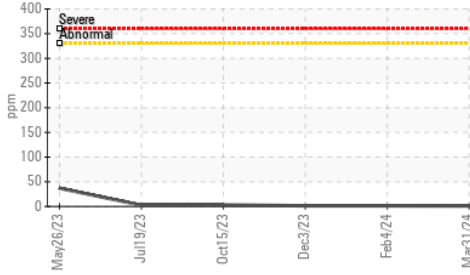


Silicon (ppm)

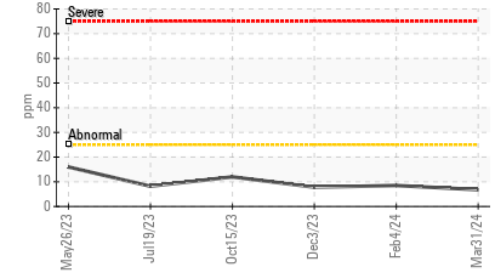

Viscosity @ 100°C

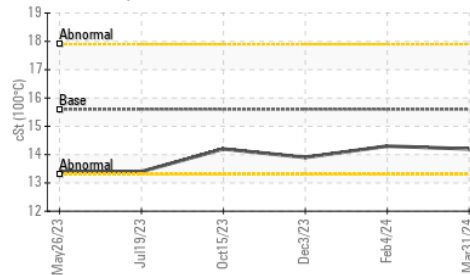

Soot %

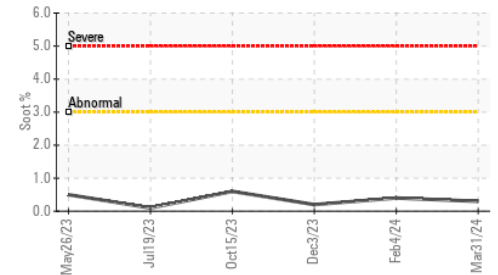

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0910867
Lab Number : 02626945
Unique Number : 5760077
Test Package : MOB 1

Received : 05 Apr 2024
Tested : 05 Apr 2024
Diagnosed : 08 Apr 2024 - Kevin Marson

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Phil St-Denis
 Phil.St-Denis@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.