




PROBLEM SUMMARY

Sample Rating Trend

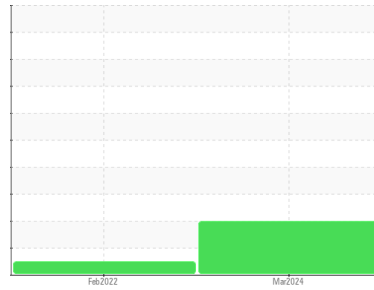

ISO




Machine Id
PH632.010.17

Component
Port Hydraulic System


Fluid
PETRO CANADA ENDURATEX EP 150 (4500 LTR)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

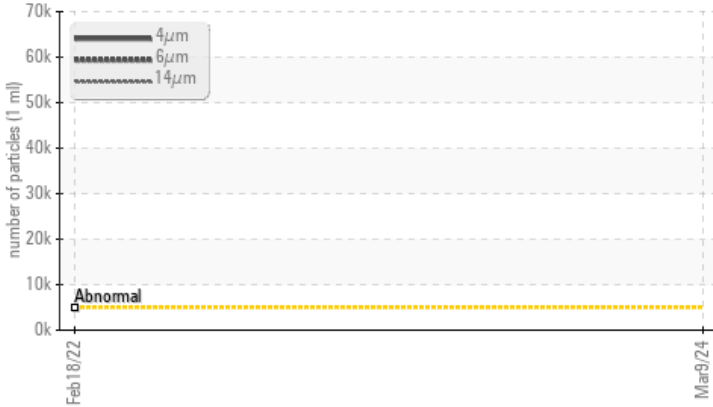

Non-ferrous Metals

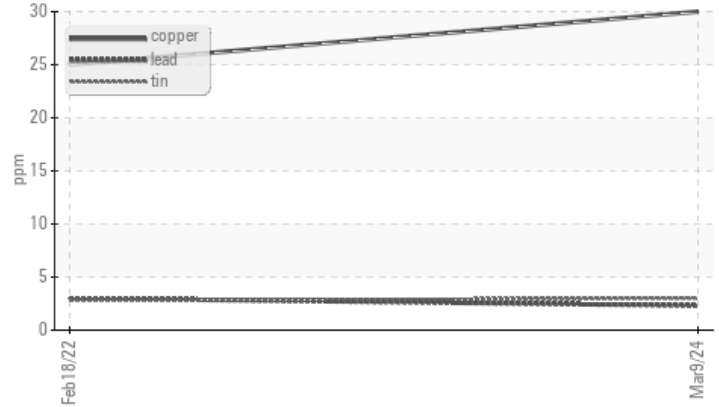

RECOMMENDATION

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	NORMAL	---
Particles >4µm	ASTM D7647	>5000	▲ 60012	---	---
Particles >6µm	ASTM D7647	>1300	▲ 4915	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 23/19/14	---	---

Customer Id: PLACHOPE
Sample No.: WC0873831
Lab Number: 02626979
Test Package: MAR 3



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Contact Required	---	---	?	Please contact your representative for information regarding the proper sampling kits for your service.
Alert	---	---	?	NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.

HISTORICAL DIAGNOSIS

NORMAL



18 Feb 2022 Diag: Kevin Marson

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. Component wear rates appear to be normal (unconfirmed). There is no indication of any contamination in the component (unconfirmed). The condition of the oil is acceptable for the time in service (unconfirmed).


view report





OIL ANALYSIS REPORT

Sample Rating Trend

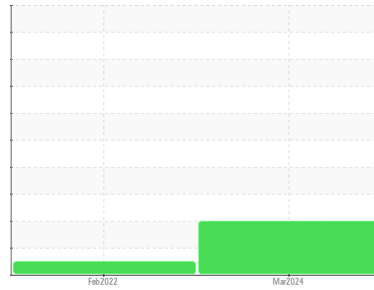

ISO



Machine Id
PH632.010.17

Component
Port Hydraulic System

Fluid
PETRO CANADA ENDURATEX EP 150 (4500 LTR)

DIAGNOSIS

▲ Recommendation

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

Wear

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

▲ Contaminants

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed). The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0873831	WC0557343	---
Sample Date	Client Info		09 Mar 2024	18 Feb 2022	---
Machine Age	hrs	Client Info	39119	36000	---
Oil Age	hrs	Client Info	8901	0	---
Oil Changed	Client Info		N/A	Not Changd	---
Sample Status			SEVERE	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m) >20	5	3	---
Chromium	ppm	ASTM D5185(m) >10	0	0	---
Nickel	ppm	ASTM D5185(m) >10	0	<1	---
Titanium	ppm	ASTM D5185(m)	0	0	---
Silver	ppm	ASTM D5185(m)	0	0	---
Aluminum	ppm	ASTM D5185(m) >10	<1	<1	---
Lead	ppm	ASTM D5185(m) >20	2	3	---
Copper	ppm	ASTM D5185(m) >20	30	25	---
Tin	ppm	ASTM D5185(m) >10	3	3	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES





	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 55	35	46	---
Barium	ppm	ASTM D5185(m) 0	0	0	---
Molybdenum	ppm	ASTM D5185(m) 0	0	0	---
Manganese	ppm	ASTM D5185(m) 0	0	0	---
Magnesium	ppm	ASTM D5185(m) 2	2	2	---
Calcium	ppm	ASTM D5185(m) 6	10	12	---
Phosphorus	ppm	ASTM D5185(m) 250	224	227	---
Zinc	ppm	ASTM D5185(m) 3	7	6	---
Sulfur	ppm	ASTM D5185(m) 7500	6542	6474	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	2	2	---
Sodium	ppm	ASTM D5185(m)	13	11	---
Potassium	ppm	ASTM D5185(m) >20	<1	0	---



OIL ANALYSIS REPORT

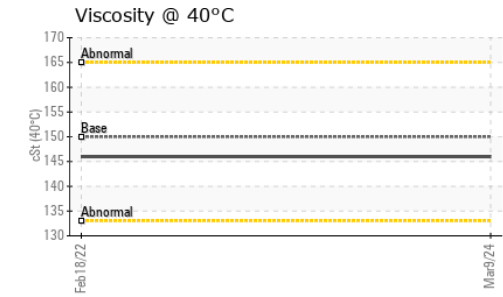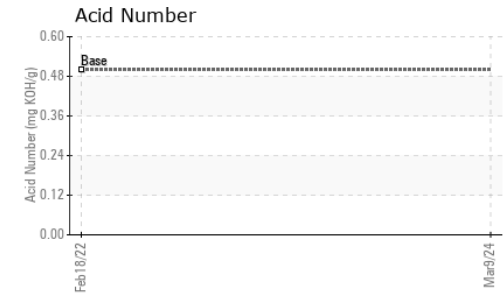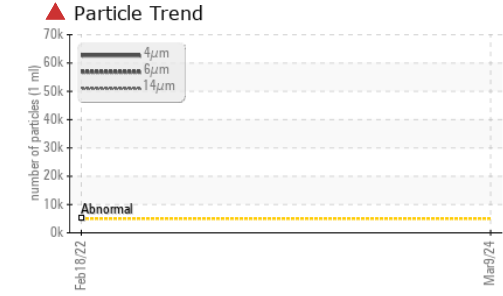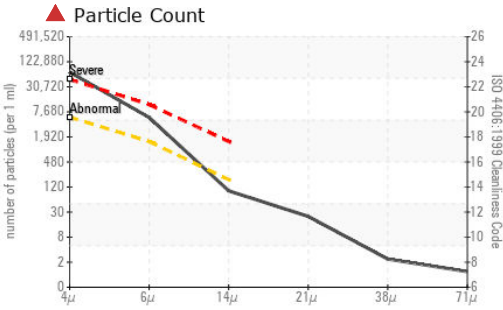


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 60012	---	---
Particles >6µm	ASTM D7647	>1300	▲ 4915	---	---
Particles >14µm	ASTM D7647	>160	86	---	---
Particles >21µm	ASTM D7647	>40	21	---	---
Particles >38µm	ASTM D7647	>10	2	---	---
Particles >71µm	ASTM D7647	>3	1	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 23/19/14	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.5	0.39	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	150.0	146	146	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

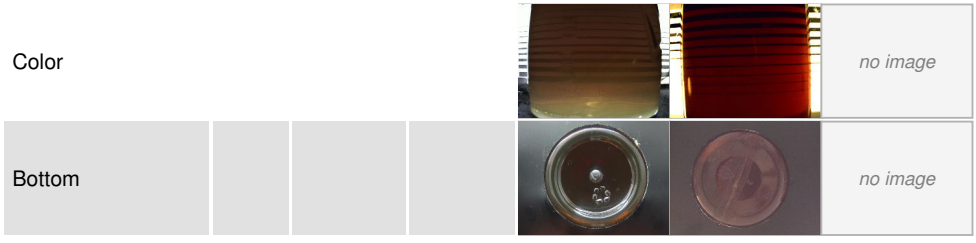




Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0873831
Lab Number : 02626979
Unique Number : 5760111
Test Package : MAR 3
Received : 05 Apr 2024
Tested : 09 Apr 2024
Diagnosed : 09 Apr 2024 - Kevin Marson

CANSHIP UGLAND LTD.
 PLACENTIA HOPE, P.O. BOX 8274, STN. A
 ST. JOHN'S, NL
 CA A1B 3N4
 Contact: Brian Bishop
 bbishop@canship.com
 T: (709)782-7341
 F: (709)782-0225

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FERROGRAPHY REPORT

Machine Id
PH632.010.17
 Component
Port Hydraulic System
 Fluid
PETRO CANADA ENDURATEX EP 150 (4500 LTR)

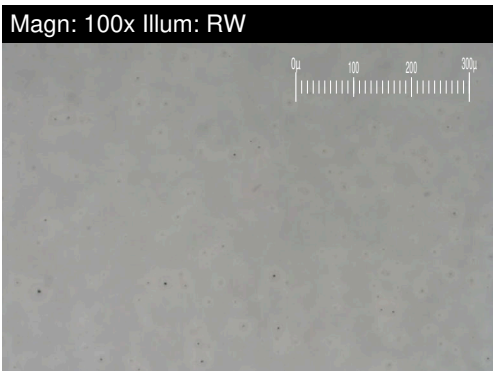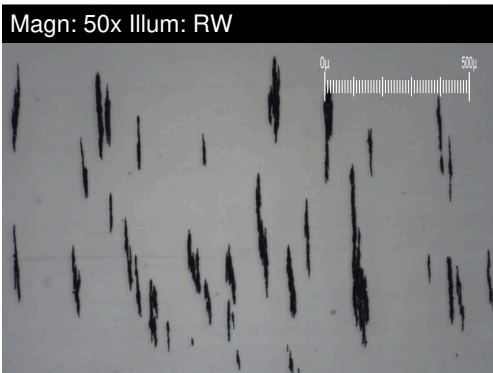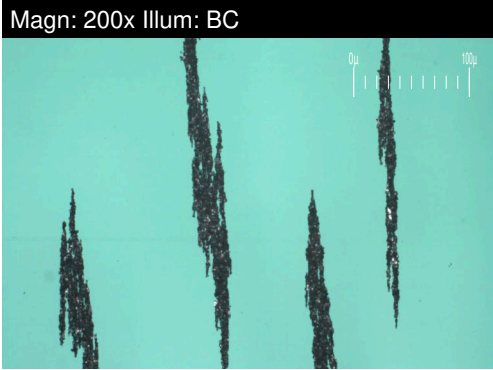


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		35.1	---	---
Small Particles		DR-Ferr*		13.8	---	---
Total Particles		DR-Ferr*	>---	48.9	---	---
Large Particles Percentage	%	DR-Ferr*		43.6	---	---
Severity Index		DR-Ferr*		748	---	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<div style="width: 40%; background-color: #008000;"></div> 4		
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		<div style="width: 10%; background-color: #008000;"></div> 1		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*				
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		<div style="width: 10%; background-color: #008000;"></div> 1		

WEAR

All component wear rates are normal.
 The ferrography results are normal indicating no abnormal wear in the system.

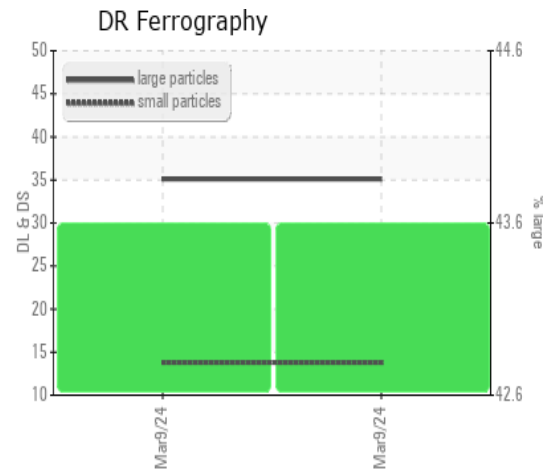

This page left intentionally blank