




OIL ANALYSIS REPORT

Machine Id
CATERPILLAR EXCAVATOR 01 (S/N SPN01708)
 Component
Hydraulic System
 Fluid
SHELL ROTELLA T 10W30 (30 GAL)

Sample Rating Trend

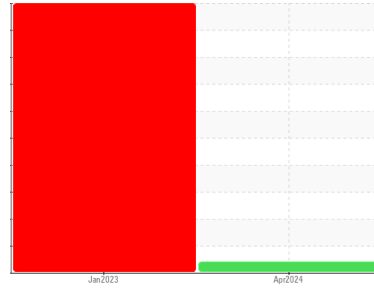

VISCOSITY



DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

Viscosity of sample indicates oil is within SAE 10W range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0726348	WC0726349	---
Sample Date	Client Info		03 Apr 2024	05 Jan 2023	---
Machine Age	hrs	Client Info	0	8300	---
Oil Age	hrs	Client Info	0	4000	---
Oil Changed	Client Info		Filtered	Not Changd	---
Sample Status			ABNORMAL	SEVERE	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	8	15	---
Chromium	ppm	ASTM D5185(m)	>20	0	<1	---
Nickel	ppm	ASTM D5185(m)	>20	0	<1	---
Titanium	ppm	ASTM D5185(m)		<1	1	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	1	1	---
Lead	ppm	ASTM D5185(m)	>20	0	<1	---
Copper	ppm	ASTM D5185(m)	>20	4	8	---
Tin	ppm	ASTM D5185(m)	>20	0	<1	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		10	21	---
Barium	ppm	ASTM D5185(m)		<1	0	---
Molybdenum	ppm	ASTM D5185(m)		2	7	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)		74	150	---
Calcium	ppm	ASTM D5185(m)		1537	483	---
Phosphorus	ppm	ASTM D5185(m)		747	625	---
Zinc	ppm	ASTM D5185(m)		705	449	---
Sulfur	ppm	ASTM D5185(m)		1811	1509	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS






	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	1	4	---
Sodium	ppm	ASTM D5185(m)		2	3	---
Potassium	ppm	ASTM D5185(m)	>20	2	2	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	3576	▲ 105083	---
Particles >6µm	ASTM D7647	>1300	784	▲ 35904	---
Particles >14µm	ASTM D7647	>160	41	▲ 2166	---
Particles >21µm	ASTM D7647	>40	9	▲ 476	---
Particles >38µm	ASTM D7647	>10	1	7	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	19/17/13	▲ 24/22/18	---



OIL ANALYSIS REPORT

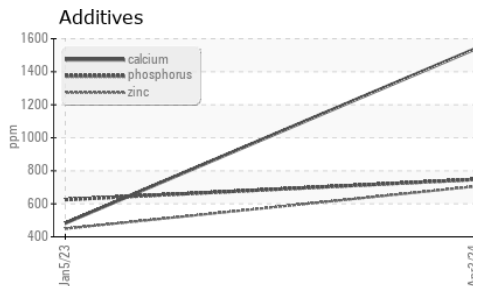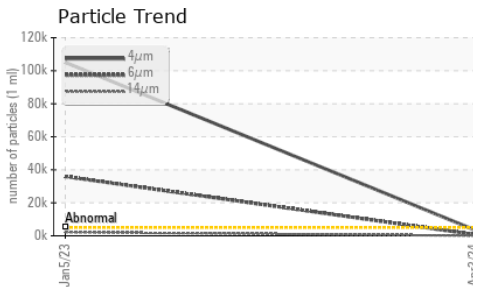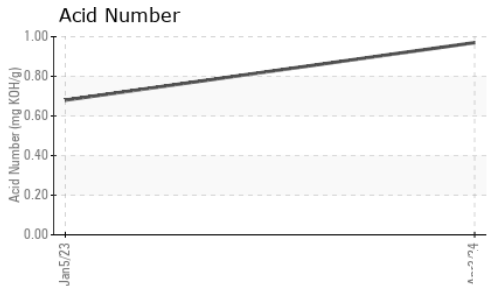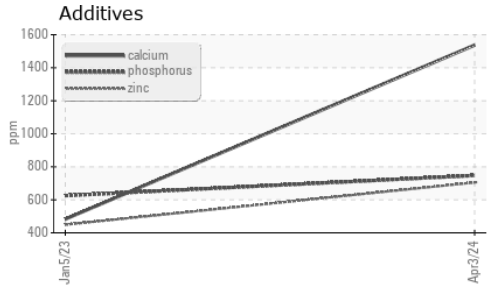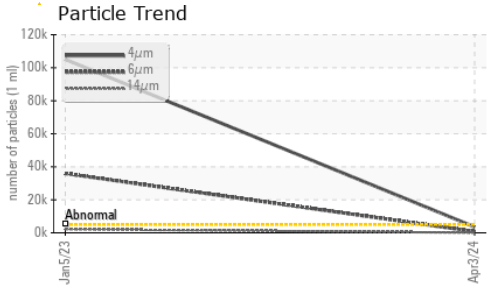


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.97	0.68	---



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---
Free Water	scalar	Visual*	NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	▲ 37.6	▲ 32.3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

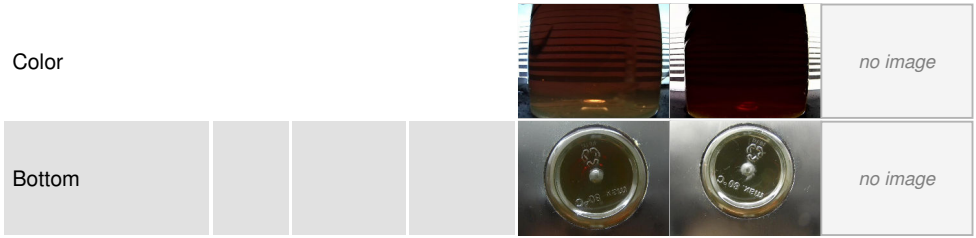

GRAPHS

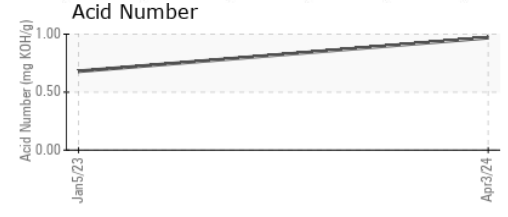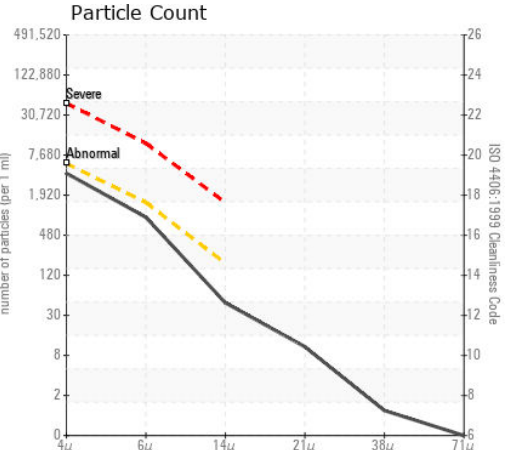

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0726348
Lab Number : 02626982
Unique Number : 5760114
Test Package : IND 2
Received : 05 Apr 2024
Tested : 08 Apr 2024
Diagnosed : 08 Apr 2024 - Kevin Marson

QUINTE HYDRAULIC SERVICES INC.
 52 PARKS DRIVE
 BELLEVILLE, ON
 CA K8N 0N5
 Contact: Ryan Griffin
 Ryan@qhsi.ca
 T: (613)969-6588
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.