




# OIL ANALYSIS REPORT

Sample Rating Trend

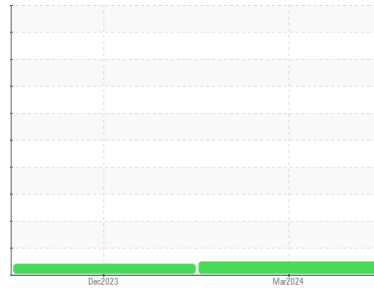

**NORMAL**



Machine Id  
**JUM013**  
 Component  
**Hydraulic System**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

### Wear

All component wear rates are normal.

### Contamination

The water content is negligible. There is no indication of any contamination in the component(unconfirmed).

### Fluid Condition

Viscosity of sample indicates oil is within ISO 68 range, advise investigate. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0920148</b>	WC0770046	---
Sample Date	Client Info		<b>29 Mar 2024</b>	14 Dec 2023	---
Machine Age	hrs	Client Info	<b>2294</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	N/A	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	1	---
Chromium	ppm	ASTM D5185(m) >10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m) >10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185(m) >10	<b>0</b>	<1	---
Lead	ppm	ASTM D5185(m) >10	<b>0</b>	<1	---
Copper	ppm	ASTM D5185(m) >75	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	---

## ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>0</b>	<1	---
Barium	ppm	ASTM D5185(m)	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	---
Magnesium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	---
Calcium	ppm	ASTM D5185(m)	<b>45</b>	51	---
Phosphorus	ppm	ASTM D5185(m)	<b>330</b>	340	---
Zinc	ppm	ASTM D5185(m)	<b>419</b>	436	---
Sulfur	ppm	ASTM D5185(m)	<b>6662</b>	6150	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>0</b>	<1	---
Sodium	ppm	ASTM D5185(m)	<b>0</b>	<1	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	---
Water	%	ASTM D6304* >0.1	<b>0.009</b>	---	---
ppm Water	ppm	ASTM D6304* >1000	<b>94</b>	---	---




# OIL ANALYSIS REPORT

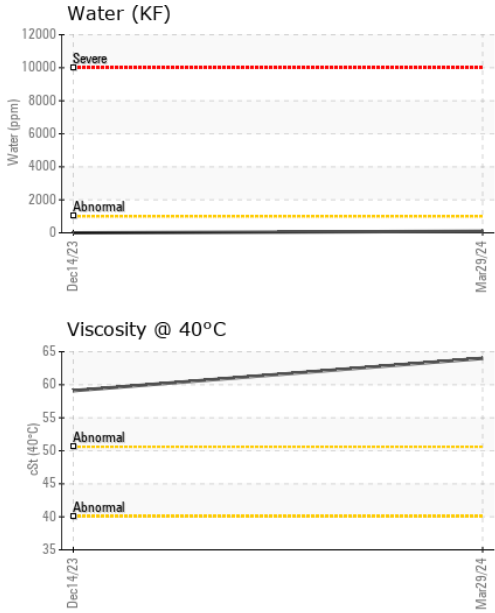



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	.2%	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	64.0	▲ 59.1	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

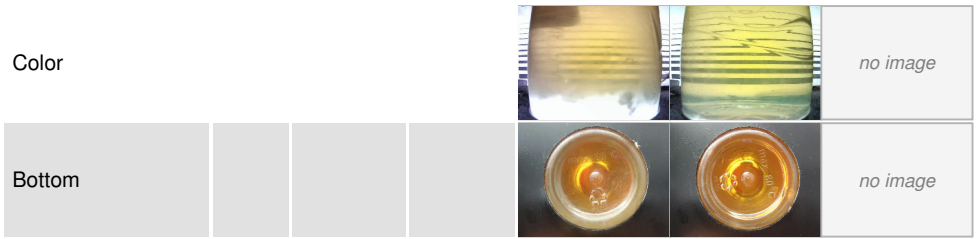

## GRAPHS

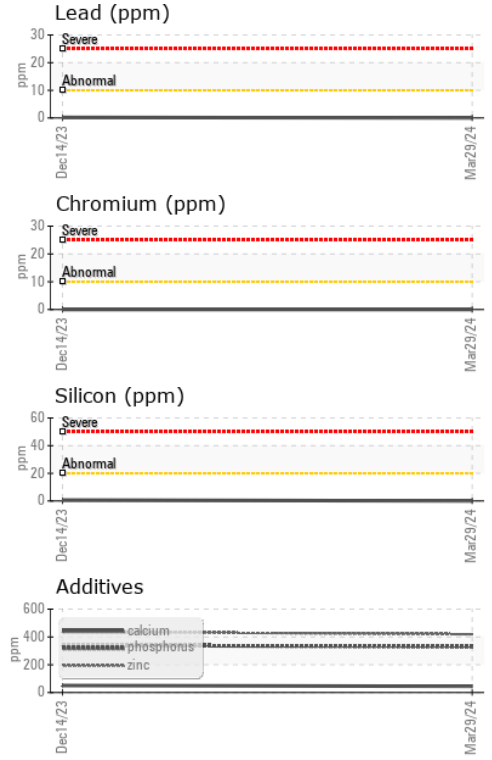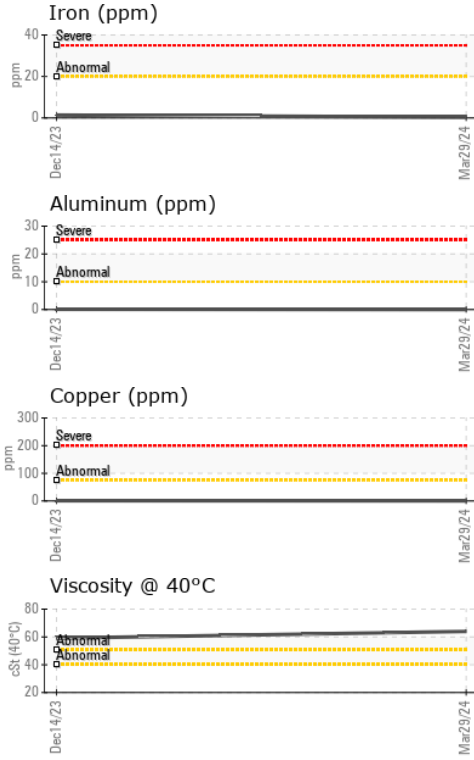

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0920148  
**Lab Number** : 02627024  
**Unique Number** : 5760156  
**Test Package** : MOB 1 ( Additional Tests: KF )

**Agnico Eagle Canada**  
 1350 Government Rd. W, MACASSA COMPLEX  
 Kirkland Lake, ON  
 CA P2N 3J1  
 Contact: Mitch Lamontagne  
 AEM\_KL\_macassaoilsampleresults@agnicoeagle.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T: (705)567-5208  
 F: (705)567-5221