


OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id
JUM013
Component

Rear Differential

Fluid

GEAR OIL SAE 75W140 (--- GAL)

D 1		\sim	. 10	\neg	71/	$\overline{}$
DI	А	(51	МÜ	D).	3 I	3
-1	, ,					

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The condition of the oil is acceptable for the time in service.

			Dec2023	Mar2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0920153	WC0883805	
Sample Date		Client Info		26 Mar 2024	14 Dec 2023	
Machine Age	hrs	Client Info		2297	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Changed	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>.2	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>500	112	105	
Chromium	ppm	ASTM D5185(m)	>10	<1	<1	
Nickel	ppm	ASTM D5185(m)	>10	0	<1	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		0	<1	
Aluminum	ppm	ASTM D5185(m)	>25	1	2	
Lead	ppm	ASTM D5185(m)	>25	0	<1	
Copper	ppm	ASTM D5185(m)	>100	<1	<1	
Tin	ppm	ASTM D5185(m)	>10	0	0	
Antimony	ppm	ASTM D5185(m)	>5	0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	400	19	19	
Barium	ppm	ASTM D5185(m)	200	<1	<1	
Molybdenum	ppm	ASTM D5185(m)	12	0	0	
Manganese	ppm	ASTM D5185(m)		<1	1	
Magnesium	ppm	ASTM D5185(m)	12	3	3	
Calcium	ppm	ASTM D5185(m)	150	16	16	
Phosphorus	ppm	ASTM D5185(m)	1650	2407	2427	
Zinc	ppm	ASTM D5185(m)	125	15	15	
Sulfur	ppm	ASTM D5185(m)	22500	33968	33507	
Lithium	ppm	ASTM D5185(m)		1	1	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>75	4	7	
Sodium	ppm	ASTM D5185(m)		11	8	
Potassium	ppm	ASTM D5185(m)	>20	6	1	




OIL ANALYSIS REPORT

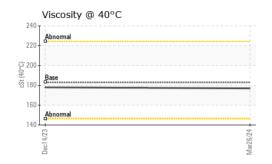

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	VLITE	
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	
Precipitate	scalar	Visual*	NONE	NONE	NONE	
Silt	scalar	Visual*	NONE	NONE	NONE	
Debris	scalar	Visual*	NONE	VLITE	NONE	
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	
Appearance	scalar	Visual*	NORML	NORML	NORML	
Odor	scalar	Visual*	NORML	NORML	NORML	
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	
Free Water	scalar	Visual*		NEG	NEG	
FLUID PROPERT	TES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	183	177	178	

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					no image
Bottom					no image

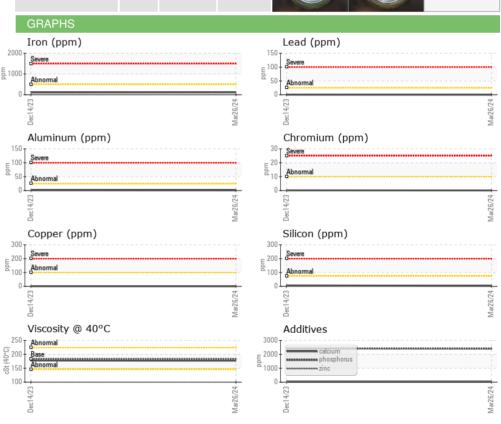



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: WC0920153 Lab Number : 02627070 Unique Number : 5760202

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test Package : MOB 1

Received : 05 Apr 2024 **Tested** : 05 Apr 2024 Diagnosed : 05 Apr 2024 - Wes Davis

Agnico Eagle Canada 1350 Government Rd. W, MACASSA COMPLEX Kirkland Lake, ON

CA P2N 3J1 Contact: Phil St-Denis Phil.St-Denis@agnicoeagle.com T: (705)567-5208

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Contact/Location: Phil St-Denis - KIR370KIR

F: (705)567-5221