




# OIL ANALYSIS REPORT

Sample Rating Trend

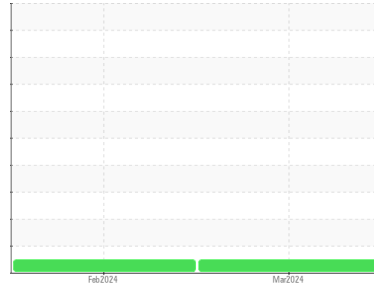

**NORMAL**



Area

**Marsh Bay B barge**

Machine Id

**JOHN DEERE John Deere (S/N PE4045N044168)**

Component

**Diesel Engine**

Fluid

**MOBIL 15W40 (30 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info |             | <b>WC0894282</b>   | WC0894258   | ---      |
| Sample Date   | Client Info |             | <b>15 Mar 2024</b> | 02 Feb 2024 | ---      |
| Machine Age   | hrs         | Client Info | <b>3380</b>        | 2560        | ---      |
| Oil Age       | hrs         | Client Info | <b>820</b>         | 360         | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | ---      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >2.1       | <b>&lt;1.0</b> | <1.0     | ---      |
| Water  | WC Method | >0.21      | <b>NEG</b>     | NEG      | ---      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | ---      |

## WEAR METALS

|           | method | limit/base    | current | history1     | history2 |     |
|-----------|--------|---------------|---------|--------------|----------|-----|
| Iron      | ppm    | ASTM D5185(m) | >51     | <b>6</b>     | 7        | --- |
| Chromium  | ppm    | ASTM D5185(m) | >11     | <b>0</b>     | 0        | --- |
| Nickel    | ppm    | ASTM D5185(m) | >5      | <b>0</b>     | <1       | --- |
| Titanium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | --- |
| Silver    | ppm    | ASTM D5185(m) | >3      | <b>0</b>     | 0        | --- |
| Aluminum  | ppm    | ASTM D5185(m) | >31     | <b>&lt;1</b> | 1        | --- |
| Lead      | ppm    | ASTM D5185(m) | >26     | <b>0</b>     | <1       | --- |
| Copper    | ppm    | ASTM D5185(m) | >26     | <b>&lt;1</b> | <1       | --- |
| Tin       | ppm    | ASTM D5185(m) | >4      | <b>0</b>     | 0        | --- |
| Antimony  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | --- |
| Vanadium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | --- |
| Beryllium | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | --- |
| Cadmium   | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | --- |

## ADDITIVES

|            | method | limit/base    | current | history1     | history2 |     |
|------------|--------|---------------|---------|--------------|----------|-----|
| Boron      | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | 1        | --- |
| Barium     | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | --- |
| Molybdenum | ppm    | ASTM D5185(m) |         | <b>61</b>    | 60       | --- |
| Manganese  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | --- |
| Magnesium  | ppm    | ASTM D5185(m) |         | <b>987</b>   | 992      | --- |
| Calcium    | ppm    | ASTM D5185(m) |         | <b>1052</b>  | 1082     | --- |
| Phosphorus | ppm    | ASTM D5185(m) |         | <b>1018</b>  | 1054     | --- |
| Zinc       | ppm    | ASTM D5185(m) |         | <b>1215</b>  | 1201     | --- |
| Sulfur     | ppm    | ASTM D5185(m) |         | <b>2670</b>  | 2896     | --- |
| Lithium    | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | <1       | --- |

## CONTAMINANTS





|           | method | limit/base    | current | history1     | history2 |     |
|-----------|--------|---------------|---------|--------------|----------|-----|
| Silicon   | ppm    | ASTM D5185(m) | >22     | <b>1</b>     | 3        | --- |
| Sodium    | ppm    | ASTM D5185(m) | >118    | <b>&lt;1</b> | <1       | --- |
| Potassium | ppm    | ASTM D5185(m) | >20     | <b>0</b>     | <1       | --- |

## INFRA-RED

|           | method   | limit/base  | current | history1    | history2 |     |
|-----------|----------|-------------|---------|-------------|----------|-----|
| Soot %    | %        | ASTM D7844* | >3      | <b>0</b>    | 0        | --- |
| Nitration | Abs/cm   | ASTM D7624* | >20     | <b>7.0</b>  | 6.9      | --- |
| Sulfation | Abs./1mm | ASTM D7415* | >30     | <b>19.3</b> | 19.7     | --- |



# OIL ANALYSIS REPORT





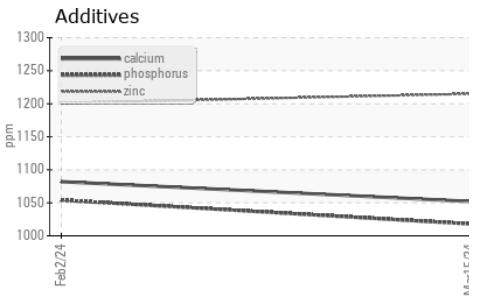
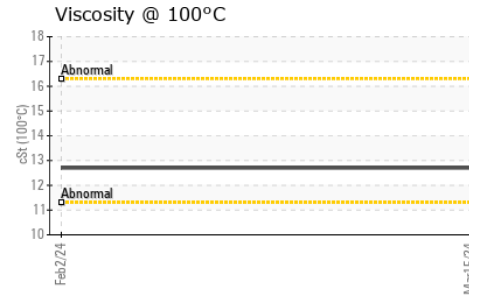
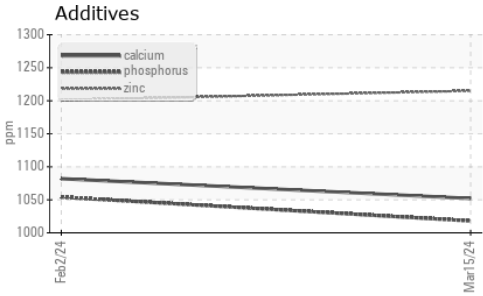
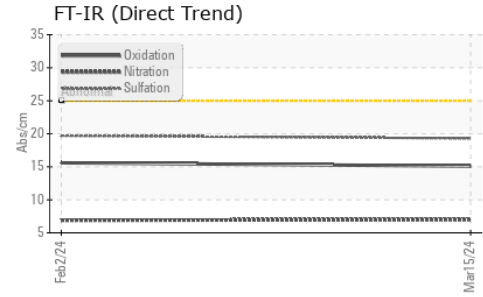


| FLUID DEGRADATION | method   | limit/base  | current | history1    | history2 |     |
|-------------------|----------|-------------|---------|-------------|----------|-----|
| Oxidation         | Abs./1mm | ASTM D7414* | >25     | <b>15.1</b> | 15.6     | --- |
| Base Number (BN)  | mg KOH/g | ASTM D2896* |         | <b>9.87</b> | 10.23    | --- |

| VISUAL           | method | limit/base | current | history1   | history2 |     |
|------------------|--------|------------|---------|------------|----------|-----|
| Emulsified Water | scalar | Visual*    | >0.21   | <b>NEG</b> | NEG      | --- |
| Free Water       | scalar | Visual*    |         | <b>NEG</b> | NEG      | --- |

| FLUID PROPERTIES | method | limit/base    | current | history1    | history2 |     |
|------------------|--------|---------------|---------|-------------|----------|-----|
| Visc @ 100°C     | cSt    | ASTM D7279(m) |         | <b>12.7</b> | 12.7     | --- |

## GRAPHS

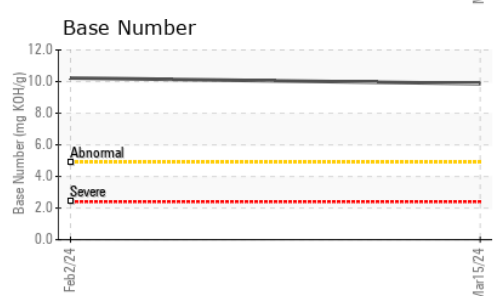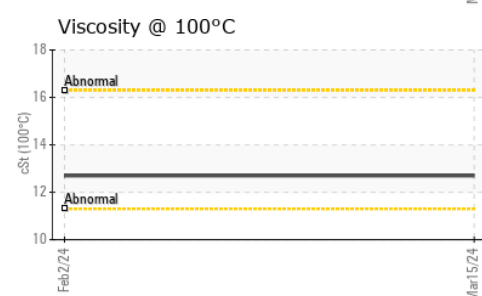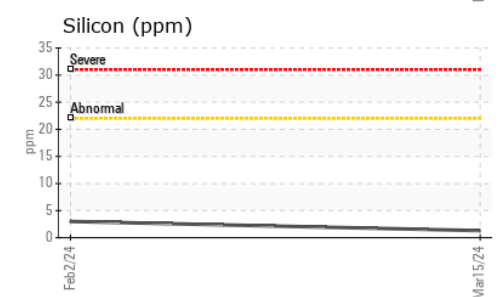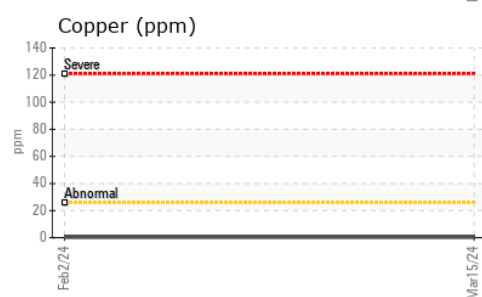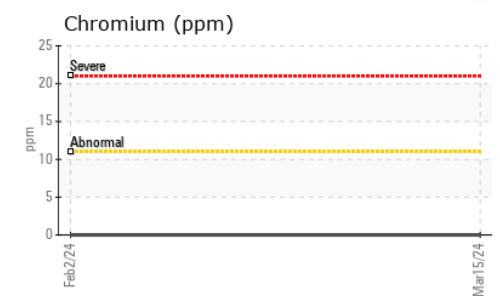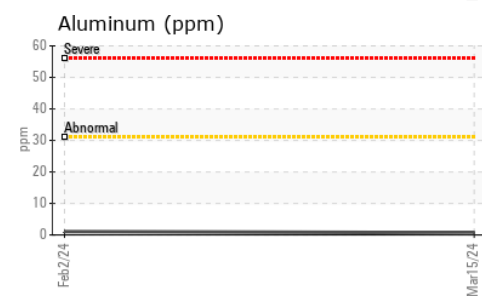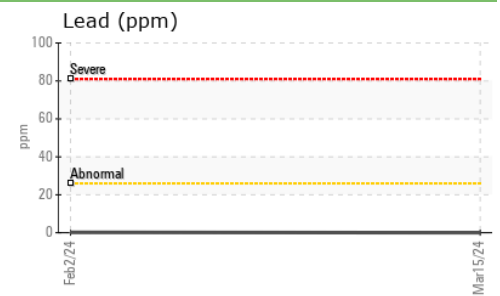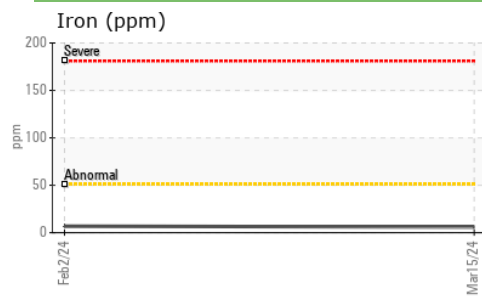

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0894282      **Received** : 08 Apr 2024  
**Lab Number** : **02627250**      **Tested** : 09 Apr 2024  
**Unique Number** : 5760382      **Diagnosed** : 09 Apr 2024 - Wes Davis  
**Test Package** : MOB 2

**Mowi Canada West**  
 7200 Coho Road  
 Port Hardy, BC  
 CA V0N 2P0  
 Contact: Brian Dalton  
 brian.dalton@mowi.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.