




# OIL ANALYSIS REPORT

Sample Rating Trend

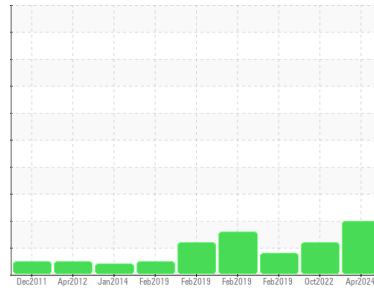

ISO



Area

[114101]

Machine Id

PRESS #2

Component

Hydraulic System

Fluid

PETRO CANADA HYDREX AW 68 (--- LTR)

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0796129	WC0616924	WC0317990
Sample Date	Client Info		04 Apr 2024	06 Oct 2022	04 Feb 2019
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	Filtered	N/A
Sample Status			ABNORMAL	ABNORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	2	4	4
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	0	0	0
Lead	ppm	ASTM D5185(m)	>20	0	<1	<1
Copper	ppm	ASTM D5185(m)	>20	10	3	1
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Antimony	ppm	ASTM D5185(m)		0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<1	<1	0
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	0	<1	0	<1
Calcium	ppm	ASTM D5185(m)	50	19	26	66
Phosphorus	ppm	ASTM D5185(m)	330	288	326	310
Zinc	ppm	ASTM D5185(m)	430	261	284	402
Sulfur	ppm	ASTM D5185(m)	760	540	596	706
Lithium	ppm	ASTM D5185(m)		<1	<1	0

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	0	0	0
Sodium	ppm	ASTM D5185(m)		<1	<1	0
Potassium	ppm	ASTM D5185(m)	>20	1	2	0


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 38943	▲ 17553	● 5900
Particles >6µm	ASTM D7647	>1300	▲ 6265	▲ 2634	● 1367
Particles >14µm	ASTM D7647	>160	● 274	82	67
Particles >21µm	ASTM D7647	>40	● 78	23	23
Particles >38µm	ASTM D7647	>10	9	1	0
Particles >71µm	ASTM D7647	>3	1	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/20/15	▲ 21/19/14	● 20/18/13




# OIL ANALYSIS REPORT


## Particle Trend

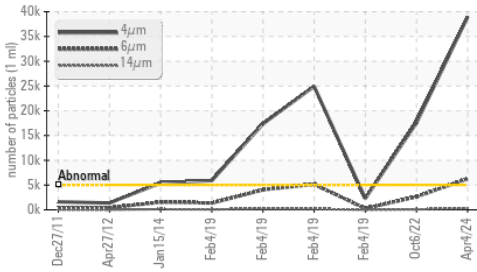


## Particle Trend

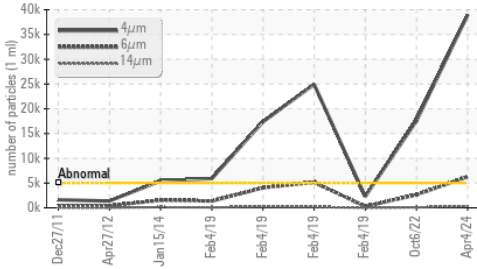

## Acid Number

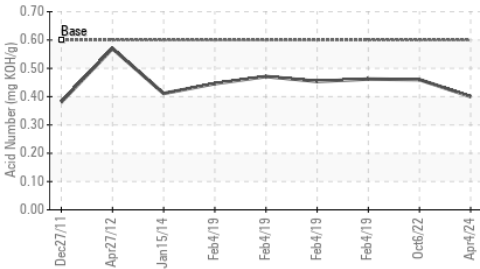

## Viscosity @ 40°C

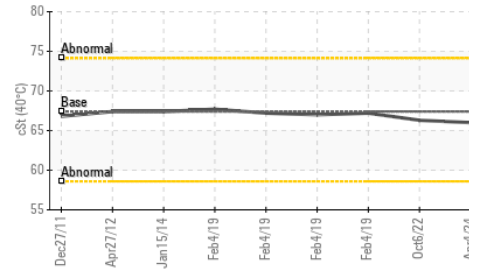


## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN) mg KOH/g	ASTM D974*	0.60	<b>0.40</b>	0.46	0.462
VISUAL					
method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	VLITE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG

## FLUID PROPERTIES


method	limit/base	current	history1	history2		
Visc @ 40°C	cSt	ASTM D7279(m)	67.4	<b>66.0</b>	66.3	67.2

## SAMPLE IMAGES

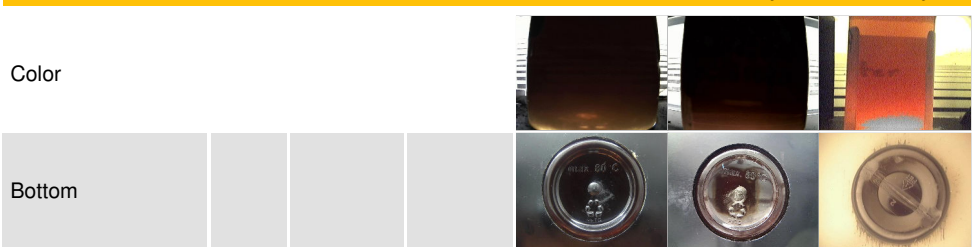


## GRAPHS


### Ferrous Alloys

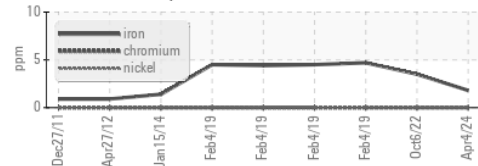


### Non-ferrous Metals

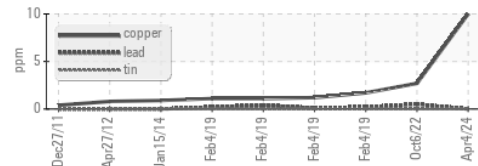


### Viscosity @ 40°C

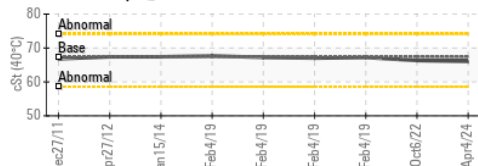

### Particle Count

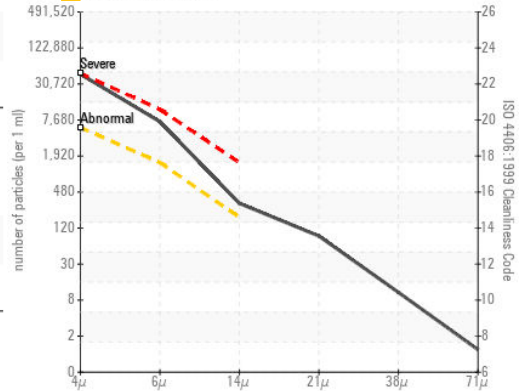

### Acid Number

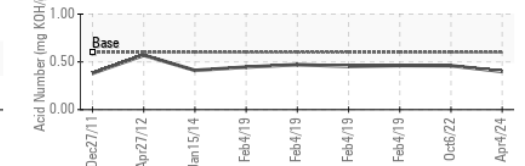

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0796129  
**Lab Number** : 02627362  
**Unique Number** : 5760494  
**Test Package** : IND 2

**SPECTRA ALUMINUM PRODUCTS INC.**  
 95 REAGENS INDUSTRIAL PKWY  
 BRADFORD, ON  
 CA L3Z 2A4  
 Contact: Chris Mayr  
 cmayr@spectraaluminum.com  
 T: (905)778-8093  
 F: (905)778-8054

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.