




# OIL ANALYSIS REPORT

Sample Rating Trend

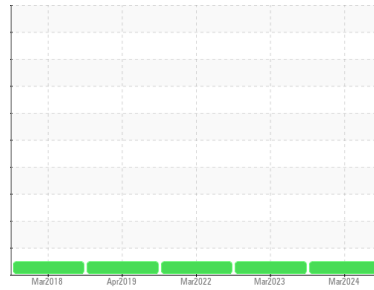

**NORMAL**



Machine Id  
**LOHMANN STOLTER FOHT SOUTH (S/N 76120)**  
 Component  
**Gearbox**  
 Fluid  
**SHELL SPIRAX HD 80W90 (120 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0926542</b>	WC0802598	WC0449451
Sample Date	Client Info			<b>28 Mar 2024</b>	24 Mar 2023	25 Mar 2022
Machine Age	hrs	Client Info		<b>11932</b>	11372	10765
Oil Age	hrs	Client Info		<b>0</b>	1700	0
Oil Changed	Client Info			<b>Not Changed</b>	N/A	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>0</b>	0	0
Iron	ppm	ASTM D5185(m)	>200	<b>7</b>	6	8
Chromium	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>15	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>100	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>200	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>25	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	234	<b>253</b>	257	258
Barium	ppm	ASTM D5185(m)	0.1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185(m)	0.4	<b>8</b>	6	8
Phosphorus	ppm	ASTM D5185(m)	864	<b>1008</b>	1121	1064
Zinc	ppm	ASTM D5185(m)	0.6	<b>3</b>	3	4
Sulfur	ppm	ASTM D5185(m)	16893	<b>18656</b>	19713	18680
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>0</b>	<1	2
Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>1.60</b>	1.70	1.76




# OIL ANALYSIS REPORT

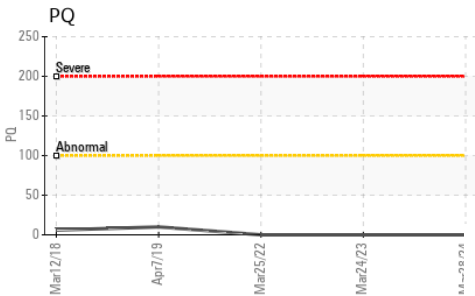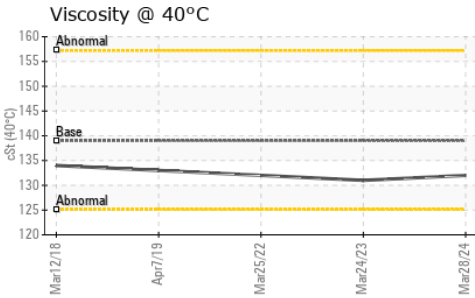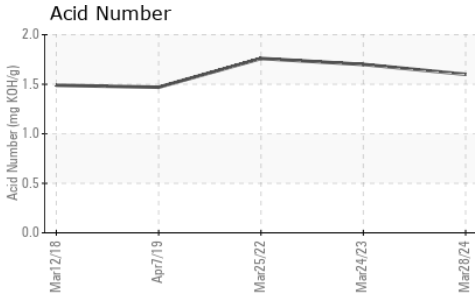






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	139	<b>132</b>	131

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

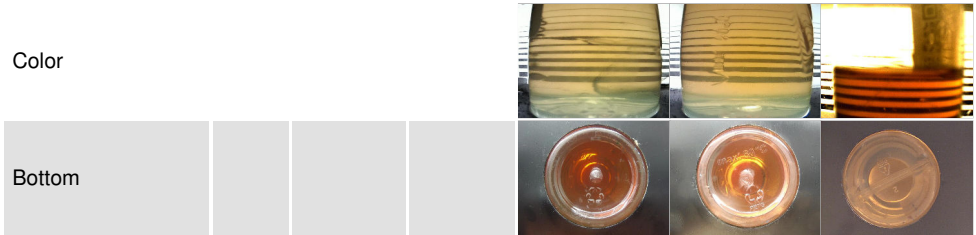

## GRAPHS

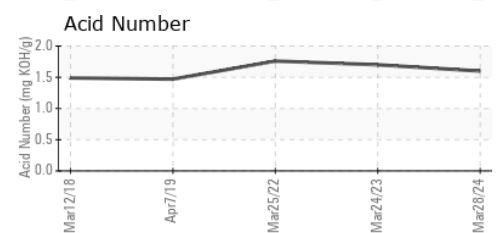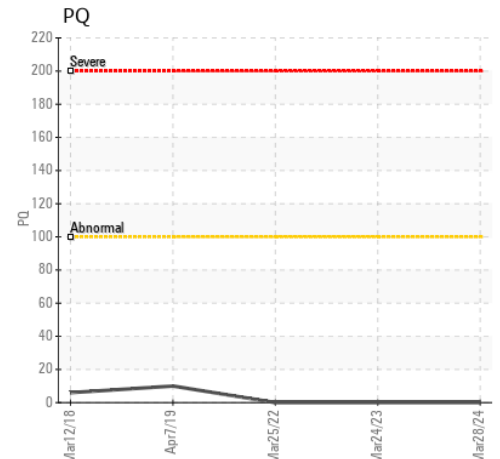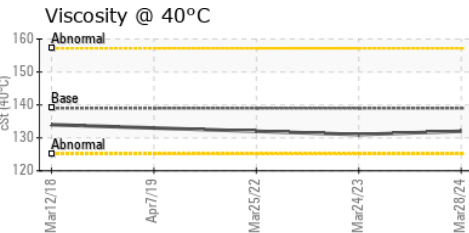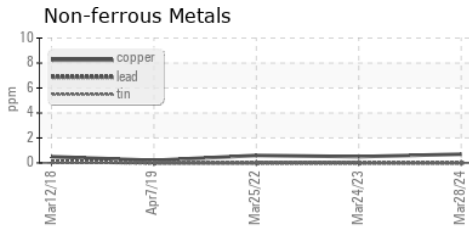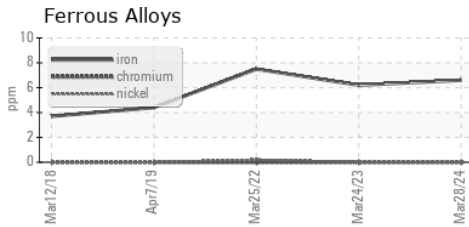

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0926542      **Received** : 08 Apr 2024  
**Lab Number** : **02627480**      **Tested** : 09 Apr 2024  
**Unique Number** : 5760612      **Diagnosed** : 09 Apr 2024 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**CALEDON SKI CLUB**  
 17431 MISSISSAUGA ROAD  
 CALEDON, ON  
 CA L7K 0E9  
 Contact: Jamie Sievwright  
 jsiewwright@caledonskiclub.on.ca  
 T: (519)927-5221  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.