


COOLANT REPORT

Sample Rating Trend







Machine Id **MAIN AIR COMP**

Coolant

Fluid
HYBRID (HOAT) COOLANT (--- GAL)

Recommendation

The fluid is suitable for further service. Resample at the next service interval to monitor.

Corrosion

All metal levels are normal indicating no corrosion in the cooling system.

Contaminants

There is no indication of any contamination in the coolant.


Coolant Condition


The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable.

| SAMPLE INFORMATION method limit/base current history1 | history2 |
|--|-------------------------------------|
| Sample Number Client Info WC0926543 WC0802602 | |
| Sample Date Client Info 28 Mar 2024 06 Apr 2023 | |
| Machine Age hrs Client Info 1112 600 | |
| Oil Age hrs Client Info 0 | |
| Oil Changed Client Info N/A N/A | |
| Sample Status NORMAL NORMAL | |
| PHYSICAL TEST RESULTS method limit/base current history1 | history2 |
| Glycol Type FT-IR UNK | |
| Specific Gravity ASTM D1298* 1.063 1.063 | |
| pH Scale 0.14 ASTM D1287* 9.07 8.75 | |
| Nitrites ppm Alcan Test Kit* 400 640 | |
| Reserve Alkalinity Scale 0-20 ASTM D1121* 9.6 7.8 | |
| Percentage Glycol % ASTM D3321* 46.4 46.4 | |
| Freezing Point °C ASTM D3321* -32 -26 | |
| Carboxylate | |
| CORROSION INHIBITORS method limit/base current history1 | history2 |
| Silicon ppm ASTM D5185(m) 4 3 | |
| Phosphorus ppm ASTM D5185(m) 2023 2151 | |
| | |
| Boron ppm ASTM D5185(m) 12 5 | |
| Boron ppm ASTM D5185(m) 12 5 Molybdenum ppm ASTM D5185(m) 10 3 | |
| Plant name and (m) | |
| Molybdenum ppm ASTM D5185(m) 10 3 | |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 | history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 | history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 | history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 Copper ppm ASTM D5185(m) >10 <1 2 | history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 Copper ppm ASTM D5185(m) >10 <1 2 Lead ppm ASTM D5185(m) >10 0 0 | history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 Copper ppm ASTM D5185(m) >10 <1 2 Lead ppm ASTM D5185(m) >10 0 0 Tin ppm ASTM D5185(m) >10 0 0 | history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 Copper ppm ASTM D5185(m) >10 <1 2 Lead ppm ASTM D5185(m) >10 0 0 Tin ppm ASTM D5185(m) >10 0 0 Silver ppm ASTM D5185(m) >10 <1 0 | history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 Copper ppm ASTM D5185(m) >10 <1 2 Lead ppm ASTM D5185(m) >10 0 0 Tin ppm ASTM D5185(m) >10 0 0 Silver ppm ASTM D5185(m) >10 <1 0 Zinc ppm ASTM D5185(m) <1 0 | history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 Copper ppm ASTM D5185(m) >10 <1 2 Lead ppm ASTM D5185(m) >10 0 0 Tin ppm ASTM D5185(m) >10 0 0 Silver ppm ASTM D5185(m) >10 <1 0 Zinc ppm ASTM D5185(m) <1 0 CARRIER SALTS method limit/base current history1 | history2 history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 Copper ppm ASTM D5185(m) >10 <1 2 Lead ppm ASTM D5185(m) >10 0 0 Tin ppm ASTM D5185(m) >10 0 0 Silver ppm ASTM D5185(m) >10 <1 0 Zinc ppm ASTM D5185(m) <1 0 CARRIER SALTS method limit/base current history1 Sodium ppm ASTM D5185(m) 137 132 | history2 history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 Copper ppm ASTM D5185(m) >10 <1 2 Lead ppm ASTM D5185(m) >10 0 0 Tin ppm ASTM D5185(m) >10 0 0 Silver ppm ASTM D5185(m) >10 <1 0 Zinc ppm ASTM D5185(m) <1 0 CARRIER SALTS method limit/base current history1 Sodium ppm ASTM D5185(m) 137 132 Potassium ppm ASTM D5185(m) 5027 3304 | history2 history2 history2 |
| Molybdenum ppm ASTM D5185(m) 10 3 CORROSION method limit/base current history1 Iron ppm ASTM D5185(m) >15 1 3 Aluminum ppm ASTM D5185(m) >10 <1 <1 Copper ppm ASTM D5185(m) >10 <1 2 Lead ppm ASTM D5185(m) >10 0 0 Tin ppm ASTM D5185(m) >10 0 0 Silver ppm ASTM D5185(m) >10 <1 0 Zinc ppm ASTM D5185(m) <1 0 CARRIER SALTS method limit/base current history1 Sodium ppm ASTM D5185(m) 5027 3304 SCALE POTENTIAL method limit/base current history1 | history2 history2 history2 history2 |



COOLANT REPORT

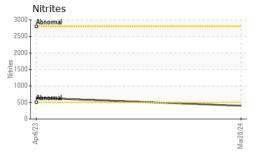

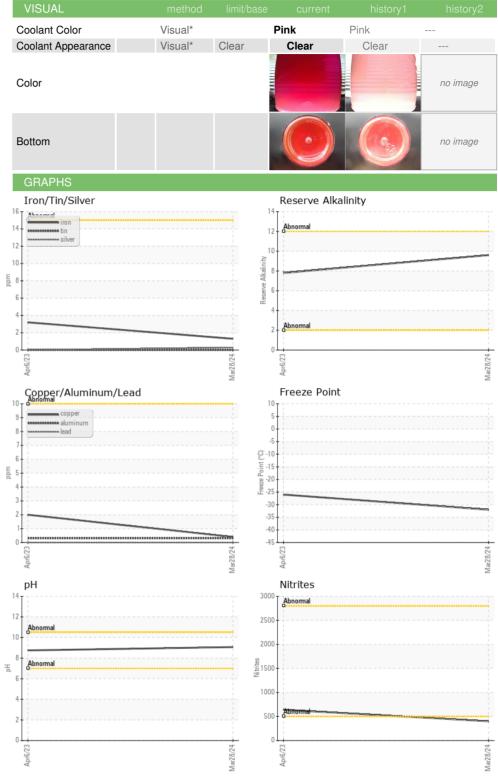





Laboratory

Sample No.

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0926543 Lab Number : 02627530

Received **Tested** Diagnosed

: 08 Apr 2024 : 10 Apr 2024 : 10 Apr 2024 - Kevin Marson

Unique Number : 5760662 Test Package : COOL (Additional Tests: GlycolType) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

CALEDON SKI CLUB

17431 MISSISSAUGA ROAD CALEDON, ON CA L7K 0E9 Contact: Jamie Sievwright jsievwright@caledonskiclub.on.ca

T: (519)927-5221