



# FUEL REPORT

Sample Rating Trend



**NORMAL**



Area  
**[45397]**  
 Machine Id  
**KIOTI VW7000041**  
 Component  
**Diesel Fuel**  
 Fluid  
**No.1 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)**

## DIAGNOSIS

### Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. Resample at the next service interval to monitor.

### Contaminants

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. There is no indication of any contamination in the diesel fuel.

### Fuel Condition

All laboratory tests indicate that this sample meets specifications for No.1 ultra-low-sulfur diesel fuel (US EPA/CGSB-3.517-3 type A).

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KT0000986</b>	---	---
Sample Date	Client Info			<b>03 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		ASTM D1298*	0.825	<b>0.817</b>	---	---
Fuel Color	text	Visual Screen*	Clear	<b>Yellow</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	1.8	<b>1.7</b>	---	---
Pensky-Martens Flash Point	°C	ASTM D7215*	38	<b>48</b>	---	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	10	<b>6</b>	---	---

DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*	159	<b>154</b>	---	---
5% Distillation Point	°C	ASTM D2887*		<b>172</b>	---	---
10% Distill Point	°C	ASTM D2887*	184	<b>178</b>	---	---
15% Distillation Point	°C	ASTM D2887*		<b>185</b>	---	---
20% Distill Point	°C	ASTM D2887*	196	<b>191</b>	---	---
30% Distill Point	°C	ASTM D2887*	205	<b>201</b>	---	---
40% Distill Point	°C	ASTM D2887*	216	<b>213</b>	---	---
50% Distill Point	°C	ASTM D2887*	227	<b>224</b>	---	---
60% Distill Point	°C	ASTM D2887*	238	<b>236</b>	---	---
70% Distill Point	°C	ASTM D2887*	251	<b>249</b>	---	---
80% Distill Point	°C	ASTM D2887*	264	<b>266</b>	---	---
85% Distillation Point	°C	ASTM D2887*		<b>279</b>	---	---
90% Distill Point	°C	ASTM D2887*	288	<b>291</b>	---	---
95% Distillation Point	°C	ASTM D2887*		<b>312</b>	---	---
Final Boiling Point	°C	ASTM D2887*	309	<b>333</b>	---	---






IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	40.1	<b>41</b>	---	---
Cetane Index		ASTM D4737*	<40.0	<b>47</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	<b>0</b>	---	---
Sodium	ppm	ASTM D5185(m)	<0.1	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185(m)	<0.1	<b>0</b>	---	---
Water	%	ASTM D6304*	<0.05	<b>0.001</b>	---	---
ppm Water	ppm	ASTM D6304*	<500	<b>13</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	<b>356</b>	---	---
Particles >6µm		ASTM D7647	>640	<b>113</b>	---	---
Particles >14µm		ASTM D7647	>80	<b>12</b>	---	---
Particles >21µm		ASTM D7647	>20	<b>4</b>	---	---
Particles >38µm		ASTM D7647	>4	<b>1</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>18/16/13	<b>16/14/11</b>	---	---






# FUEL REPORT

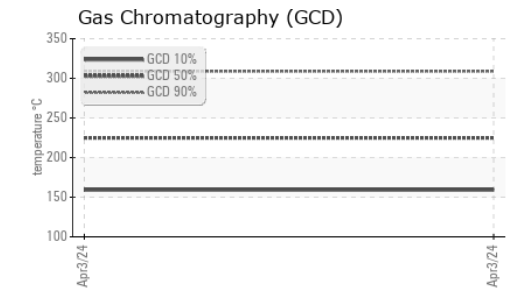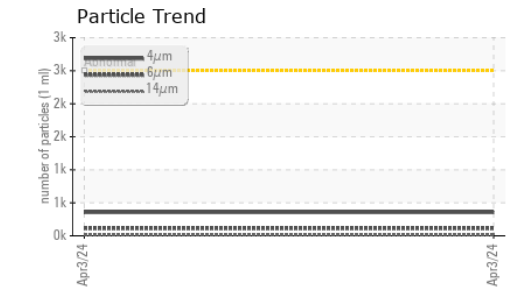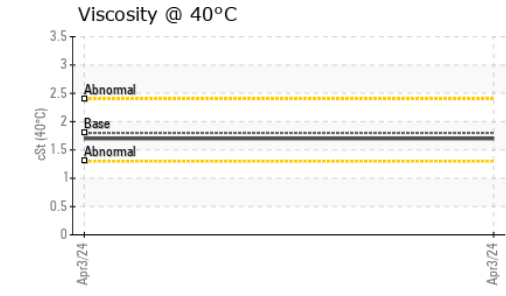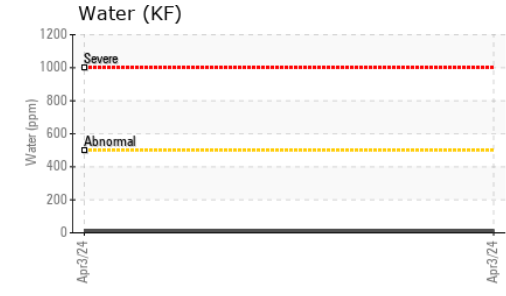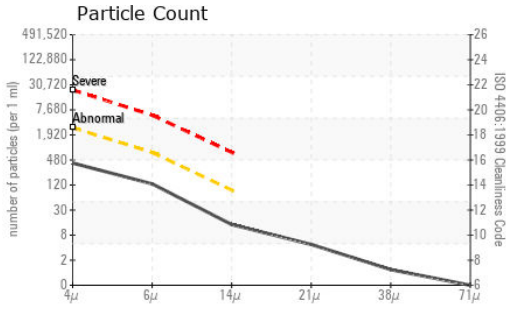

HEAVY METALS	method	limit/base	current	history1	history2	
Aluminum	ppm	ASTM D5185(m)	<0.1	0	---	---
Nickel	ppm	ASTM D5185(m)	<0.1	0	---	---
Lead	ppm	ASTM D5185(m)	<0.1	0	---	---
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---	---
Iron	ppm	ASTM D5185(m)	<0.1	0	---	---
Calcium	ppm	ASTM D5185(m)	<0.1	0	---	---
Magnesium	ppm	ASTM D5185(m)	<0.1	0	---	---
Phosphorus	ppm	ASTM D5185(m)	<0.1	<1	---	---
Zinc	ppm	ASTM D5185(m)	<0.1	0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

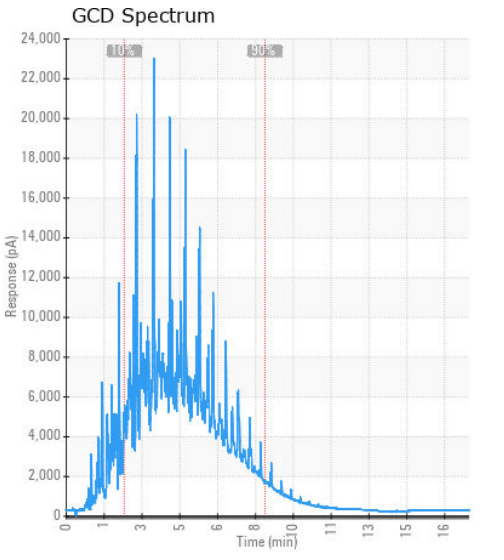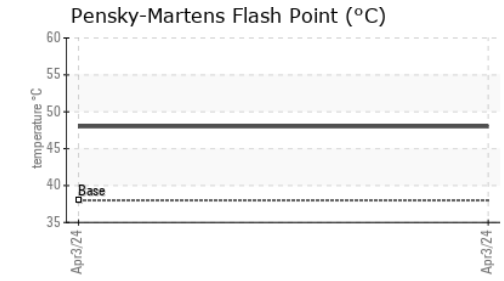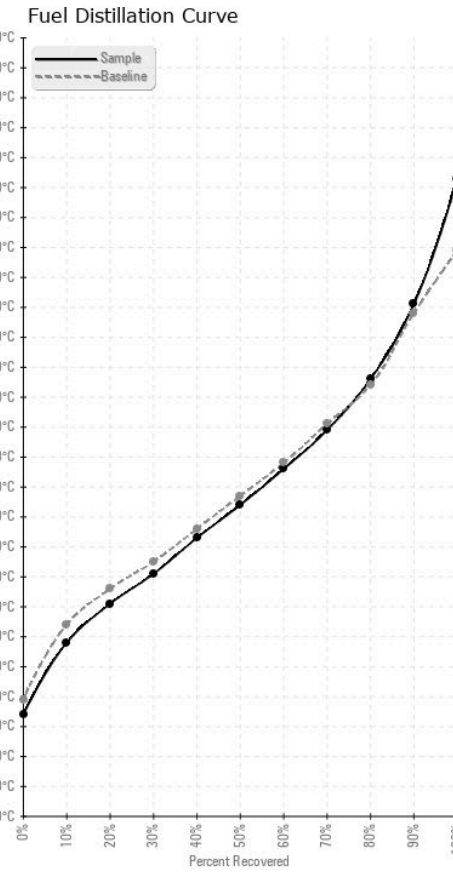

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : KT0000986 **Received** : 08 Apr 2024  
**Lab Number** : 02627541 **Tested** : 15 Apr 2024  
**Unique Number** : 5760673 **Diagnosed** : 15 Apr 2024 - Kevin Marson  
**Test Package** : FUEL ( Additional Tests: CC Flash, PrtCount )

**GG Hache et Freres Ltee**  
 4002 Boulevard des Fondateurs  
 Saint-Isidore, NB  
 CA E8M 1E8  
 Contact: Charles Le Bouthillier  
 charles\_le\_bouthillier@hotmail.com  
 T: (506)358-2203  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.