




OIL ANALYSIS REPORT

Sample Rating Trend

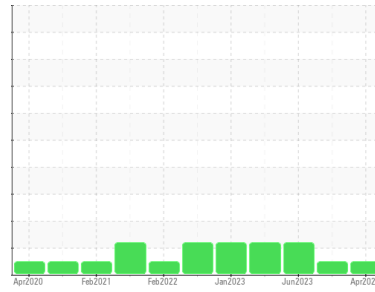

NORMAL



Area
[44095971]

Machine Id
L1275

Component
Diesel Engine

Fluid
 DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0924170	WC0853195	WC0796555
Sample Date	Client Info		08 Apr 2024	28 Oct 2023	10 Jun 2023
Machine Age	kms	Client Info	469410	447874	432991
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	▲ 2.5
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	31	30	11
Chromium	ppm	ASTM D5185(m)	>20	2	1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	5	3	2
Lead	ppm	ASTM D5185(m)	>40	5	6	1
Copper	ppm	ASTM D5185(m)	>330	1	2	3
Tin	ppm	ASTM D5185(m)	>15	0	<1	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	30	29	54
Barium	ppm	ASTM D5185(m)	10	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	2	3	3
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)	450	734	736	711
Calcium	ppm	ASTM D5185(m)	3000	1340	1347	1386
Phosphorus	ppm	ASTM D5185(m)	1150	680	685	723
Zinc	ppm	ASTM D5185(m)	1350	774	768	756
Sulfur	ppm	ASTM D5185(m)	4250	2414	2458	2508
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	5	4
Sodium	ppm	ASTM D5185(m)		3	3	3
Potassium	ppm	ASTM D5185(m)	>20	4	4	4

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	0.3	0.4	0.1
Nitration	Abs/cm	ASTM D7624*	>20	12.3	11.3	10.5
Sulfation	Abs.1mm	ASTM D7415*	>30	26.8	25.8	21.6



OIL ANALYSIS REPORT

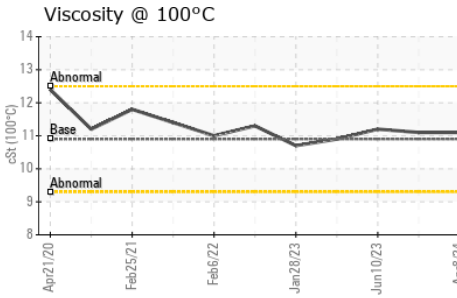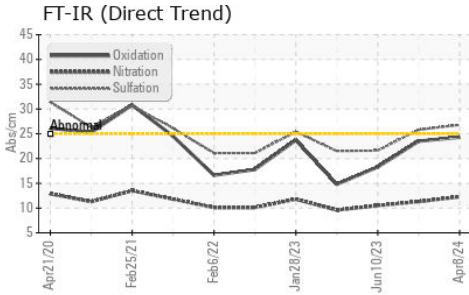

FLUID DEGRADATION	method	limit/base	current	history1	history2
-------------------	--------	------------	---------	----------	----------

Oxidation	Abs./1mm	ASTM D7414*	>25	24.3	23.5	18.3
-----------	----------	-------------	-----	-------------	------	------

VISUAL	method	limit/base	current	history1	history2
--------	--------	------------	---------	----------	----------









Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
------------------	--------	---------	------	------------	-----	-----

Free Water	scalar	Visual*		NEG	NEG	NEG
------------	--------	---------	--	------------	-----	-----

FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.1	11.1	▲ 11.2
--------------	-----	---------------	------	-------------	------	--------

GRAPHS

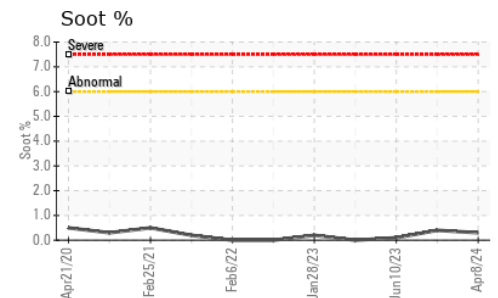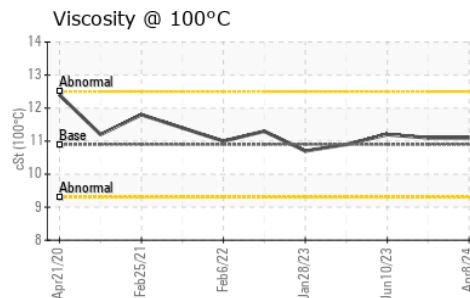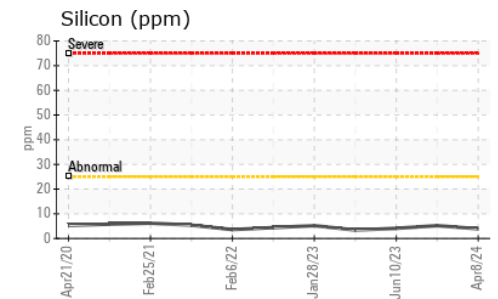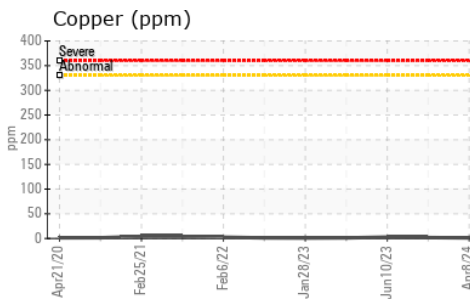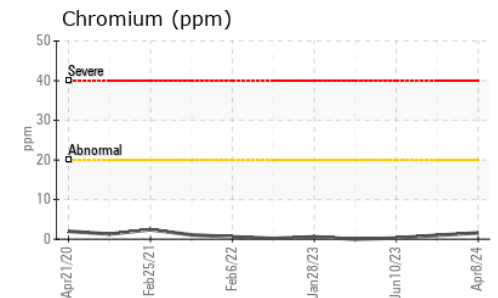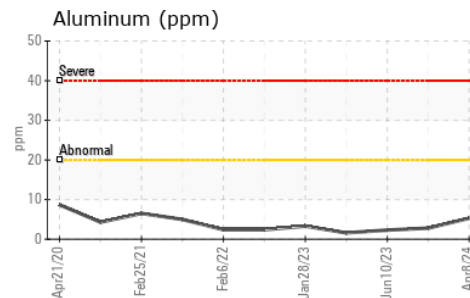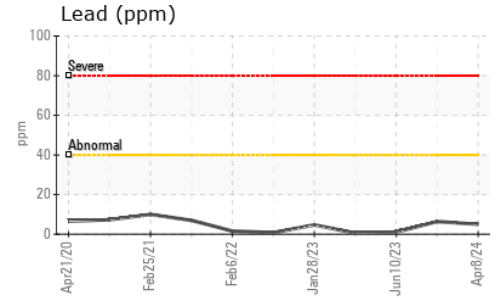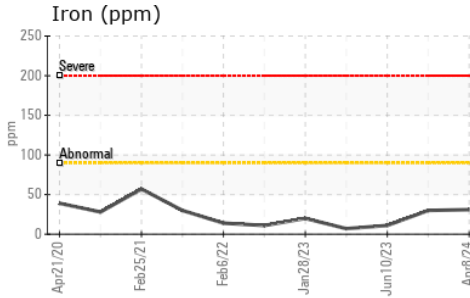

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0924170
Lab Number : **02627677**
Unique Number : 5760809
Test Package : MOB 1
Received : 09 Apr 2024
Tested : 09 Apr 2024
Diagnosed : 09 Apr 2024 - Wes Davis

Rush Truck Centres
 7450 Torbram Rd.
 Mississauga, ON
 CA L4T 1G9
 Contact: Serdar Okur
 sokur@rushtruckcentres.ca
 T: (905)671-7600
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.