



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id

**KENWORTH KENWORTH T800**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC02627773</b>	---	---
Sample Date	Client Info			<b>04 Apr 2024</b>	---	---
Machine Age	kms	Client Info		<b>1300000</b>	---	---
Oil Age	kms	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2		<b>NEG</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>28</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>3</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>7</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>77</b>	---	---
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	100	<b>103</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	450	<b>1015</b>	---	---
Calcium	ppm	ASTM D5185(m)	3000	<b>1533</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1010</b>	---	---
Zinc	ppm	ASTM D5185(m)	1350	<b>1248</b>	---	---
Sulfur	ppm	ASTM D5185(m)	4250	<b>2531</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	---	---
Sodium	ppm	ASTM D5185(m)	>216	<b>6</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.4</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.8</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>28.1</b>	---	---



# OIL ANALYSIS REPORT










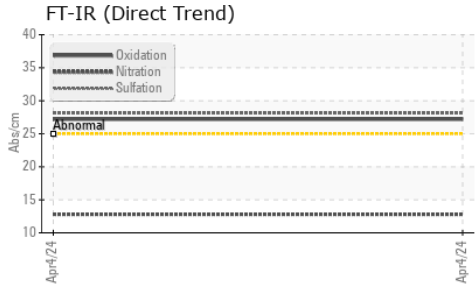


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>27.2</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	8.5	<b>9.57</b>	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>14.8</b>	---	---

## GRAPHS

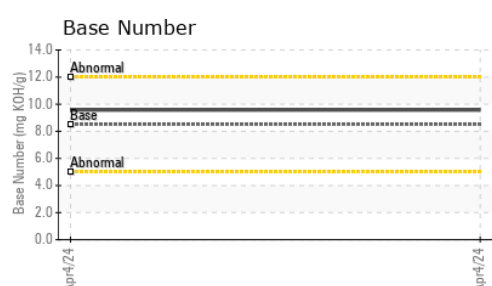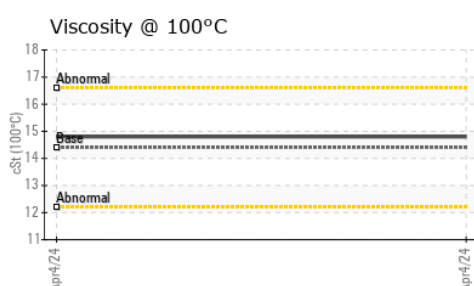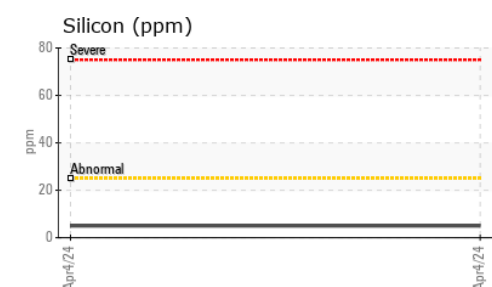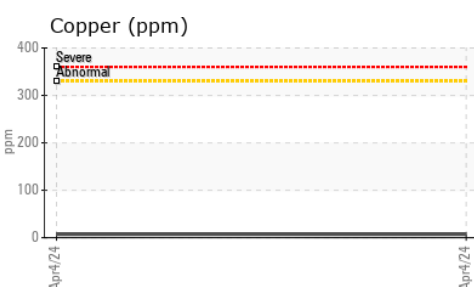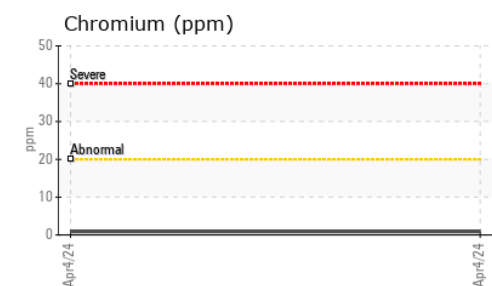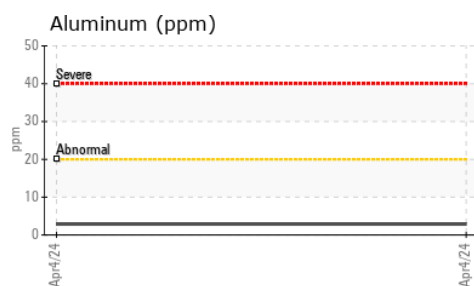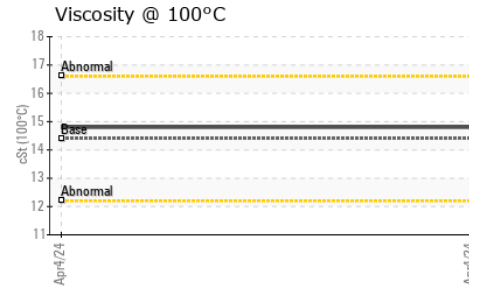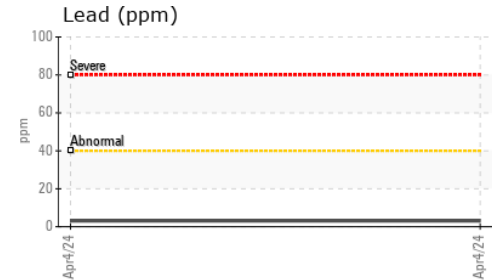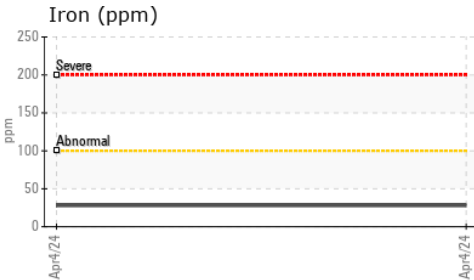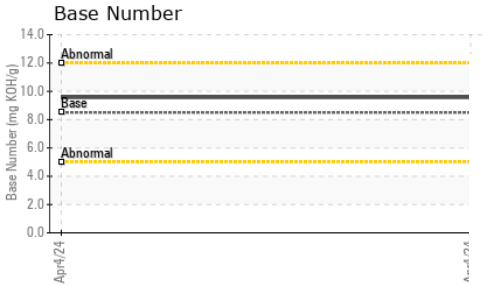

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC02627773      **Received** : 10 Apr 2024  
**Lab Number** : **02627773**      **Tested** : 10 Apr 2024  
**Unique Number** : 5760905      **Diagnosed** : 10 Apr 2024 - Kevin Marson  
**Test Package** : MOB 2

**VANDECK TRUCKING LTD**  
 19 LOUISA DR  
 GUELPH, ON  
 CA N1E 4T4  
 Contact: Service Manager  
 vandectrucking2008ltd@gmail.com  
 T: (437)324-8591  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.