



OIL ANALYSIS REPORT

Sample Rating Trend



DEGRADATION



Machine Id
FORD 2014 FORD EDGE
 Component
Gasoline Engine
 Fluid
AGIP 5W20 SEMI SYNTHETIC (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The BN result is marginal and reaching the low end of its acceptable limit, indicating the remaining reserve alkalinity is depleting. The oil is no longer serviceable.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0884224	---	---
Sample Date	Client Info			09 Apr 2024	---	---
Machine Age	mls	Client Info		59689	---	---
Oil Age	mls	Client Info		10624	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				MARGINAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	---	---
Water	WC Method	>0.2		NEG	---	---
Glycol	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>150	13	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>40	4	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>155	22	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		24	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		64	---	---
Manganese	ppm	ASTM D5185(m)		7	---	---
Magnesium	ppm	ASTM D5185(m)		501	---	---
Calcium	ppm	ASTM D5185(m)		909	---	---
Phosphorus	ppm	ASTM D5185(m)		630	---	---
Zinc	ppm	ASTM D5185(m)		737	---	---
Sulfur	ppm	ASTM D5185(m)		2243	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	29	---	---
Sodium	ppm	ASTM D5185(m)	>400	9	---	---
Potassium	ppm	ASTM D5185(m)	>20	7	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	12.3	---	---
Sulfation	Abs./1mm	ASTM D7415*	>30	30.4	---	---



OIL ANALYSIS REPORT






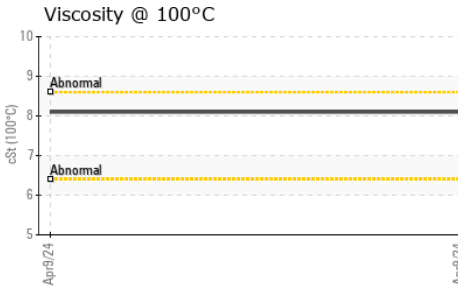
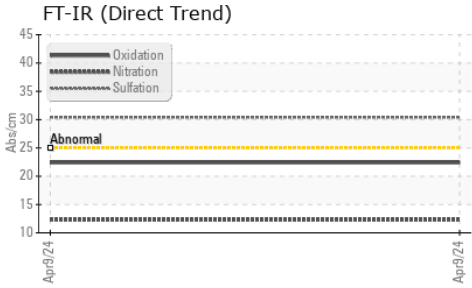
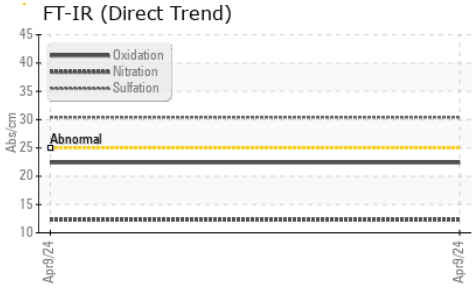


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	22.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		▲ 2.80	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)		8.1	---	---

GRAPHS

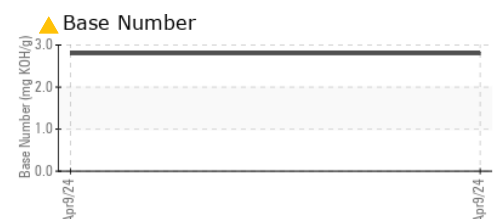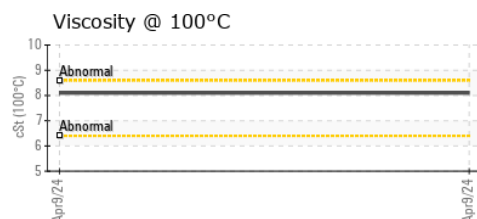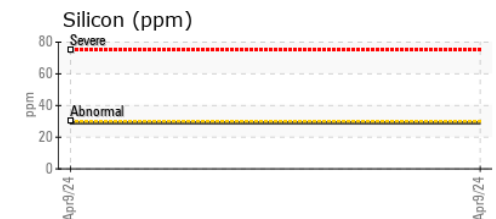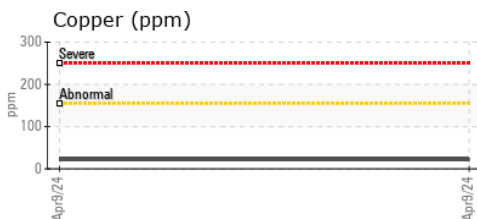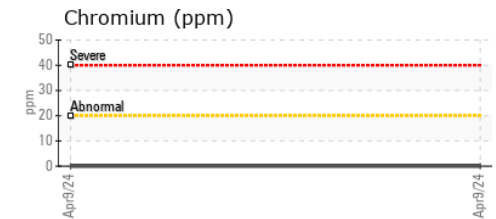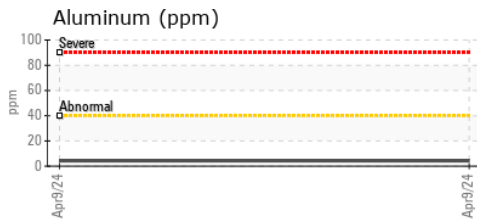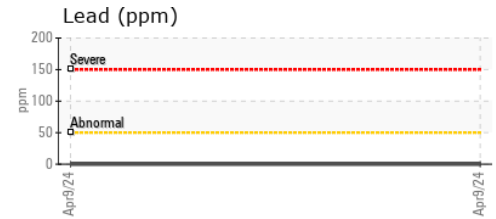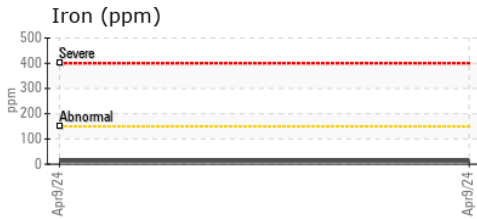

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0884224 **Received** : 10 Apr 2024
Lab Number : **02627774** **Tested** : 10 Apr 2024
Unique Number : 5760906 **Diagnosed** : 10 Apr 2024 - Kevin Marson
Test Package : MOB 2

Lloyd McMaster
 116-10 Concord Place
 Grimsby, ON
 CA L3M 0G6
 Contact: Lloyd McMaster
 lloydcmaster@cogeco.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.