




# OIL ANALYSIS REPORT

Sample Rating Trend

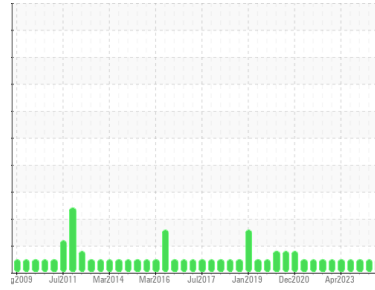

**NORMAL**



Area

**System 72 - Essential Power Generation**

Machine Id

**Z-7201B Essential Power Diesel Engine Lube Oil**

Component

**Diesel Engine**

Fluid

**IRVING IDO UNIVERSAL SAE 15W40 (830 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PP</b>	PP	PP
Sample Date	Client Info		<b>29 Mar 2024</b>	06 Oct 2023	23 Aug 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>16</b>	16
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	1
Lead	ppm	ASTM D5185(m)	>40	<b>7</b>	8
Copper	ppm	ASTM D5185(m)	>330	<b>173</b>	175
Tin	ppm	ASTM D5185(m)	>15	<b>1</b>	1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>22</b>	21
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1
Molybdenum	ppm	ASTM D5185(m)		<b>1</b>	2
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	0
Magnesium	ppm	ASTM D5185(m)		<b>10</b>	8
Calcium	ppm	ASTM D5185(m)		<b>2242</b>	2248
Phosphorus	ppm	ASTM D5185(m)		<b>881</b>	908
Zinc	ppm	ASTM D5185(m)	1300	<b>1062</b>	1052
Sulfur	ppm	ASTM D5185(m)		<b>2793</b>	2824
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	7
Sodium	ppm	ASTM D5185(m)		<b>3</b>	3
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	1


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.2</b>	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.1</b>	10.3
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>22.5</b>	22.4




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

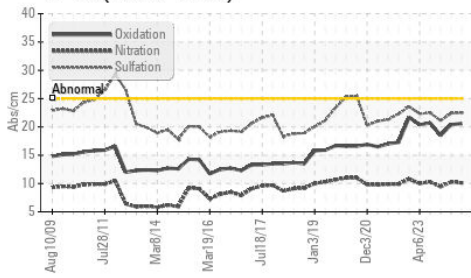

Base Number

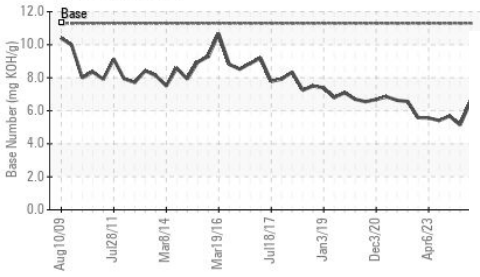

Viscosity @ 100°C

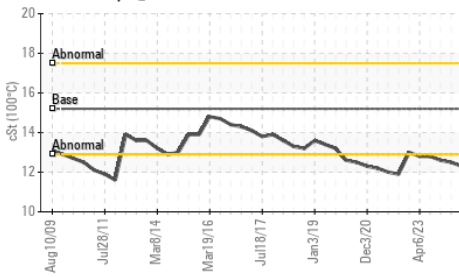


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs.:1mm	ASTM D7414*	>25	<b>20.6</b>	20.4	18.5
Base Number (BN)	mg KOH/g	ASTM D2896*	11.3	<b>6.56</b>	5.14	5.68

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.2	<b>12.3</b>	12.5	12.6

## GRAPHS


Ferrous Alloys

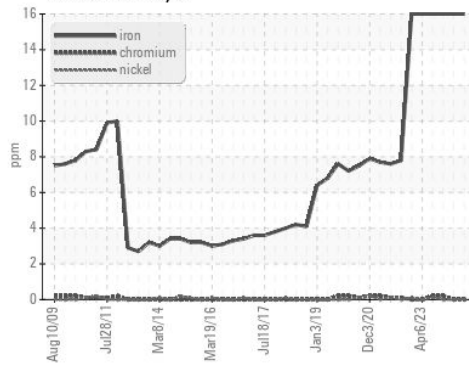


Non-ferrous Metals

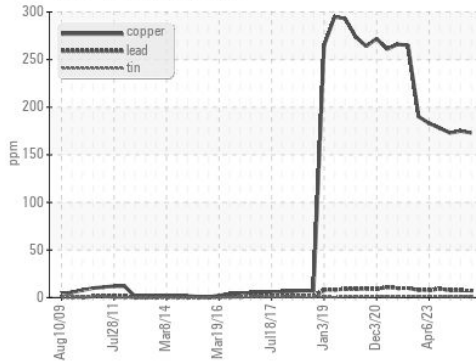

Viscosity @ 100°C

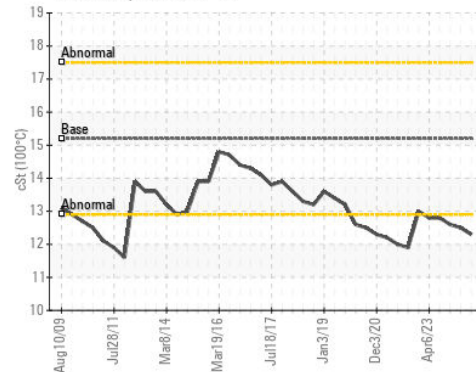

Base Number

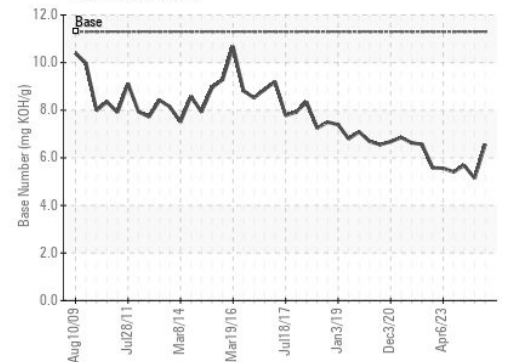

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PP  
**Lab Number** : 02627775  
**Unique Number** : 5760907  
**Test Package** : MAR 2

**HIBERNIA MGMT & DEVELOPMENT CO. LTD**  
 SUITE 1000,, 100 NEW GOWER STREET  
 ST.JOHNS, NL  
 CA A1C 6K3

Contact: Christopher Michelau  
 christopher.j.michelau@exxonmobil.com

*To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.*

T:  
 F: (709)722-3766