




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**CATERPILLAR R1600G SCP215**  
 Component  
**Transmission (Auto)**  
 Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

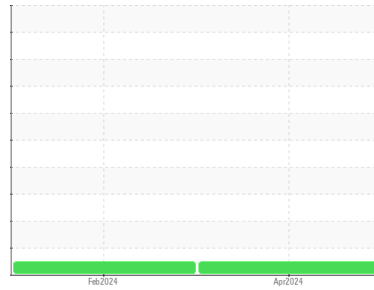

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0928373</b>	WC0905507	---
Sample Date	Client Info			<b>06 Apr 2024</b>	16 Feb 2024	---
Machine Age	hrs	Client Info		<b>3621</b>	3275	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>Not Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>160	<b>23</b>	42	---
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>50	<b>1</b>	3	---
Lead	ppm	ASTM D5185(m)	>50	<b>3</b>	6	---
Copper	ppm	ASTM D5185(m)	>225	<b>8</b>	15	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2	<b>5</b>	6	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>3</b>	5	---
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185(m)	9	<b>56</b>	83	---
Calcium	ppm	ASTM D5185(m)	3114	<b>3368</b>	3240	---
Phosphorus	ppm	ASTM D5185(m)	1099	<b>867</b>	861	---
Zinc	ppm	ASTM D5185(m)	1245	<b>1031</b>	977	---
Sulfur	ppm	ASTM D5185(m)	7086	<b>9923</b>	9104	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	<b>5</b>	9	---
Sodium	ppm	ASTM D5185(m)		<b>2</b>	4	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---




# OIL ANALYSIS REPORT

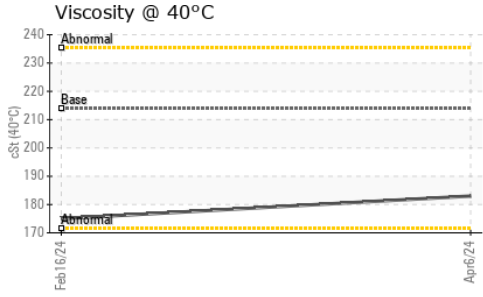









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	213.9	<b>183</b>	175

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

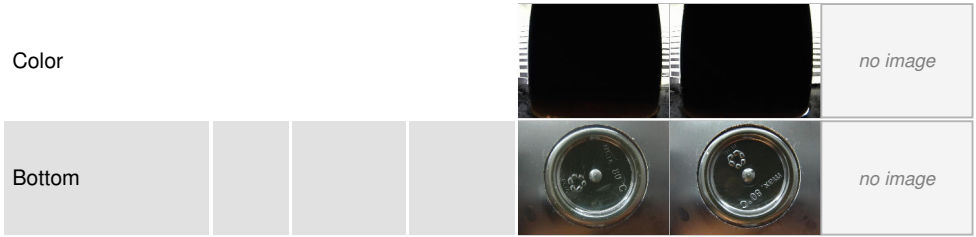

## GRAPHS

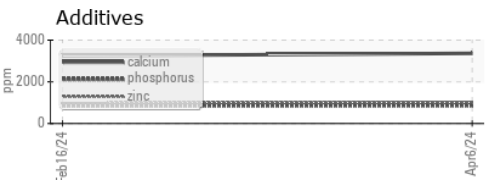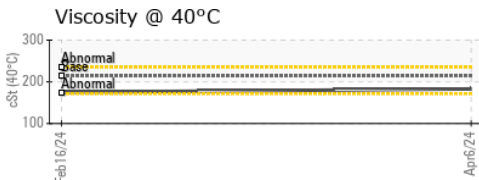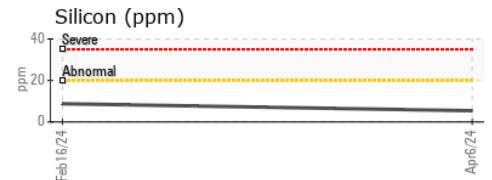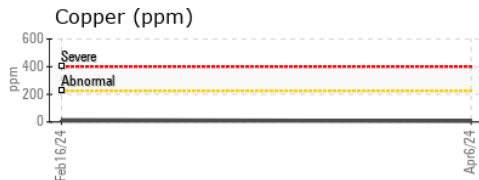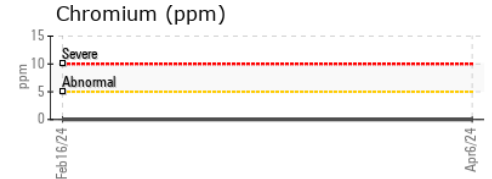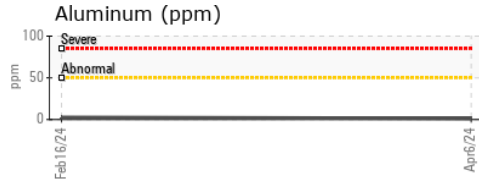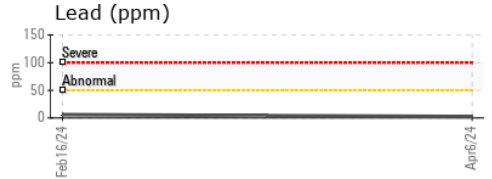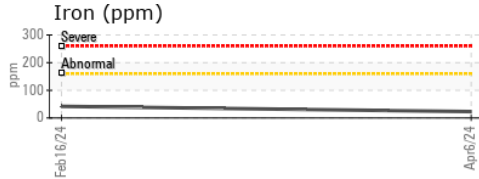

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0928373  
**Lab Number** : **02627959**  
**Unique Number** : 5761091  
**Test Package** : MOB 1

**Agnico Eagle Canada**  
 1350 Government Rd. W, MACASSA COMPLEX  
 Kirkland Lake, ON  
 CA P2N 3J1  
 Contact: Mitch Lamontagne  
 AEM\_KL\_macassaoilsampleresults@agnicoeagle.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T: (705)567-5208  
 F: (705)567-5221