

**OIL ANALYSIS REPORT** 

Machine Id **EF03** 



Sample Rating Trend



**Hydraulic System AW HYDRAULIC OIL ISO 32 (--- GAL)** 

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 32. Please confirm.

NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## Wear

All component wear rates are normal.

### Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Apr2024		
SAMPLE INFORM	MATION	mothed	limit/boss	Olympat	history	history
	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0932078		
Sample Date		Client Info		09 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	3		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<1		
Barium	ppm	ASTM D5185(m)	5	0		
Molybdenum	ppm	ASTM D5185(m)	5	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	25	<1		
Calcium	ppm	ASTM D5185(m)	200	48		
Phosphorus	ppm	ASTM D5185(m)	300	333		
Zinc	ppm	ASTM D5185(m)	370	414		
Sulfur	ppm	ASTM D5185(m)	2500	1470		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	7766		
Particles >6µm		ASTM D7647	>1300	782		
Particles >14μm		ASTM D7647	>160	21		
Particles >21µm		ASTM D7647	>40	4		
Particles >38µm		ASTM D7647	>10	1		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanlinees		ISO 4406 (a)	×10/17/1/	00/17/12		

ISO 4406 (c) >19/17/14 **20/17/12** 

Oil Cleanliness



# **OIL ANALYSIS REPORT**

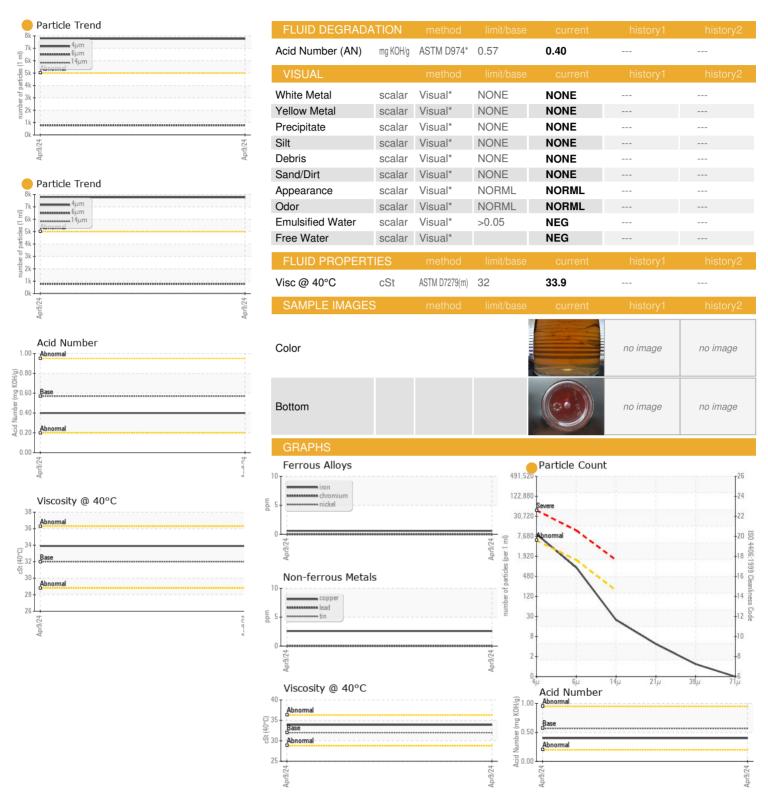





Laboratory

Sample No. Unique Number : 5761146

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Lab Number : 02628014

: WC0932078

**Tested** Diagnosed

Received

: 10 Apr 2024

: 11 Apr 2024

Test Package : IND 2 To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

: 11 Apr 2024 - Wes Davis

Contact: Dan Girotti dan.girotti@voestalpine.com T: (905)336-0014

Voestalpine Rotec Summo Corp.

F: (905)332-5941

Burlington, ON

**CA L7L 4X6** 

4041 North Service Rd.

Contact/Location: Dan Girotti - SUMBUR