

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

1000004731 (S/N H08A0498012)

Hydraulic System

AW HYDRAULIC OIL ISO 46 (2000 LTR)

	G١		

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0839620		
Sample Date		Client Info		04 Apr 2024		
Machine Age		Client Info		0		
Oil Age		Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	4		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<1		
Barium	ppm	ASTM D5185(m)	5	0		
Molybdenum	ppm	ASTM D5185(m)	5	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	25	7		
Calcium	ppm	ASTM D5185(m)	200	140		
Phosphorus	ppm	ASTM D5185(m)	300	304		
Zinc						
	ppm	ASTM D5185(m)	370	378		
Sulfur	ppm	ASTM D5185(m) ASTM D5185(m)	370 2500	378 683		
-		,				
Sulfur	ppm	ASTM D5185(m)		683	 history1	 history2
Sulfur Lithium	ppm	ASTM D5185(m) ASTM D5185(m)	2500	683 <1		
Sulfur Lithium CONTAMINANTS Silicon	ppm ppm	ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m)	2500 limit/base	683 <1 current	history1	history2
Sulfur Lithium CONTAMINANTS	ppm	ASTM D5185(m) ASTM D5185(m) method	2500 limit/base	683 <1 current	history1	history2
Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)	2500 limit/base >15	683 <1 current 0 <1	history1	history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2500 limit/base >15 >20	683 <1 current 0 <1 0	 history1 	 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method	2500 limit/base >15 >20 limit/base	683 <1 current 0 <1 0 current	history1	history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647	2500 limit/base >15 >20 limit/base >5000	683 <1 current 0 <1 0 current 120	history1 history1 history1	history2 history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647 ASTM D7647	2500 limit/base >15 >20 limit/base >5000 >1300	683 <1 current 0 <1 0 current 120 49	history1 history1 history1	history2 history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method ASTM D7647 ASTM D7647 ASTM D7647	2500 limit/base >15 >20 limit/base >5000 >1300 >160	683 <1 current 0 <1 0 current 120 49 4	history1 history1 history1	history2 history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm	ASTM D5185(m) Method ASTM D5185(m) Method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	2500 limit/base >15 >20 limit/base >5000 >1300 >160 >40	683 <1 current 0 <1 0 current 120 49 4 1	history1 history1	history2 history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	2500 limit/base >15 >20 limit/base >5000 >1300 >160 >40 >10	683 <1 current 0 <1 0 current 120 49 4 1 0	history1 history1 history1	history2 history2 history2

Contact/Location: Kevin Bindner - SIETIL



OIL ANALYSIS REPORT

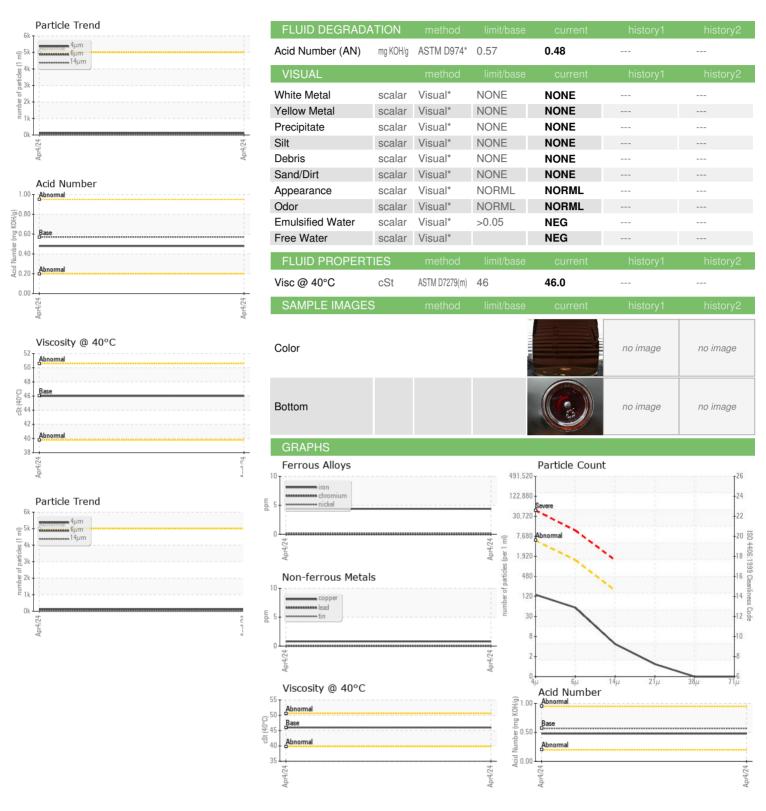



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number : 02628196 Unique Number : 5761328 Test Package : IND 2

: WC0839620

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 11 Apr 2024 Tested : 12 Apr 2024

Diagnosed : 12 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

MAHLE FILTER SYSTEMS CANADA 16 INDUSTRIAL PARK ROAD

TILBURY, ON CA NOP 2L0 Contact: Kevin Bindner

kevin.bindner@ca.mahle.com T: (519)682-0444

F: (519)682-5054