

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id 1000004801

Hydraulic System

AW HYDRAULIC OIL ISO 68 (2700 LTR)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			,	Apr2024		
	—					
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0905459		
Sample Date		Client Info		04 Apr 2024		
Machine Age		Client Info		0		
Oil Age		Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATION	1	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	2		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	3		
Barium	ppm	ASTM D5185(m)	5	0		
Molybdenum	ppm	ASTM D5185(m)	5	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	25	7		
Calcium	ppm	ASTM D5185(m)	200	142		
Phosphorus	ppm	ASTM D5185(m)	300	319		
Zinc	ppm	ASTM D5185(m)	370	407		
Sulfur	ppm	ASTM D5185(m)	2500	722		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
CONTAMINANTS Silicon	ppm	method ASTM D5185(m)	limit/base >15	current 0	history1	history2
					,	
Silicon	ppm	ASTM D5185(m)		0		
Silicon Sodium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	>15	0 <1		
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	>15 >20	0 <1 0		
Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method	>15 >20 limit/base	0 <1 0	 history1	 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647	>15 >20 limit/base >5000	0 <1 0 current	history1	history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647 ASTM D7647	>15 >20 limit/base >5000 >1300 >160	0 <1 0 current 3781 862	 history1	 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >5000 >1300 >160	0 <1 0 current 3781 862 64	 history1	 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >5000 >1300 >160 >40	0 <1 0 current 3781 862 64 17	history1	 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >5000 >1300 >160 >40 >10	0 <1 0 current 3781 862 64 17 0	history1	 history2



OIL ANALYSIS REPORT

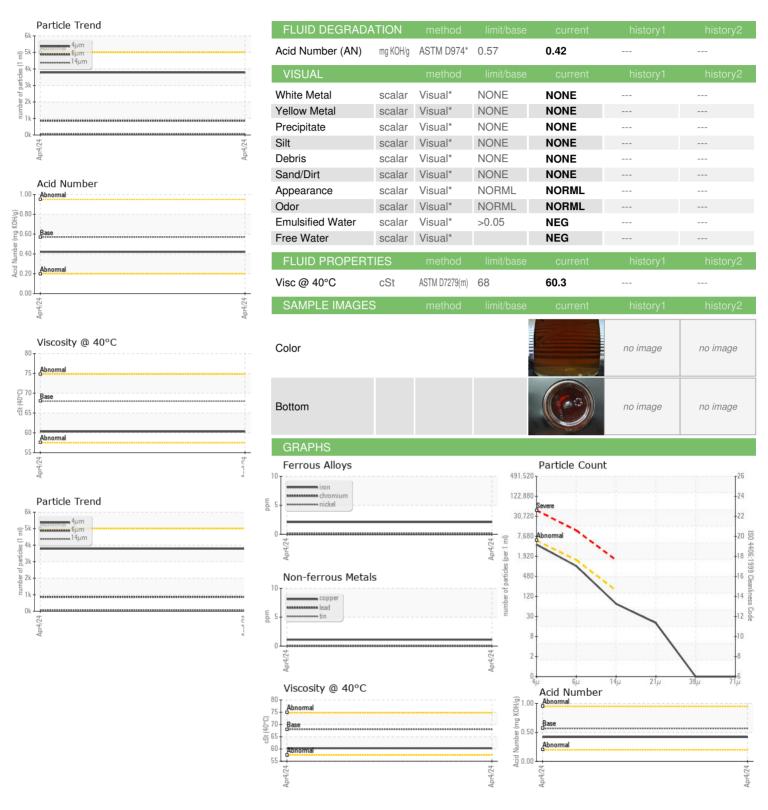



CALA ISO 17025:2017 Accredited Laboratory

Report Id: SIETIL [WCAMIS] 02628208 (Generated: 04/22/2024 14:14:55) Rev: 1

Laboratory Sample No.

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Lab Number : 02628208

: WC0905459 Unique Number : 5761340 Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Received **Tested** Diagnosed

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

: 11 Apr 2024 : 12 Apr 2024

: 12 Apr 2024 - Wes Davis

MAHLE FILTER SYSTEMS CANADA 16 INDUSTRIAL PARK ROAD TILBURY, ON CA NOP 2L0

Contact: Kevin Bindner kevin.bindner@ca.mahle.com T: (519)682-0444

F: (519)682-5054

Validity of results and interpretation are based on the sample and information as supplied.

Contact/Location: Kevin Bindner - SIETIL