




OIL ANALYSIS REPORT

Sample Rating Trend

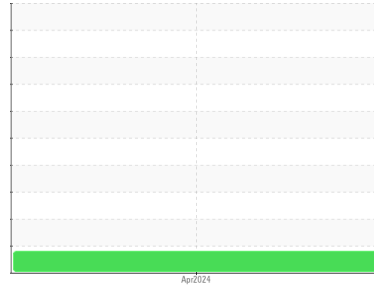

FUEL



Machine Id
HINO 367302
 Component
Diesel Engine
 Fluid
SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0889872	---	---
Sample Date	Client Info		03 Apr 2024	---	---
Machine Age	kms	Client Info	0	---	---
Oil Age	kms	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			MARGINAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	50	---	---
Chromium	ppm	ASTM D5185(m) >20	1	---	---
Nickel	ppm	ASTM D5185(m) >4	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >3	0	---	---
Aluminum	ppm	ASTM D5185(m) >20	9	---	---
Lead	ppm	ASTM D5185(m) >40	6	---	---
Copper	ppm	ASTM D5185(m) >330	3	---	---
Tin	ppm	ASTM D5185(m) >15	<1	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	22	---	---
Barium	ppm	ASTM D5185(m)	0	---	---
Molybdenum	ppm	ASTM D5185(m)	98	---	---
Manganese	ppm	ASTM D5185(m)	<1	---	---
Magnesium	ppm	ASTM D5185(m)	17	---	---
Calcium	ppm	ASTM D5185(m)	2409	---	---
Phosphorus	ppm	ASTM D5185(m)	899	---	---
Zinc	ppm	ASTM D5185(m)	1118	---	---
Sulfur	ppm	ASTM D5185(m)	3105	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	5	---	---
Sodium	ppm	ASTM D5185(m) >57	4	---	---
Potassium	ppm	ASTM D5185(m) >20	4	---	---
Fuel	%	ASTM D7593* >5	▲ 2.5	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	1	---	---
Nitration	Abs/cm	ASTM D7624* >20	17.7	---	---
Sulfation	Abs/.1mm	ASTM D7415* >30	33.7	---	---



OIL ANALYSIS REPORT

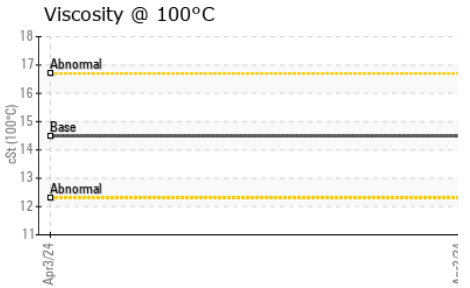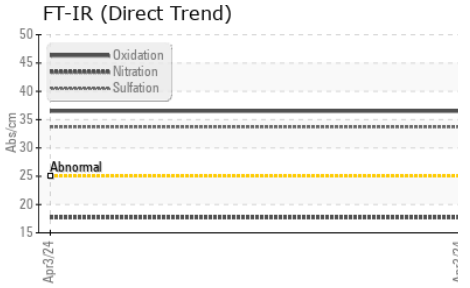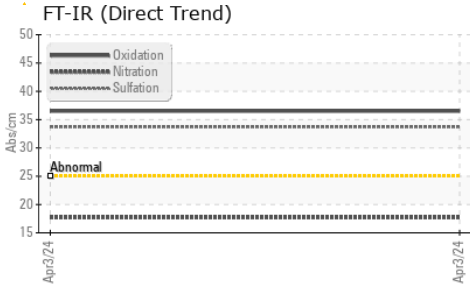

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	36.5	---	---









VISUAL

method	limit/base	current	history1	history2	
Emulsified Water	scalar Visual*	>0.2	NEG	---	---
Free Water	scalar Visual*		NEG	---	---

FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D7279(m)	14.5	---	---

GRAPHS

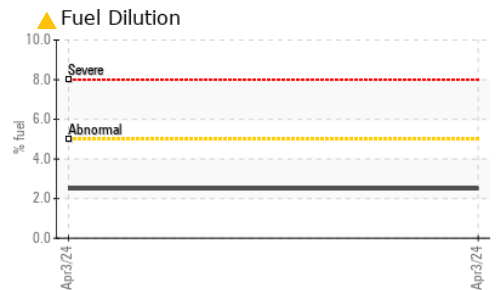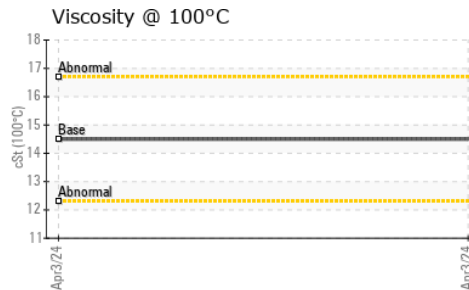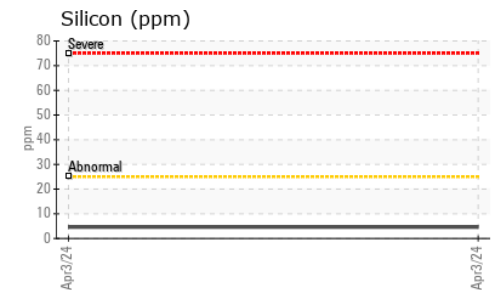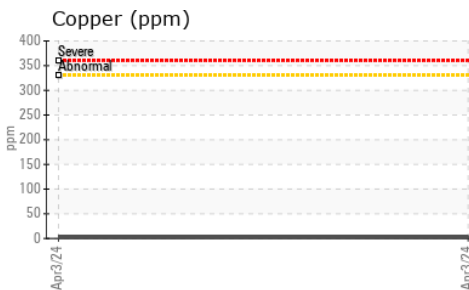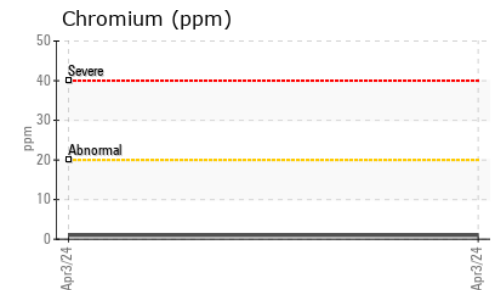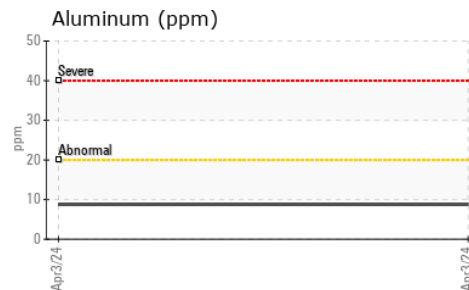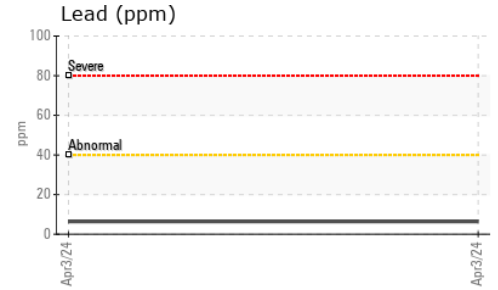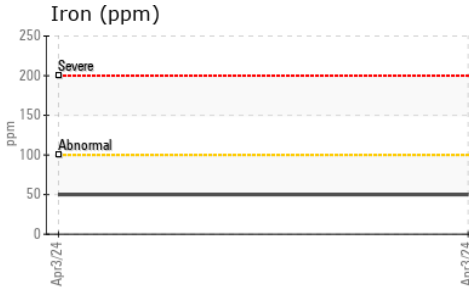

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0889872 **Received** : 12 Apr 2024
Lab Number : 02628433 **Tested** : 16 Apr 2024
Unique Number : 5761565 **Diagnosed** : 16 Apr 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: FUELDILUTION, PercentFuel)

BRITANNIA FLEET SERVICES
 1831 SHAWSON DRIVE (SHOP)
 MISSISSAUGA, ON
 CA L4W 1T9
 Contact: Tania Henriques
 tania.henriques@britanniafleet.ca
 T: (905)670-4545
 F: (905)670-9036

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.