

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area [156361] FPEC BLENDER 2-1 Component Gearbox

PETRO CANADA 220 (4 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Fluid

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0929898	WC0789515	
Sample Date		Client Info		10 Apr 2024	11 Mar 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	SEVERE	
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	3 02	
Iron	ppm	ASTM D5185(m)	>200	3	1 268	
Chromium	ppm	ASTM D5185(m)	>10	0	1 7	
Nickel	ppm	ASTM D5185(m)	>10	0	1	
Titanium	ppm	ASTM D5185(m)		0	<1	
Silver	ppm	ASTM D5185(m)		0	0	
Aluminum	ppm	ASTM D5185(m)	>25	0	4	
Lead	ppm	ASTM D5185(m)	>50	0	24	
Copper	ppm	ASTM D5185(m)	>200	<1	A 353	
Tin	ppm	ASTM D5185(m)	>10	0	4	
Antimony	ppm	ASTM D5185(m)	>5	0	1	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		21	5	
Barium	ppm	ASTM D5185(m)		<1	0	
Molybdenum	ppm	ASTM D5185(m)		0	0	
Manganese	ppm	ASTM D5185(m)		0	5	
Magnesium	ppm	ASTM D5185(m)		1	0	
Calcium	ppm	ASTM D5185(m)		3	8	
Phosphorus	ppm	ASTM D5185(m)		294	341	
Zinc	ppm	ASTM D5185(m)		4	215	
Sulfur	ppm	ASTM D5185(m)		11938	5723	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	0	7	
Sodium	ppm	ASTM D5185(m)		<1	5	
Potassium	ppm	ASTM D5185(m)	>20	<1	4	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.65	0.33	



OIL ANALYSIS REPORT

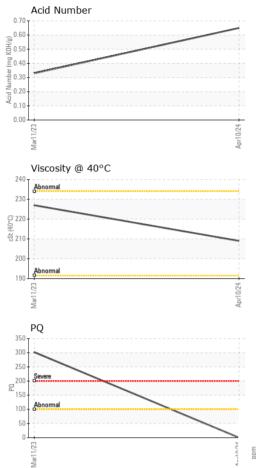

	VISUAL		method	limit/base	current	history1	history
	White Metal	scalar	Visual*	NONE	NONE	NONE	
	Yellow Metal	scalar	Visual*	NONE	NONE	NONE	
	Precipitate	scalar	Visual*	NONE	NONE	NONE	
	Silt	scalar	Visual*	NONE	NONE	VLITE	
	Debris		Visual*	NONE	NONE	NONE	
		scalar			_		
24 +	Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	
Apr10/24	Appearance	scalar	Visual*	NORML	NORML	WGOIL	
A	Odor	scalar	Visual*	NORML	NORML	NORML	
	Emulsified Water	scalar	Visual*	>0.2	NEG	▲ 1%	
	Free Water	scalar	Visual*		NEG	▲ 5%	
	FLUID PROPER	RTIES	method	limit/base	current	history1	history
	Visc @ 40°C	cSt	ASTM D7279(m)		209	227	
	SAMPLE IMAGI	ES	method	limit/base	current	history1	history
Apr1 0/24	Color						no image
	Bottom					and the second s	no image
A	Non-ferrous Met	als		244 220 4200104 4216 144 144 100 8 6 6 44 4 20 100 144 20 100 144 20 100 144 144 100 100 144 144 100 144 144	0 - Severe 0		
	Mar11/2			Apr1	Mar11/23		
	Viscosity @ 40°C				Acid Number	r	
	230 Abnormal			(0,8) (0,H0) (0,H0) (0,H0) (0,	U T		
	the second se			및 0.6 말	0-		
	220 00 220 20 20			b 0.4	0		
	200-			N 0.2	0 -		
	Abnormal				oL		
	Mar11/23			Apr10/24	Mar11/23		
oratory	≥ : WearCheck - C8-11 : WC0929898					GRAND F 190 VON	RIVER FOO

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Report Id: GRA685CAM [WCAMIS] 02628599 (Generated: 04/15/2024 10:09:24) Rev: 1

CALA

ISO 17025:2017 Accredited Laboratory

Contact/Location: Ryan Shea - GRA685CAM

F:

T: (519)653-3577