




OIL ANALYSIS REPORT

Sample Rating Trend

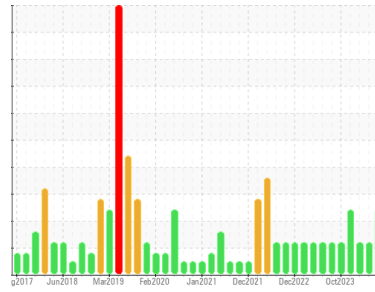

FUEL



Machine Id
2008 NOVA 156
 Component
Rear Diesel Engine
 Fluid
ESSO XD-3 EXTRA 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0888999	WC0889113	WC0889105
Sample Date	Client Info			08 Apr 2024	20 Feb 2024	29 Dec 2023
Machine Age	kms	Client Info		0	0	0
Oil Age	kms	Client Info		9280	9513	1408
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				SEVERE	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	0.0

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>75	35	34	10
Chromium	ppm	ASTM D5185(m)	>5	1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	5	5	2
Lead	ppm	ASTM D5185(m)	>25	0	<1	0
Copper	ppm	ASTM D5185(m)	>100	1	1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		85	83	137
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	1	1
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)		16	21	20
Calcium	ppm	ASTM D5185(m)	3780	2115	2127	2083
Phosphorus	ppm	ASTM D5185(m)	1370	894	902	935
Zinc	ppm	ASTM D5185(m)	1500	1094	1059	1074
Sulfur	ppm	ASTM D5185(m)	3800	2659	2902	3058
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4	4	3
Sodium	ppm	ASTM D5185(m)	>192	3	4	2
Potassium	ppm	ASTM D5185(m)	>20	7	7	11
Fuel	%	ASTM D7593*	>3.0	▲ 8	▲ 5.5	▲ 3.4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.9	0.7	0.1
Nitration	Abs/cm	ASTM D7624*	>20	10.7	10.7	6.8
Sulfation	Abs/1mm	ASTM D7415*	>30	25.1	24.1	21.3











OIL ANALYSIS REPORT

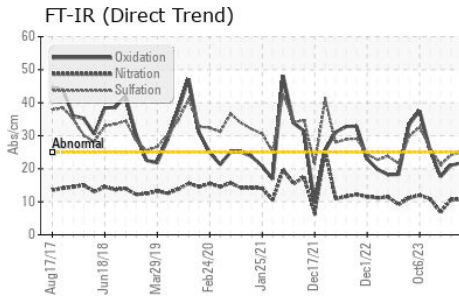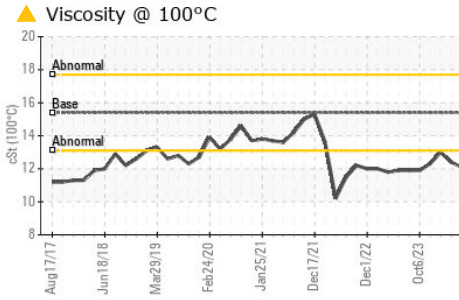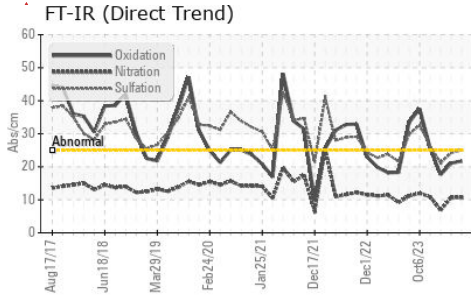

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	21.7	21.1	17.6
VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 12.1	▲ 12.4	▲ 13.0

GRAPHS

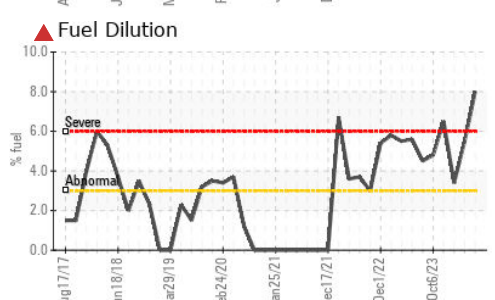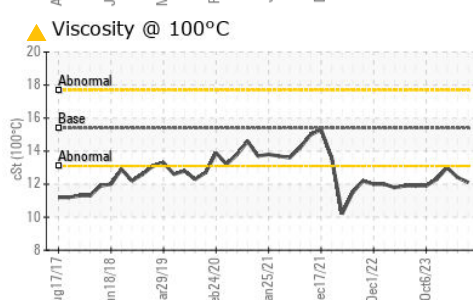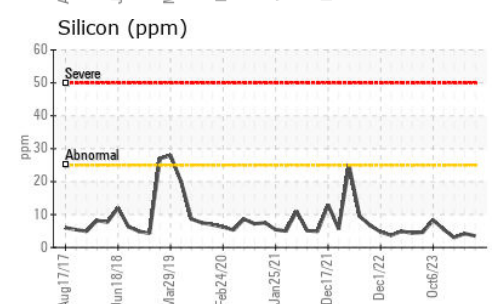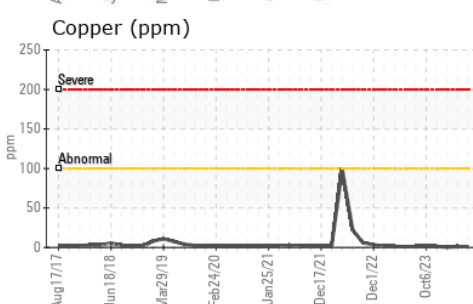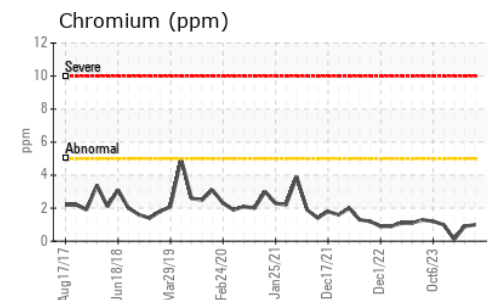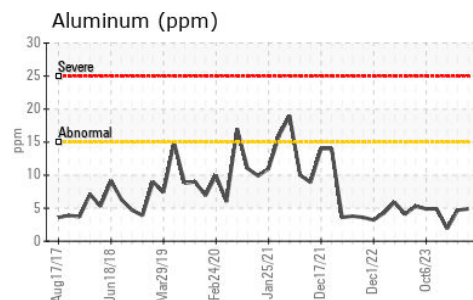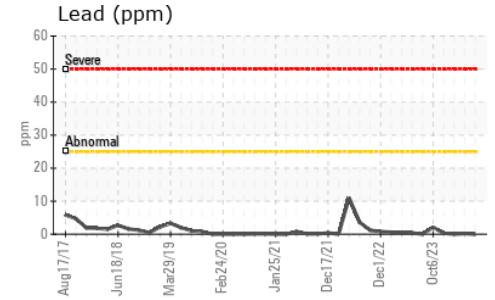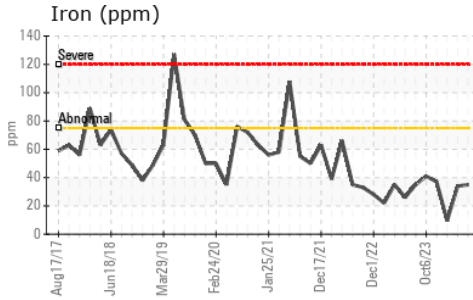

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0888999 **Received** : 15 Apr 2024
Lab Number : **02628773** **Tested** : 16 Apr 2024
Unique Number : 5761905 **Diagnosed** : 16 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)

CITY OF THUNDER BAY
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD
 THUNDER BAY, ON
 CA P7B 2Z8
 Contact: Sean Malcolm
 sean.malcolm@thunderbay.ca
 T: (807)684-2716
 F: (807)344-0237

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.