




# OIL ANALYSIS REPORT

## Sample Rating Trend

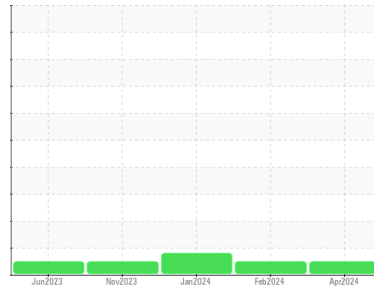

**NORMAL**



Machine Id  
**241**  
 Component  
**Transmission (Auto)**  
 Fluid  
**CASTROL TRANSYND (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the fluid.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0888998</b>	WC0889082	WC0889110
Sample Date	Client Info		<b>09 Apr 2024</b>	28 Feb 2024	08 Jan 2024
Machine Age	kms	Client Info	<b>0</b>	0	0
Oil Age	kms	Client Info	<b>48060</b>	9134	29760
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>230	<b>113</b>	97	86
Chromium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>65	<b>22</b>	18	15
Lead	ppm	ASTM D5185(m)	>55	<b>4</b>	3	3
Copper	ppm	ASTM D5185(m)	>85	<b>16</b>	14	13
Tin	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	1	1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	150	<b>45</b>	45	44
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>2</b>	1	1
Magnesium	ppm	ASTM D5185(m)	0	<b>1</b>	<1	1
Calcium	ppm	ASTM D5185(m)	40	<b>117</b>	116	116
Phosphorus	ppm	ASTM D5185(m)	320	<b>201</b>	205	203
Zinc	ppm	ASTM D5185(m)	5	<b>7</b>	6	6
Sulfur	ppm	ASTM D5185(m)	1050	<b>1437</b>	1548	1552
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

### CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	<b>6</b>	6	5
Sodium	ppm	ASTM D5185(m)		<b>4</b>	4	4
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	3	2

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	1.0	<b>0.99</b>	1.04	0.83




# OIL ANALYSIS REPORT

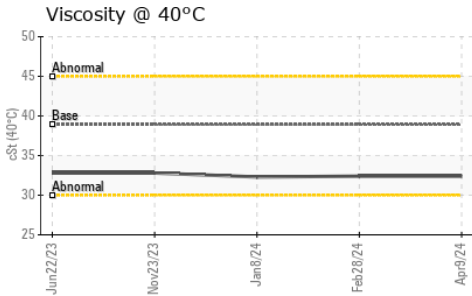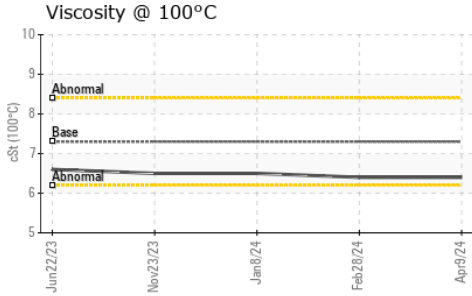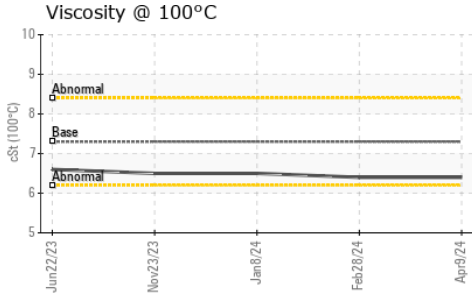









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	<b>32.4</b>	32.4	32.3
Visc @ 100°C	cSt	ASTM D7279(m)	7.3	<b>6.4</b>	6.4	6.5
Viscosity Index (VI)	Scale	ASTM D2270*	168	<b>153</b>	153	160

### SAMPLE IMAGES

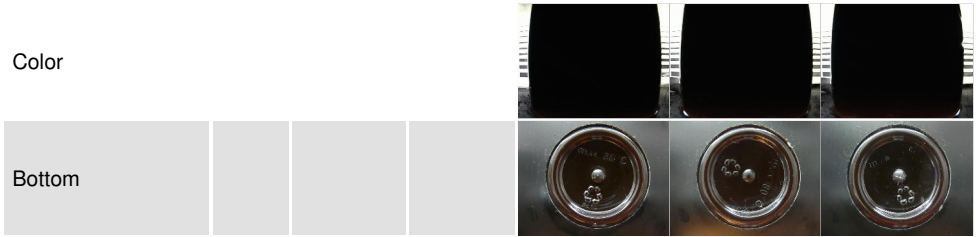

### GRAPHS

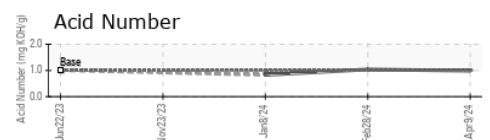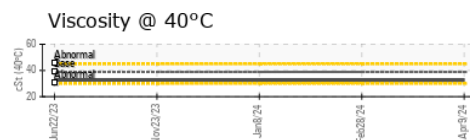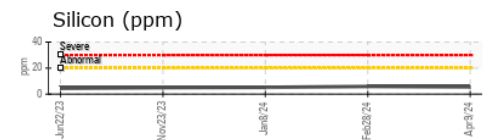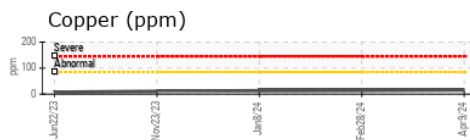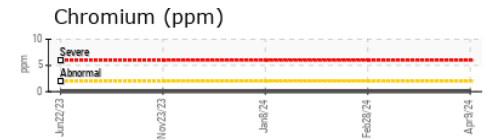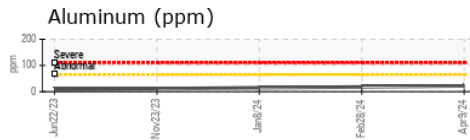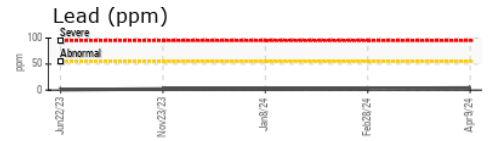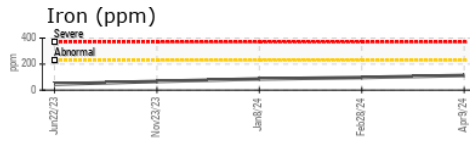

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0888998 **Received** : 15 Apr 2024  
**Lab Number** : **02628930** **Tested** : 16 Apr 2024  
**Unique Number** : 5762062 **Diagnosed** : 16 Apr 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV100, TAN Man, VI )

**CITY OF THUNDER BAY**  
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD  
 THUNDER BAY, ON  
 CA P7B 2Z8  
 Contact: Sean Malcolm  
 sean.malcolm@thunderbay.ca  
 T: (807)684-2716  
 F: (807)344-0237

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.