



# OIL ANALYSIS REPORT

Sample Rating Trend



FUEL



Machine Id

## HONDA NO UNIT WC0837983

Component

Gasoline Engine

Fluid

SAE 0W20 (--- LTR)

### DIAGNOSIS

#### ▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

Light fuel dilution occurring.

#### ▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0837983	---	---
Sample Date	Client Info		10 Apr 2024	---	---
Machine Age	kms	Client Info	226700	---	---
Oil Age	kms	Client Info	8200	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>150	3	---
Chromium	ppm	ASTM D5185(m)	>20	0	---
Nickel	ppm	ASTM D5185(m)	>5	0	---
Titanium	ppm	ASTM D5185(m)		0	---
Silver	ppm	ASTM D5185(m)	>2	0	---
Aluminum	ppm	ASTM D5185(m)	>40	5	---
Lead	ppm	ASTM D5185(m)	>50	0	---
Copper	ppm	ASTM D5185(m)	>155	<1	---
Tin	ppm	ASTM D5185(m)	>10	0	---
Antimony	ppm	ASTM D5185(m)		0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		133	---
Barium	ppm	ASTM D5185(m)		0	---
Molybdenum	ppm	ASTM D5185(m)		71	---
Manganese	ppm	ASTM D5185(m)		<1	---
Magnesium	ppm	ASTM D5185(m)		512	---
Calcium	ppm	ASTM D5185(m)		1221	---
Phosphorus	ppm	ASTM D5185(m)		663	---
Zinc	ppm	ASTM D5185(m)		739	---
Sulfur	ppm	ASTM D5185(m)		2546	---
Lithium	ppm	ASTM D5185(m)		<1	---

### CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	10	---
Sodium	ppm	ASTM D5185(m)	>400	2	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---
Fuel	%	ASTM D7593*	>4.0	▲ 3.2	---

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		0	---
Nitration	Abs/cm	ASTM D7624*	>20	8.6	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.3	---



# OIL ANALYSIS REPORT










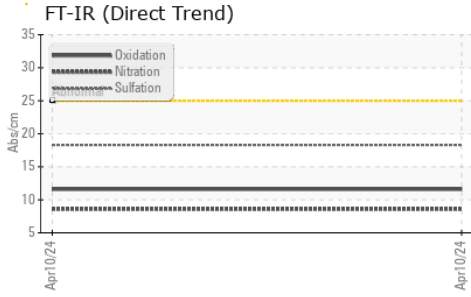


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>11.6</b>	---	---

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	8.3	<b>▲ 7.0</b>	---	---

## GRAPHS

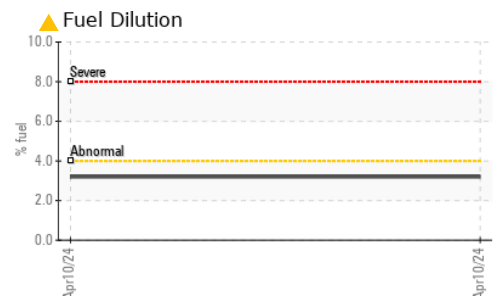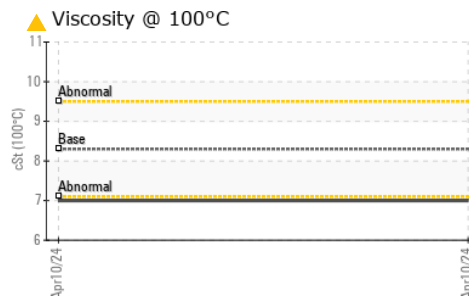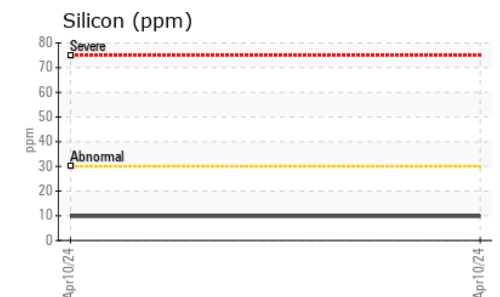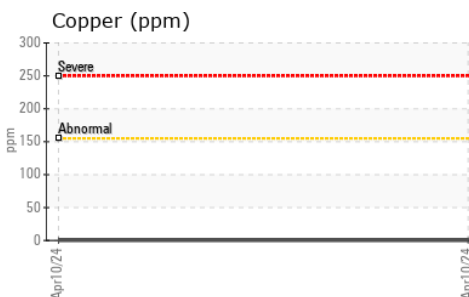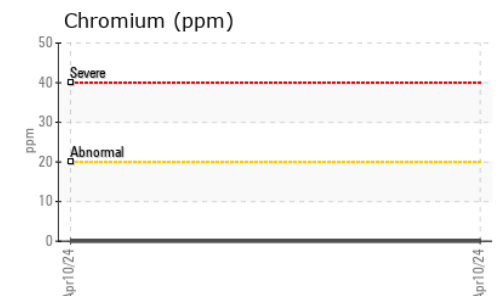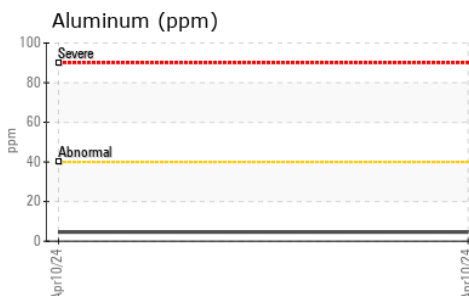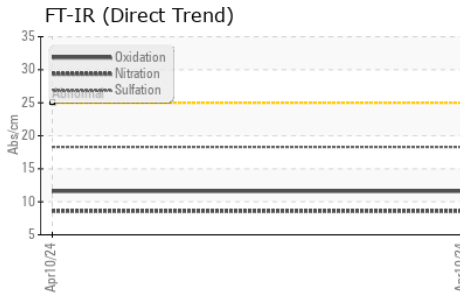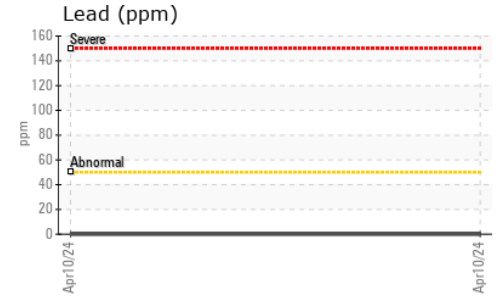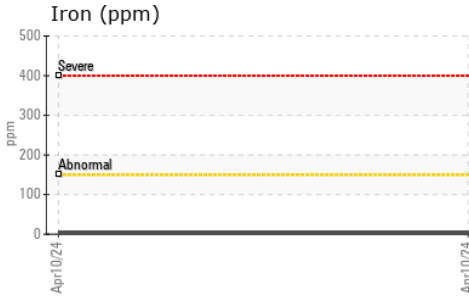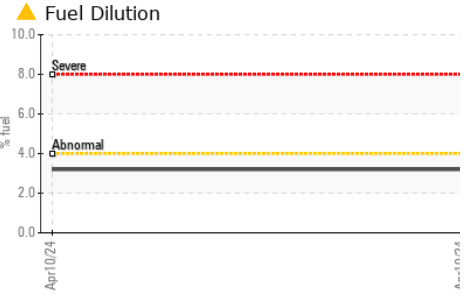

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0837983 **Received** : 16 Apr 2024  
**Lab Number** : **02629157** **Tested** : 18 Apr 2024  
**Unique Number** : 5762289 **Diagnosed** : 18 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**BILL SALTON**  
 16 MARVIN DR.  
 ST. CATHARINES, ON  
 CA L2M 1X7  
 Contact: Bill Salton  
 billsalton@icloud.com  
 T: (905)931-8724  
 F: