




# OIL ANALYSIS REPORT

## Sample Rating Trend

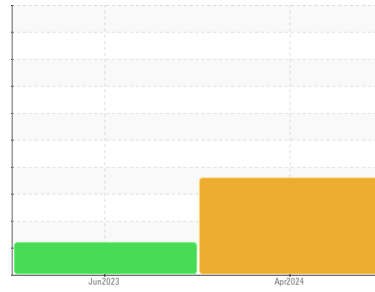

GLYCOL



Area  
**ORIN CONTRACTORS**

Machine Id

**191**

Component

**Diesel Engine**

Fluid

**PETRO CANADA 10W30 (--- GAL)**

### DIAGNOSIS

#### ▲ Recommendation

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

Test for glycol is positive. There is a light concentration of glycol present in the oil.

#### Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0920875</b>	LH0265859	---
Sample Date	Client Info		<b>06 Apr 2024</b>	24 Jun 2023	---
Machine Age	hrs	Client Info	<b>0</b>	9967	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	Changed	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	▲ 3.3	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	<b>13</b>	11	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	2	---
Lead	ppm	ASTM D5185(m)	>40	<b>7</b>	7	---
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	1	---
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>2</b>	23	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)		<b>63</b>	57	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185(m)		<b>982</b>	393	---
Calcium	ppm	ASTM D5185(m)		<b>1206</b>	1788	---
Phosphorus	ppm	ASTM D5185(m)		<b>1041</b>	1035	---
Zinc	ppm	ASTM D5185(m)		<b>1224</b>	1176	---
Sulfur	ppm	ASTM D5185(m)		<b>2147</b>	2532	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

### CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	5	---
Sodium	ppm	ASTM D5185(m)		<b>9</b>	7	---
Potassium	ppm	ASTM D5185(m)	>20	▲ <b>106</b>	74	---
Glycol	%	ASTM D7922*		▲ <b>0.02</b>	0.0	---

### INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.2	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.7</b>	9.2	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>24.1</b>	23.3	---



# OIL ANALYSIS REPORT






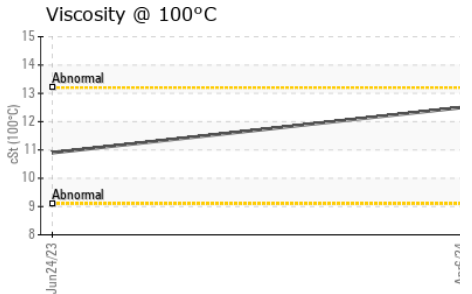
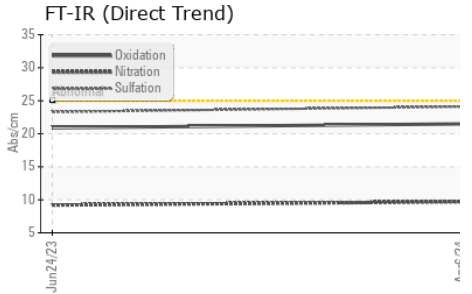
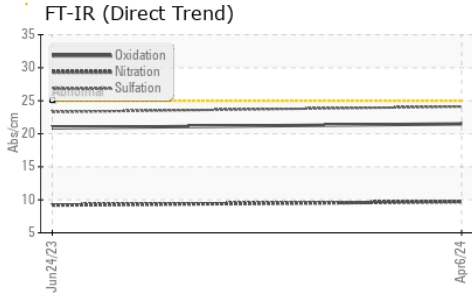


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>21.5</b>	20.9	---

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	<b>12.5</b>	▲ 10.9	---

## GRAPHS

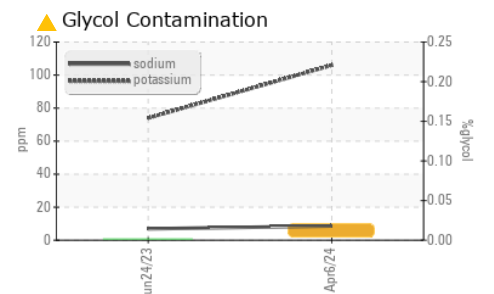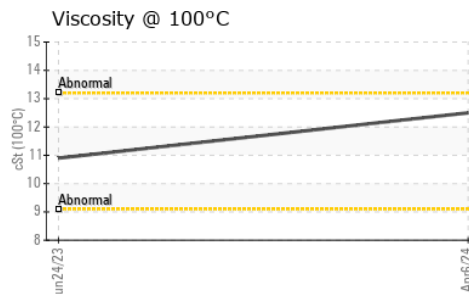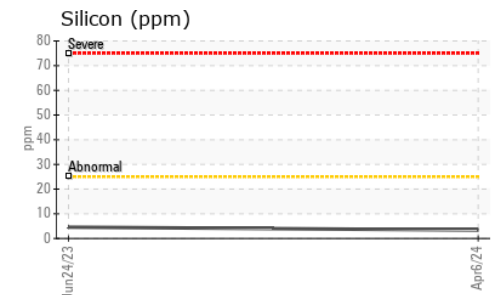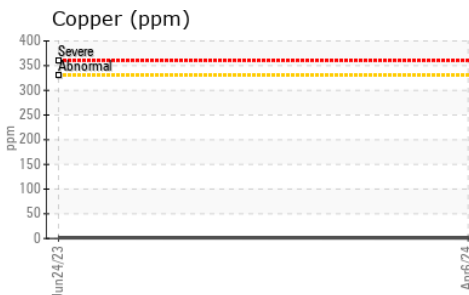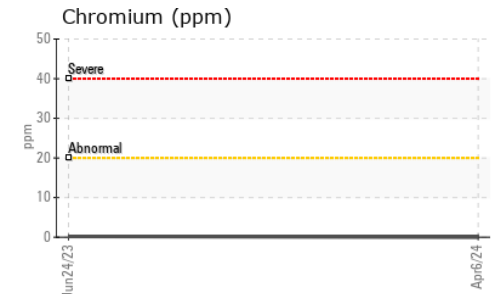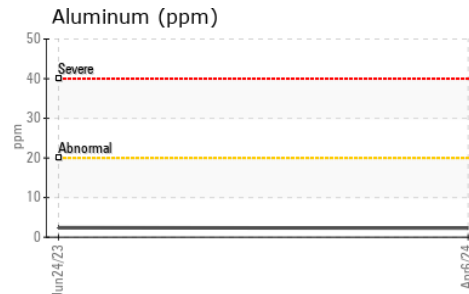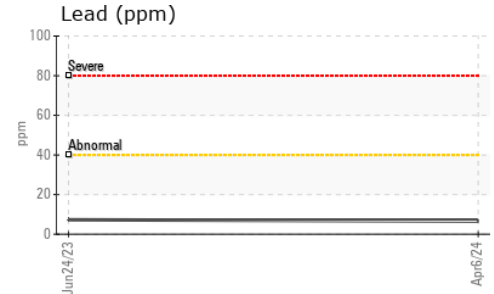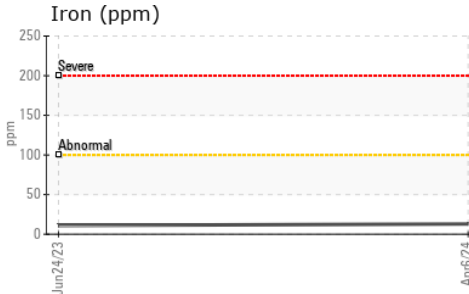

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0920875      **Received** : 16 Apr 2024  
**Lab Number** : **02629170**      **Tested** : 17 Apr 2024  
**Unique Number** : 5762302      **Diagnosed** : 17 Apr 2024 - Kevin Marson  
**Test Package** : MOBCE ( Additional Tests: Glycol )

**RONI/IRON SHORE EXCAVATING LTD.**  
 100 MACINTOSH BLVD  
 VAUGHAN, ON  
 CA L4K 4P3  
 Contact: Service Team  
 service.team@roni.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.