


OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id
239562
Component
Hydraulic System
Fluid
JCB AW 32 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component(unconfirmed).


Fluid Condition


Viscosity of sample indicates oil is within ISO 46 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PP0001064		
Sample Date		Client Info		14 Mar 2024		
Machine Age	hrs	Client Info		679		
Oil Age	hrs	Client Info		679		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
CONTAMINATION	٧	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	13		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	<1		
Lead	ppm	ASTM D5185(m)	>10	<1		
Copper	ppm	ASTM D5185(m)	>75	5		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		3		
Barium	ppm	ASTM D5185(m)		1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		63		
Calcium	ppm	ASTM D5185(m)		167		
Phosphorus	ppm	ASTM D5185(m)		355		
Zinc	ppm	ASTM D5185(m)		424		
Sulfur	ppm	ASTM D5185(m)		1122		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	2		
Sodium	ppm	ASTM D5185(m)		5		
Potassium	ppm	ASTM D5185(m)	>20	1		



OIL ANALYSIS REPORT

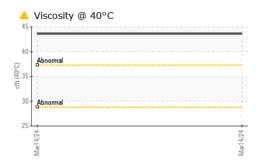

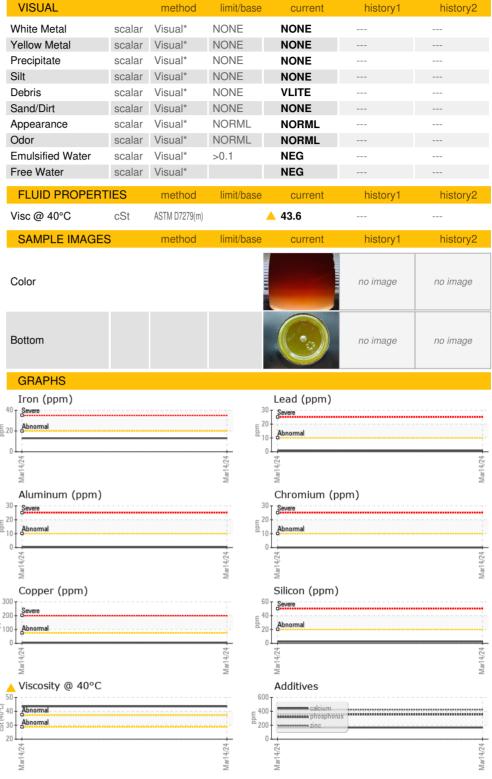



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number : 02629252 Unique Number : 5762384

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : PP0001064 Received

Tested Diagnosed Test Package : MOB 1

: 16 Apr 2024 : 17 Apr 2024 : 17 Apr 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Morholme Industrial 13399 Torbram

Caledon, ON CA L7C 2C6 Contact: Kyle Morrison kyle.morrison@morholme.ca

T: (647)564-9715

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied. Contact/Location: Kyle Morrison - MOR133CAL