




# OIL ANALYSIS REPORT

Area  
**RONI**  
 Machine Id  
**454**  
 Component  
**Transmission (Manual)**  
 Fluid  
**TDH FLUID SAE 75W80 (--- GAL)**

## Sample Rating Trend

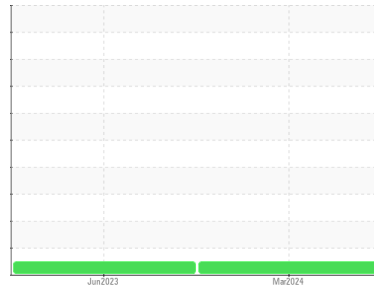

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the fluid.

#### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0920840</b>	LH0256756	---
Sample Date	Client Info			<b>21 Mar 2024</b>	24 Jun 2023	---
Machine Age	hrs	Client Info		<b>0</b>	1968	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>Not Chngd</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	<b>14</b>	13	---
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>7	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>2</b>	3	---
Lead	ppm	ASTM D5185(m)	>45	<b>0</b>	<1	---
Copper	ppm	ASTM D5185(m)	>225	<b>5</b>	9	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	10	<b>129</b>	102	---
Barium	ppm	ASTM D5185(m)	10	<b>2</b>	4	---
Molybdenum	ppm	ASTM D5185(m)	10	<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185(m)	100	<b>13</b>	11	---
Calcium	ppm	ASTM D5185(m)	3500	<b>3641</b>	3583	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1026</b>	1209	---
Zinc	ppm	ASTM D5185(m)	1150	<b>651</b>	1439	---
Sulfur	ppm	ASTM D5185(m)	3000	<b>3239</b>	3431	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>125	<b>7</b>	12	---
Sodium	ppm	ASTM D5185(m)		<b>6</b>	11	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	2	---




# OIL ANALYSIS REPORT

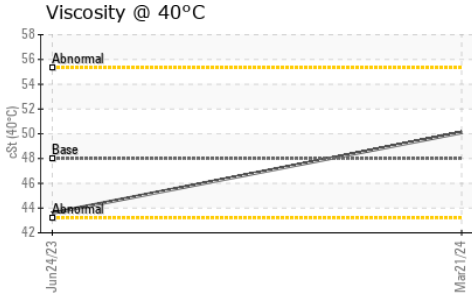









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	48	<b>50.1</b>	43.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

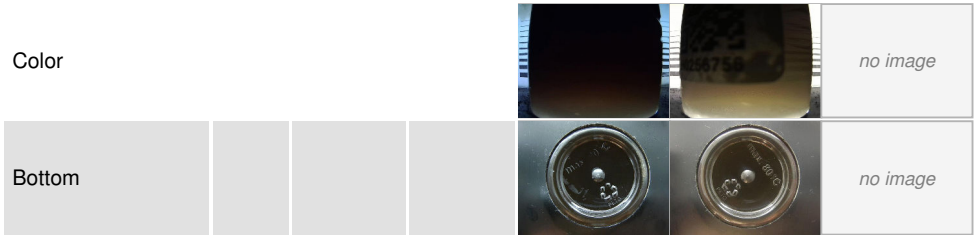

## GRAPHS

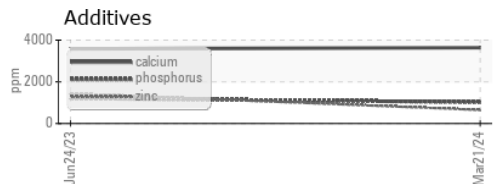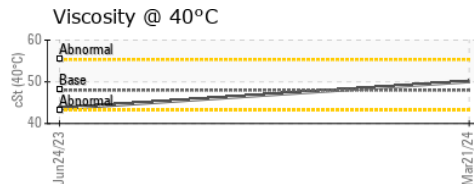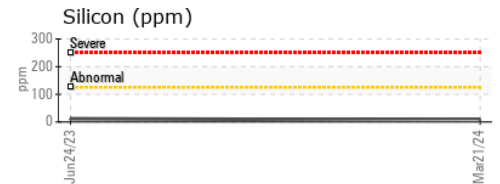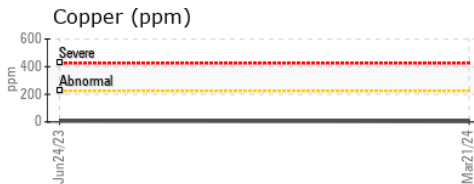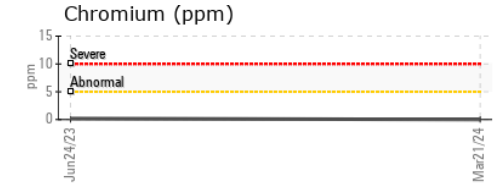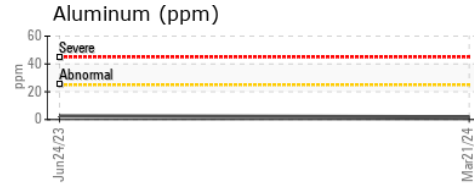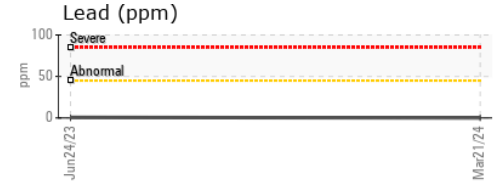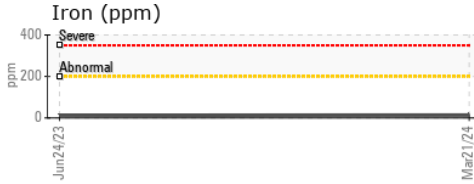

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0920840  
**Lab Number** : 02629255  
**Unique Number** : 5762387  
**Test Package** : MOBCE ( Additional Tests: Visual )

**RONI/IRON SHORE EXCAVATING LTD.**  
 100 MACINTOSH BLVD  
 VAUGHAN, ON  
 CA L4K 4P3  
 Contact: Service Team  
 service.team@roni.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.