




# OIL ANALYSIS REPORT

Sample Rating Trend

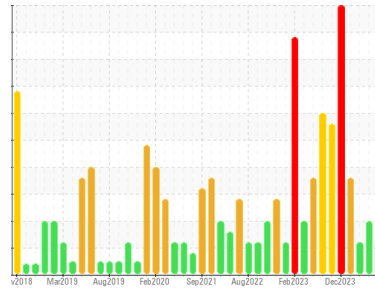

ISO



Area  
**BOF/OG SYSTEM**  
 Machine Id  
**D - O.G. Fan Lube System # 8**  
 Component  
**Lube System**  
 Fluid  
**PETRO CANADA HYDREX AW 100 (135 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0934084</b>	WC0926484	WC0910450
Sample Date	Client Info	<b>15 Apr 2024</b>	22 Mar 2024	16 Feb 2024
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184* >99999	<b>0</b>	0	0
Iron	ppm ASTM D5185(m) >20	<b>3</b>	1	1
Chromium	ppm ASTM D5185(m) >20	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m) >20	<b>0</b>	0	0
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm ASTM D5185(m) >20	<b>0</b>	0	<1
Lead	ppm ASTM D5185(m) >20	<b>0</b>	0	<1
Copper	ppm ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185(m) >20	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES






method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	<b>&lt;1</b>	0	0
Barium	ppm ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m) 0	<b>0</b>	0	0
Magnesium	ppm ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Calcium	ppm ASTM D5185(m) 50	<b>46</b>	48	49
Phosphorus	ppm ASTM D5185(m) 330	<b>327</b>	324	340
Zinc	ppm ASTM D5185(m) 430	<b>418</b>	423	425
Sulfur	ppm ASTM D5185(m) 760	<b>2808</b>	2574	2935
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	<b>3</b>	2	4
Sodium	ppm ASTM D5185(m)	<b>0</b>	0	0
Potassium	ppm ASTM D5185(m) >20	<b>0</b>	0	<1



# OIL ANALYSIS REPORT

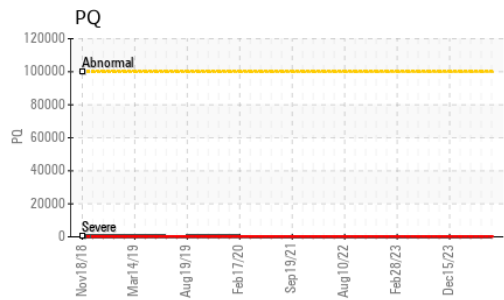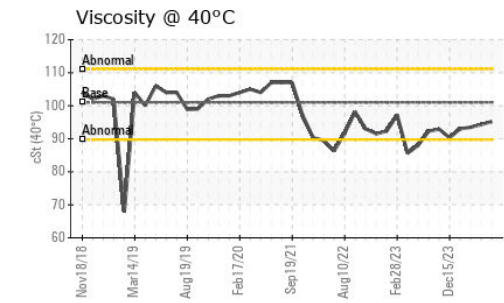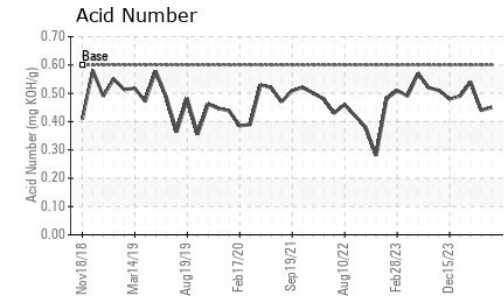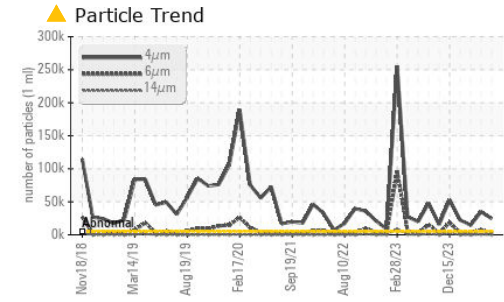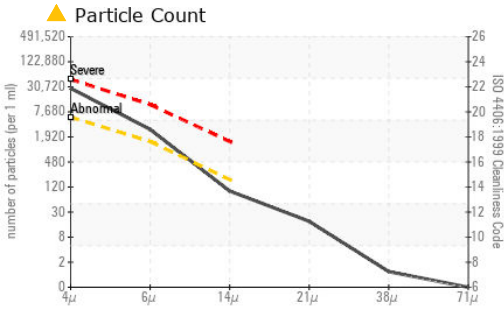

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0934084  
**Lab Number** : 02629319  
**Unique Number** : 5762451  
**Test Package** : IND 2 ( Additional Tests: PQ, TAN Man )

**Received** : 16 Apr 2024  
**Tested** : 17 Apr 2024  
**Diagnosed** : 17 Apr 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 24541	▲ 34936	▲ 14564
Particles >6µm	ASTM D7647	>1300	▲ 2541	▲ 7678	● 1777
Particles >14µm	ASTM D7647	>160	85	▲ 683	123
Particles >21µm	ASTM D7647	>40	16	▲ 181	36
Particles >38µm	ASTM D7647	>10	1	8	5
Particles >71µm	ASTM D7647	>3	0	1	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/19/14	▲ 22/20/17	▲ 21/18/14

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.60	0.45	0.44	0.54

VISUAL	method	limit/base	current	history1	history2																																			
White Metal	scalar	Visual*	NONE	NONE	NONE																																			
Yellow Metal	scalar	Visual*	NONE	NONE	NONE																																			
Precipitate	scalar	Visual*	NONE	NONE	NONE																																			
Silt	scalar	Visual*	NONE	NONE </tr <tr> <td>Debris</td> <td>scalar</td> <td>Visual*</td> <td>NONE</td> <td>NONE</td> <td>NONE</td> </tr> <tr> <td>Sand/Dirt</td> <td>scalar</td> <td>Visual*</td> <td>NONE</td> <td>NONE</td> <td>NONE</td> </tr> <tr> <td>Appearance</td> <td>scalar</td> <td>Visual*</td> <td>NORML</td> <td>NORML</td> <td>NORML</td> </tr> <tr> <td>Odor</td> <td>scalar</td> <td>Visual*</td> <td>NORML</td> <td>NORML</td> <td>NORML</td> </tr> <tr> <td>Emulsified Water</td> <td>scalar</td> <td>Visual*</td> <td>&gt;0.05</td> <td>NEG</td> <td>NEG</td> </tr> <tr> <td>Free Water</td> <td>scalar</td> <td>Visual*</td> <td></td> <td>NEG</td> <td>NEG</td> </tr>	Debris	scalar	Visual*	NONE	NONE	NONE	Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	Appearance	scalar	Visual*	NORML	NORML	NORML	Odor	scalar	Visual*	NORML	NORML	NORML	Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	Free Water	scalar	Visual*		NEG	NEG
Debris	scalar	Visual*	NONE	NONE	NONE																																			
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE																																			
Appearance	scalar	Visual*	NORML	NORML	NORML																																			
Odor	scalar	Visual*	NORML	NORML	NORML																																			
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG																																			
Free Water	scalar	Visual*		NEG	NEG																																			

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	101	95.2	94.3	93.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

