




# OIL ANALYSIS REPORT

Sample Rating Trend

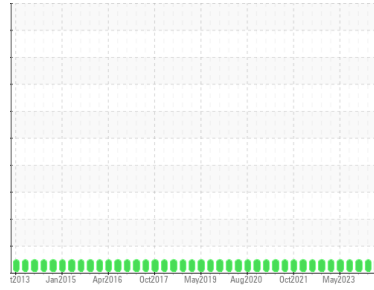

**NORMAL**



Area

**9**  
Machine Id  
**9-733 1st Belt Conveyor to Dock Silos**

Component

**Conveyor**

Fluid

**MOBIL MOBILGEAR 600 XP 320 (200 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>WC0925390</b>   | WC0902124   | WC0869933   |
| Sample Date   | Client Info | <b>03 Apr 2024</b> | 12 Feb 2024 | 01 Nov 2023 |
| Machine Age   | hrs         | Client Info        | <b>0</b>    | 0           |
| Oil Age       | hrs         | Client Info        | <b>0</b>    | 0           |
| Oil Changed   | Client Info | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

| method | limit/base     | current    | history1 | history2 |
|--------|----------------|------------|----------|----------|
| Water  | WC Method >0.1 | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

| method    | limit/base | current            | history1     | history2 |    |
|-----------|------------|--------------------|--------------|----------|----|
| Iron      | ppm        | ASTM D5185(m) >150 | <b>10</b>    | 9        | 11 |
| Chromium  | ppm        | ASTM D5185(m) >10  | <b>0</b>     | 0        | 0  |
| Nickel    | ppm        | ASTM D5185(m) >10  | <b>0</b>     | 0        | <1 |
| Titanium  | ppm        | ASTM D5185(m)      | <b>0</b>     | 0        | 0  |
| Silver    | ppm        | ASTM D5185(m)      | <b>0</b>     | 0        | <1 |
| Aluminum  | ppm        | ASTM D5185(m) >25  | <b>&lt;1</b> | <1       | <1 |
| Lead      | ppm        | ASTM D5185(m) >100 | <b>0</b>     | 0        | 0  |
| Copper    | ppm        | ASTM D5185(m) >50  | <b>&lt;1</b> | <1       | <1 |
| Tin       | ppm        | ASTM D5185(m) >10  | <b>0</b>     | 0        | 0  |
| Antimony  | ppm        | ASTM D5185(m) >5   | <b>0</b>     | 0        | 0  |
| Vanadium  | ppm        | ASTM D5185(m)      | <b>0</b>     | 0        | 0  |
| Beryllium | ppm        | ASTM D5185(m)      | <b>0</b>     | 0        | 0  |
| Cadmium   | ppm        | ASTM D5185(m)      | <b>0</b>     | 0        | 0  |

## ADDITIVES





| method     | limit/base | current             | history1     | history2 |      |
|------------|------------|---------------------|--------------|----------|------|
| Boron      | ppm        | ASTM D5185(m) 57    | <b>10</b>    | 10       | 20   |
| Barium     | ppm        | ASTM D5185(m) 0.0   | <b>0</b>     | 0        | <1   |
| Molybdenum | ppm        | ASTM D5185(m) 2.0   | <b>0</b>     | 0        | 0    |
| Manganese  | ppm        | ASTM D5185(m) 0.0   | <b>0</b>     | 0        | 0    |
| Magnesium  | ppm        | ASTM D5185(m) 0.0   | <b>1</b>     | <1       | 0    |
| Calcium    | ppm        | ASTM D5185(m) 42    | <b>12</b>    | 10       | 8    |
| Phosphorus | ppm        | ASTM D5185(m) 399   | <b>273</b>   | 270      | 240  |
| Zinc       | ppm        | ASTM D5185(m) 13    | <b>10</b>    | 9        | 17   |
| Sulfur     | ppm        | ASTM D5185(m) 13649 | <b>8659</b>  | 8947     | 8930 |
| Lithium    | ppm        | ASTM D5185(m)       | <b>&lt;1</b> | <1       | <1   |

## CONTAMINANTS

| method    | limit/base | current           | history1     | history2 |    |
|-----------|------------|-------------------|--------------|----------|----|
| Silicon   | ppm        | ASTM D5185(m) >50 | <b>3</b>     | 4        | 2  |
| Sodium    | ppm        | ASTM D5185(m)     | <b>0</b>     | <1       | 1  |
| Potassium | ppm        | ASTM D5185(m) >20 | <b>&lt;1</b> | <1       | <1 |

## FLUID CLEANLINESS

| method          | limit/base             | current         | history1 | history2 |
|-----------------|------------------------|-----------------|----------|----------|
| Particles >4µm  | ASTM D7647             | <b>113680</b>   | 106333   | 19666    |
| Particles >6µm  | ASTM D7647 >320000     | <b>25958</b>    | 21290    | 2965     |
| Particles >14µm | ASTM D7647 >160000     | <b>1019</b>     | 168      | 128      |
| Particles >21µm | ASTM D7647 >40000      | <b>200</b>      | 37       | 26       |
| Particles >38µm | ASTM D7647 >10000      | <b>5</b>        | 10       | 1        |
| Particles >71µm | ASTM D7647 >2500       | <b>3</b>        | 8        | 1        |
| Oil Cleanliness | ISO 4406 (c) >--/25/24 | <b>24/22/17</b> | 24/22/15 | 21/19/14 |

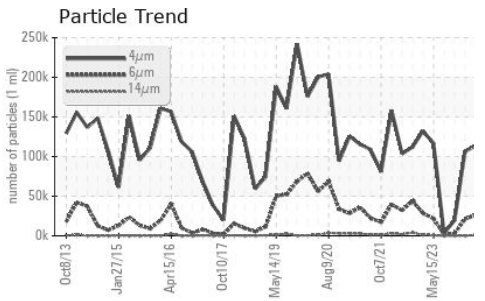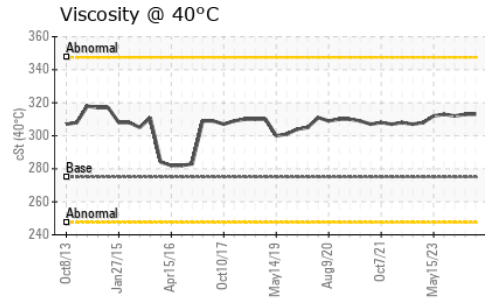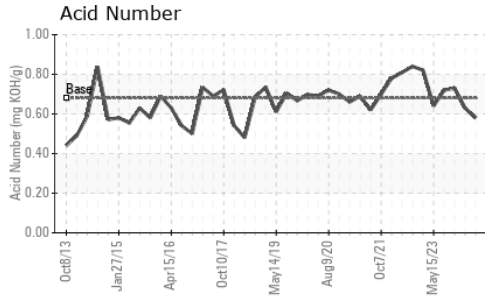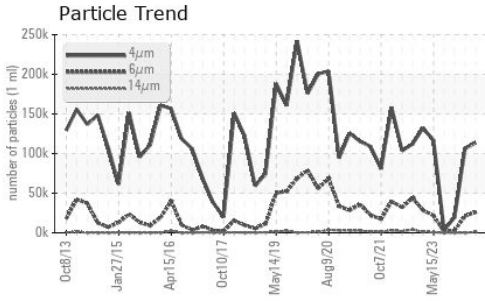


| FLUID DEGRADATION | method   | limit/base | current | history1    | history2 |      |
|-------------------|----------|------------|---------|-------------|----------|------|
| Acid Number (AN)  | mg KOH/g | ASTM D974* | 0.68    | <b>0.58</b> | 0.63     | 0.73 |






| VISUAL           | method | limit/base | current | history1     | history2 |       |
|------------------|--------|------------|---------|--------------|----------|-------|
| White Metal      | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Yellow Metal     | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Precipitate      | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Silt             | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Debris           | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Sand/Dirt        | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Appearance       | scalar | Visual*    | NORML   | <b>NORML</b> | NORML    | NORML |
| Odor             | scalar | Visual*    | NORML   | <b>NORML</b> | NORML    | NORML |
| Emulsified Water | scalar | Visual*    | >0.1    | <b>NEG</b>   | NEG      | NEG   |
| Free Water       | scalar | Visual*    |         | <b>NEG</b>   | NEG      | NEG   |

| FLUID PROPERTIES | method | limit/base    | current | history1   | history2 |     |
|------------------|--------|---------------|---------|------------|----------|-----|
| Visc @ 40°C      | cSt    | ASTM D7279(m) | 275     | <b>313</b> | 313      | 312 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

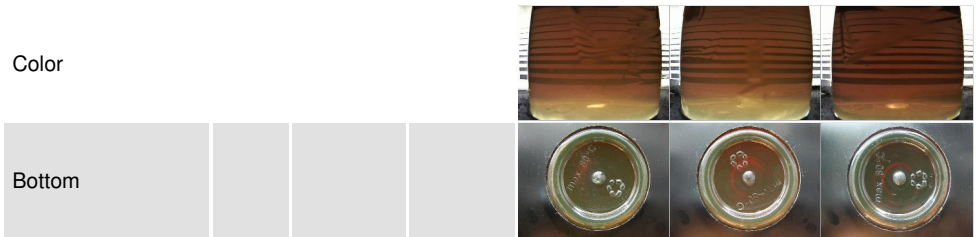

## GRAPHS

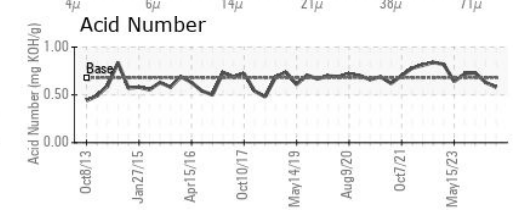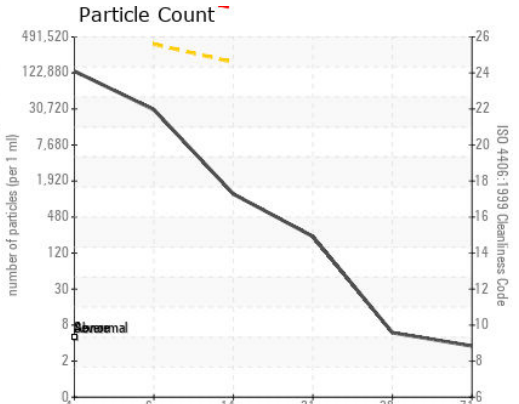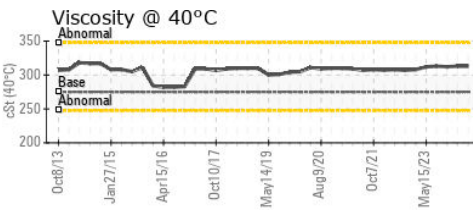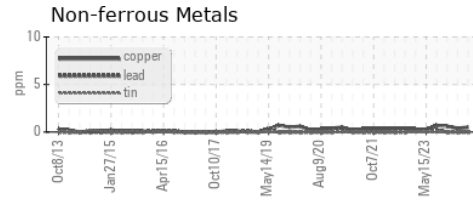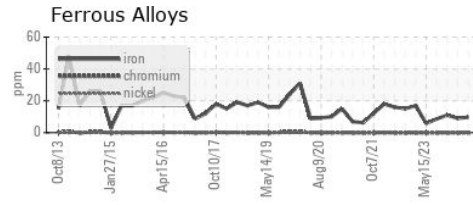

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0925390 **Received** : 16 Apr 2024  
**Lab Number** : **02629332** **Tested** : 17 Apr 2024  
**Unique Number** : 5762464 **Diagnosed** : 17 Apr 2024 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: PrtCount, TAN Man )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**ST. MARYS CEMENT CO.**  
 400 BOWMANVILLE AVENUE  
 BOWMANVILLE, ON  
 CA L1C 7B5  
 Contact: Lou Traiforos  
 lou.traiforos@vcimentos.com  
 T: (905)440-5874  
 F: (905)623-4695