




OIL ANALYSIS REPORT

Sample Rating Trend

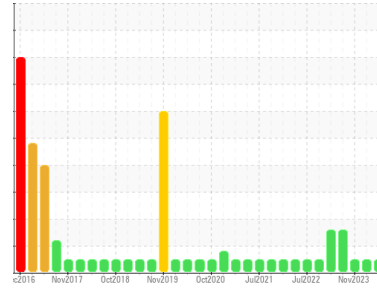

NORMAL



Area

6
Machine Id
6-3-609-NDE Primary Air Blower Non Drive End

Component
Blower

Fluid
MOBIL DTE OIL EXTRA HEAVY (20 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | WC0925349 | WC0902062 | WC0869892 |
| Sample Date | Client Info | 10 Apr 2024 | 15 Feb 2024 | 23 Nov 2023 |
| Machine Age | hrs | 0 | 0 | 0 |
| Oil Age | hrs | 0 | 0 | 0 |
| Oil Changed | Client Info | N/A | N/A | N/A |
| Sample Status | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|------------|------------|----------|----------|
| Water | WC Method | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|-----------|-------------|-------------------|--------------|----------|----|
| PQ | ASTM D8184* | 0 | 0 | 0 | |
| Iron | ppm | ASTM D5185(m) >20 | 5 | 5 | 4 |
| Chromium | ppm | ASTM D5185(m) >20 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) >20 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185(m) >20 | 2 | 2 | 2 |
| Lead | ppm | ASTM D5185(m) >20 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185(m) >20 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185(m) >20 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|---------------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 0 | 0 | <1 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) | 2 | 1 | <1 |
| Calcium | ppm | ASTM D5185(m) | 46 | 39 | 36 |
| Phosphorus | ppm | ASTM D5185(m) | 23 | 23 | 23 |
| Zinc | ppm | ASTM D5185(m) | 28 | 28 | 29 |
| Sulfur | ppm | ASTM D5185(m) | 3988 | 4248 | 4120 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS




| method | limit/base | current | history1 | history2 | |
|-----------|------------|-------------------|--------------|----------|----|
| Silicon | ppm | ASTM D5185(m) >15 | 8 | 8 | 7 |
| Sodium | ppm | ASTM D5185(m) | <1 | <1 | <1 |
| Potassium | ppm | ASTM D5185(m) >20 | 1 | 1 | <1 |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 | |
|------------------|------------|------------|-------------|----------|------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | 0.07 | 0.11 | 0.09 |




OIL ANALYSIS REPORT

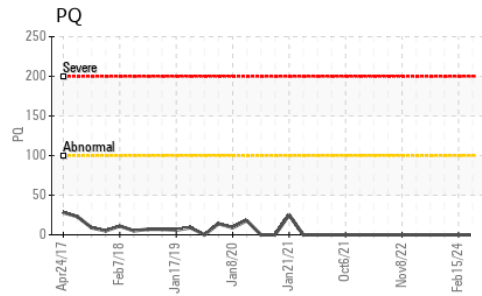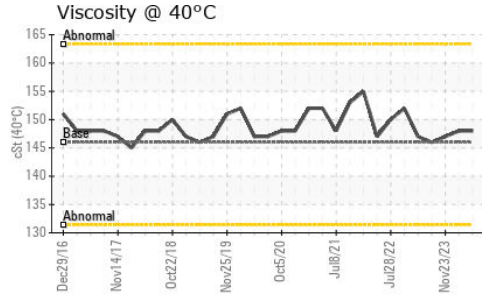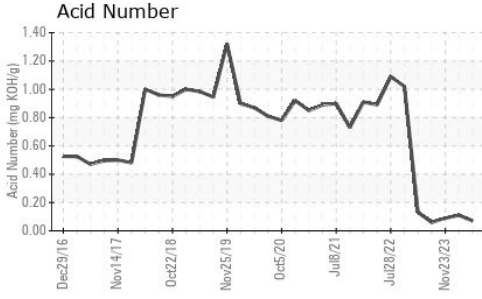






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | VLITE | NONE |
| Debris | scalar | Visual* | NONE | VLITE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | LIGHT |
| Appearance | scalar | Visual* | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | NEG | NEG | NEG |
| Free Water | scalar | Visual* | NEG | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 146 | 148 | 147 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

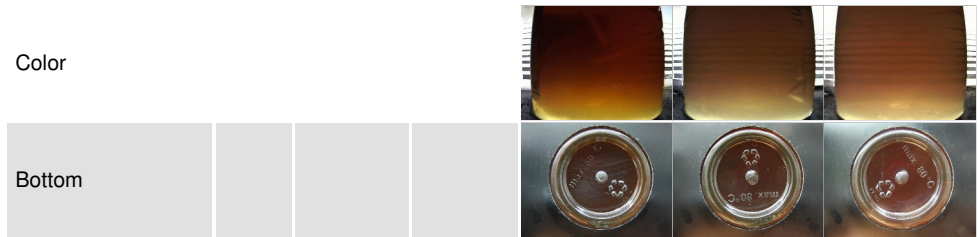

GRAPHS

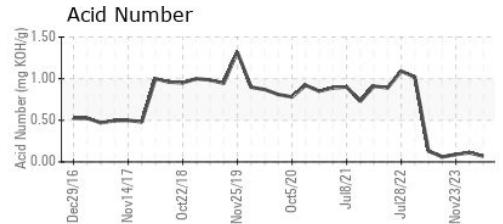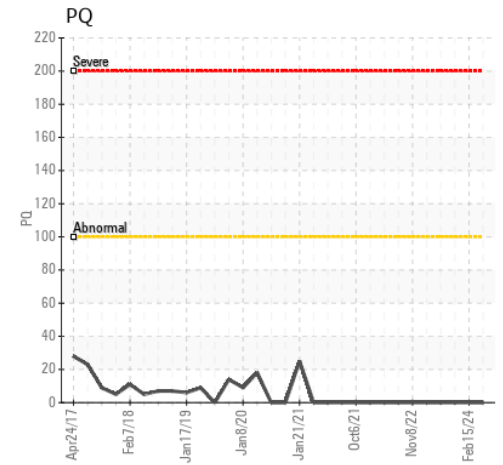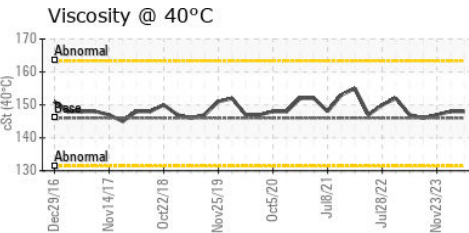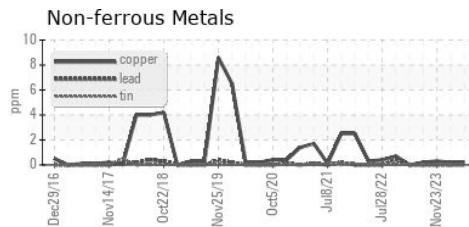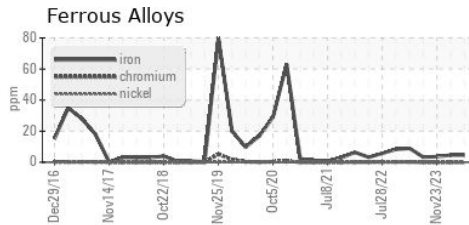

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0925349 **Received** : 16 Apr 2024
Lab Number : 02629350 **Tested** : 17 Apr 2024
Unique Number : 5762482 **Diagnosed** : 17 Apr 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: TAN Man)

ST. MARYS CEMENT CO.
 400 BOWMANVILLE AVENUE
 BOWMANVILLE, ON
 CA L1C 7B5
 Contact: Lou Traiforos
 lou.traiforos@vcimentos.com
 T: (905)440-5874
 F: (905)623-4695

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.