



GREASE ANALYSIS

Sample Rating Trend



VISCOSITY



Machine Id
64900276 JH EXPRESS D BULLWHEEL
 Component
Grease
 Fluid
MOBIL MOBILITH SHC SERIES 460 (--- GAL)

DIAGNOSIS

Recommendation

We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Grease Condition

Grease consistency has changed by 1-1/2 NLGI grades from NLGI 1-2 to 3.

Contaminants

There is no indication of any contamination in the grease.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		WC0679939	---	---
Sample Date		Client Info		04 Apr 2024	---	---
Machine Age	hrs	Client Info		5033	---	---
Grease Age	hrs	Client Info		0	---	---
Grease Serviced		Client Info		N/A	---	---
Sample Status				MARGINAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>200	0	---	---
Iron	ppm	ASTM D5185(m)	>250	8	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Lead	ppm	ASTM D5185(m)	>25	0	---	---
Copper	ppm	ASTM D5185(m)	>75	0	---	---
Tin	ppm	ASTM D5185(m)	>5	0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Phosphorus	ppm	ASTM D5185(m)		186	---	---
Zinc	ppm	ASTM D5185(m)		255	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---

THICKENER/SOAP		method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185(m)		0	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Calcium	ppm	ASTM D5185(m)		1	---	---
Sodium	ppm	ASTM D5185(m)		2	---	---
Lithium	ppm	ASTM D5185(m)		514	---	---
Sulfur	ppm	ASTM D5185(m)		737	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>150	0	---	---
Potassium	ppm	ASTM D5185(m)		<1	---	---





GREASE CONDITION		method	limit/base	current	history1	history2
Grease Color		Visual*	Red	Red	---	---
Texture		In-house*		Buttery	---	---
NLGI Consistency	NLGI Scale	SKF Method*	1-2	▲ 3	---	---

GREASE ANALYSIS

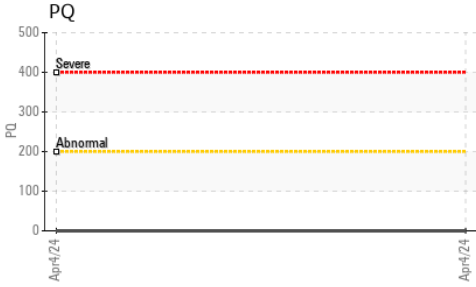

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

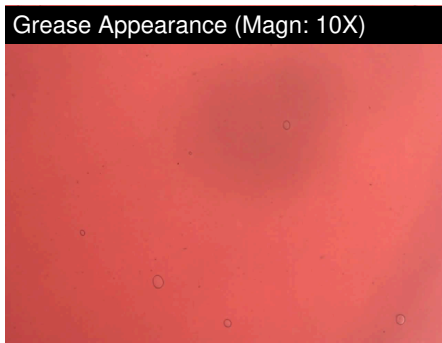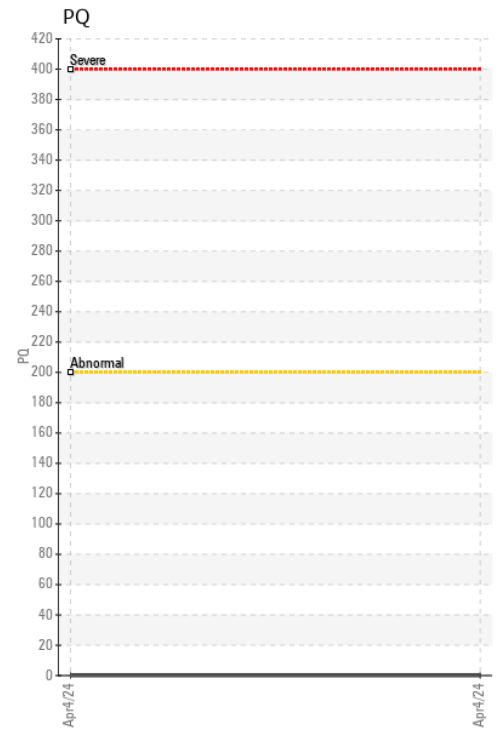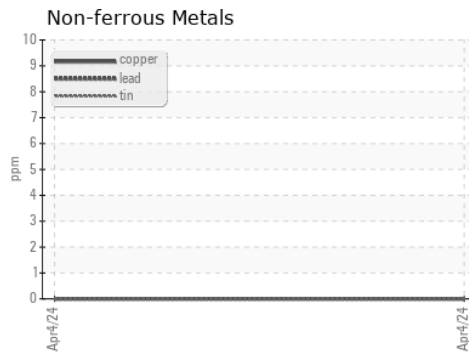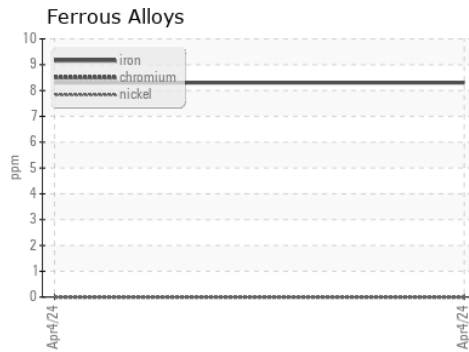

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0679939 **Received** : 16 Apr 2024
Lab Number : 02629410 **Tested** : 22 Apr 2024
Unique Number : 5762542 **Diagnosed** : 22 Apr 2024 - Bill Quesnel
Test Package : GRS 1 (Additional Tests: BottomAnalysis)

Mount St. Louis Moonstone
 R.R. # 4,, 24 Mount St. Louis Road
 Coldwater, ON
 CA L0K 1E0
 Contact: Andre Huter
 a.huter@mslm.on.ca
 T: (705)835-2112
 F: (705)835-5967

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.