

OIL ANALYSIS REPORT

Metelix - M10200

AG284

Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

Sample Rating Trend **WEAR**

DIAGNOSIS

Recommendation

The sample submitted is 4 times dirtier than the ISO dirt count recommendation of 19/16/14.

Copper ppm levels are noted.

Contamination

Particles >6µm and oil cleanliness are abnormally high. Particles >4µm are notably high.

				Apr2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Machine ID		Client Info		Press 3		
Department		Client Info		Sales		
Sample From		Client Info		Machine		
Production Stage		Client Info		Initial		
Sent to WC		Client Info		04/15/2024		
Sample Number		Client Info		E30001846		
Sample Date		Client Info		03 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base		hiotomut	hiotomyO
				current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	5		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	9		
Copper	ppm	ASTM D5185(m)	>20	<u>21</u>		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<1		
Barium	ppm	ASTM D5185(m)	5	0		
Molybdenum	ppm	ASTM D5185(m)	5	0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)	25	30		
Calcium	ppm	ASTM D5185(m)	200	65		
Phosphorus	ppm	ASTM D5185(m)	300	398		
Zinc	ppm	ASTM D5185(m)	370	445		
Sulfur	ppm	ASTM D5185(m)	2500	1011		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		1		
Potassium	ppm	ASTM D5185(m)	>20	0		
Water	%	ASTM D6304*	>0.05	0.001		
147 .		4 OT1 4 D000 11	F00	40		

ASTM D6304* >500


ppm

13

ppm Water



OIL ANALYSIS REPORT

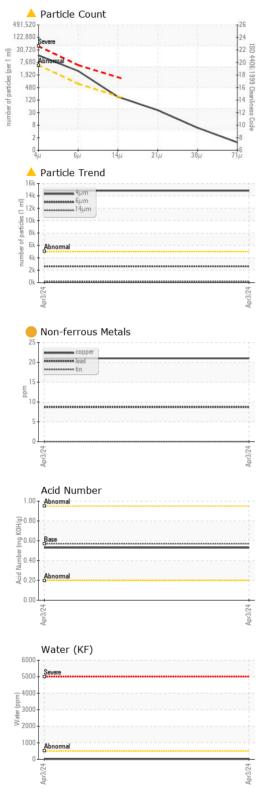

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<u> </u>		
Particles >6µm		ASTM D7647	>640	^ 2625		
Particles >14µm		ASTM D7647	>160	152		
Particles >21µm		ASTM D7647	>40	35		
Particles >38µm		ASTM D7647	>10	5		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	<u> </u>		
FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.53		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	VLITE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERTI	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	45.4		
Visc @ 100°C	cSt	ASTM D7279(m)	6.7	7.1		
Viscosity Index (VI)	Scale	ASTM D2270*	97	115		
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: E30001846 Lab Number : 02629616 Unique Number : 5762748

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Received : 17 Apr 2024 **Tested** : 18 Apr 2024 Diagnosed : 19 Apr 2024 - Tatiana Sorkina

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950