



Area
ENERGY CRANE

Machine Id
086178

Component
Diesel Fuel

Fluid
No.2 DIESEL FUEL (ULTRALOW SULPHUR) (46 LTR)

DIAGNOSIS

Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We advise that you filter this fluid before use. We recommend an early resample to monitor this condition.

Contaminants

There is a moderate amount of particulates (2 to 100 microns in size) present in the fuel. The water content is negligible.

Fuel Condition

The fuel is still serviceable provided that the contaminant(s) can be reduced to acceptable levels. All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel (US EPA/CGSB-3.517-3 type B).

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			LH0218024	---	---
Sample Date	Client Info			12 Apr 2024	---	---
Machine Age	kms	Client Info		1306	---	---
Sample Status				ABNORMAL	---	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		ASTM D1298*	0.839	0.847	---	---
Fuel Color	text	Visual Screen*	Yellow	Yellow	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	3.0	2.3	---	---
Pensky-Martens Flash Point	°C	ASTM D7215*	52	61.7	---	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	10	7	---	---






DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*	165	173	---	---
5% Distillation Point	°C	ASTM D2887*		199	---	---
10% Distill Point	°C	ASTM D2887*	201	207	---	---
15% Distillation Point	°C	ASTM D2887*		213	---	---
20% Distill Point	°C	ASTM D2887*	216	220	---	---
30% Distill Point	°C	ASTM D2887*	230	230	---	---
40% Distill Point	°C	ASTM D2887*	243	240	---	---
50% Distill Point	°C	ASTM D2887*	255	249	---	---
60% Distill Point	°C	ASTM D2887*	267	260	---	---
70% Distill Point	°C	ASTM D2887*	280	270	---	---
80% Distill Point	°C	ASTM D2887*	295	282	---	---
85% Distillation Point	°C	ASTM D2887*		291	---	---
90% Distill Point	°C	ASTM D2887*	310	300	---	---
95% Distillation Point	°C	ASTM D2887*		316	---	---
Final Boiling Point	°C	ASTM D2887*	341	334	---	---

IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	37.7	35	---	---
Cetane Index		ASTM D4737*	<40.0	43	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	0	---	---
Sodium	ppm	ASTM D5185(m)	<0.1	<1	---	---
Potassium	ppm	ASTM D5185(m)	<0.1	0	---	---
Water	%	ASTM D6304*	<0.05	0.002	---	---
ppm Water	ppm	ASTM D6304*	<500	17	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	3733	---	---
Particles >6µm		ASTM D7647	>640	916	---	---
Particles >14µm		ASTM D7647	>80	106	---	---
Particles >21µm		ASTM D7647	>20	44	---	---
Particles >38µm		ASTM D7647	>4	7	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>18/16/13	19/17/14	---	---




FUEL REPORT

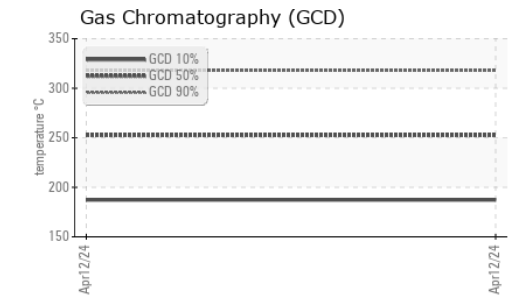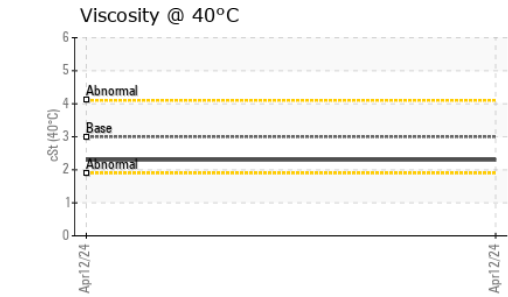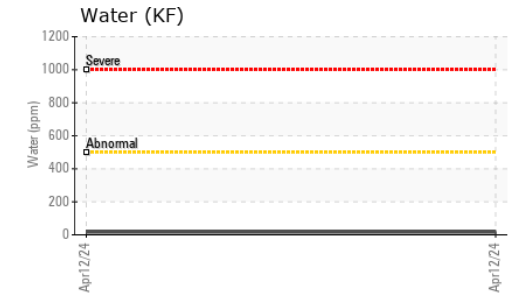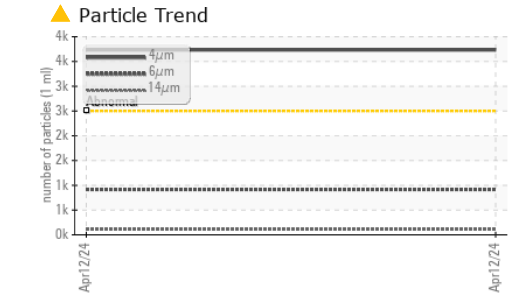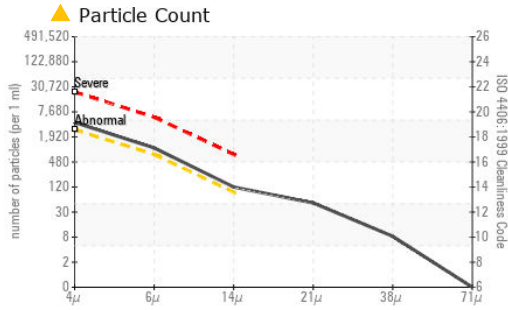

HEAVY METALS	method	limit/base	current	history1	history2	
Aluminum	ppm	ASTM D5185(m)	<0.1	0	---	---
Nickel	ppm	ASTM D5185(m)	<0.1	0	---	---
Lead	ppm	ASTM D5185(m)	<0.1	0	---	---
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---	---
Iron	ppm	ASTM D5185(m)	<0.1	0	---	---
Calcium	ppm	ASTM D5185(m)	<0.1	0	---	---
Magnesium	ppm	ASTM D5185(m)	<0.1	0	---	---
Phosphorus	ppm	ASTM D5185(m)	<0.1	0	---	---
Zinc	ppm	ASTM D5185(m)	<0.1	0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

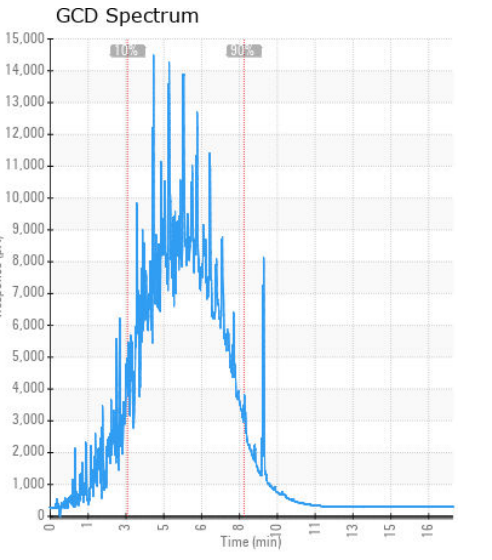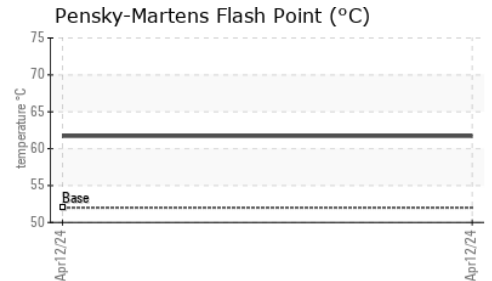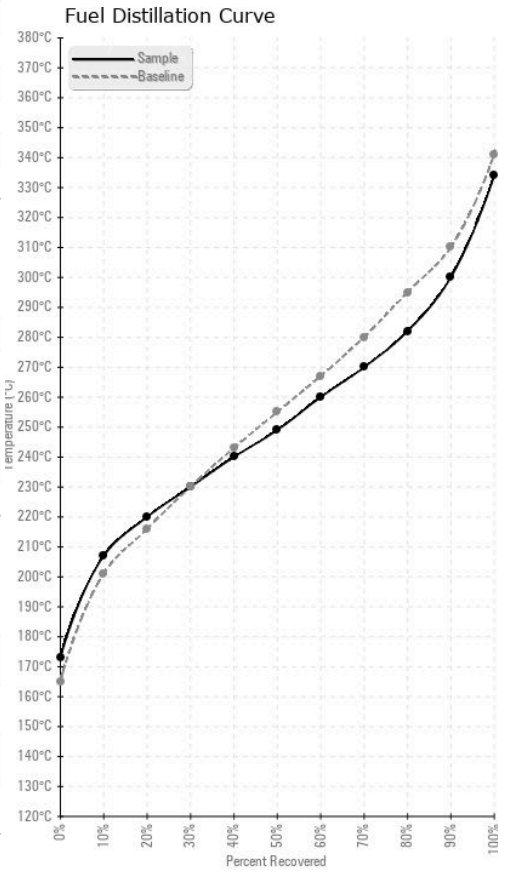

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0218024 **Received** : 17 Apr 2024
Lab Number : 02629810 **Tested** : 22 Apr 2024
Unique Number : 5762942 **Diagnosed** : 22 Apr 2024 - Kevin Marson
Test Package : FUEL (Additional Tests: CC Flash, PrtCount)

LIEBHERR CANADA LTD.
 10374 267 ST.
 ACHESON, AB
 CA T7X 6A2
 Contact: Dustin Fluet
 dustin.fluet@liebherr.com
 T: (780)962-6088
 F: (780)962-6799

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.