




OIL ANALYSIS REPORT

Sample Rating Trend

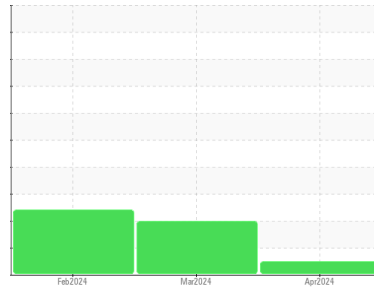

NORMAL



Area

LEMIRE ET POIRIER INC [02629814]

Machine Id

JOHN DEERE 35P 1FF35PACPK000462

Component

Hydraulic System

Fluid

PANOLIN HLP SYNTH 46 (56 LTR)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il y a une faible concentration (<5.0%) d'huile minérale présente dans le fluide. La propreté du système est acceptable pour votre objectif de propreté ISO 4406. La teneur en eau est négligeable. La propreté du système et du fluide est acceptable.

Fluid Condition

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0893395	WC	WC
Sample Date	Client Info		16 Apr 2024	04 Mar 2024	21 Feb 2024
Machine Age	hrs	Client Info	9	7	5
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>32	0	0	<1
Chromium	ppm	ASTM D5185(m)	>9	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>9	0	<1	<1
Lead	ppm	ASTM D5185(m)	>28	0	0	<1
Copper	ppm	ASTM D5185(m)	>50	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<1	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	1
Calcium	ppm	ASTM D5185(m)	0	1	<1	2
Phosphorus	ppm	ASTM D5185(m)	1700	1513	1541	1560
Zinc	ppm	ASTM D5185(m)	0	2	2	4
Sulfur	ppm	ASTM D5185(m)	1350	1191	1357	1359
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>11	0	<1	<1
Sodium	ppm	ASTM D5185(m)	>21	1	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water	%	ASTM D6304*	>0.05	0.025	---	0.018
ppm Water	ppm	ASTM D6304*	>500	259	---	180


INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*		3.9	3.6	3.7
Sulfation	Abs/.1mm	ASTM D7415*		155.0	149.4	139.5
Mineral Oil Content	%	ASTM D7418*	<5.0%	<5.0	▲ 7.0	▲ 7.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

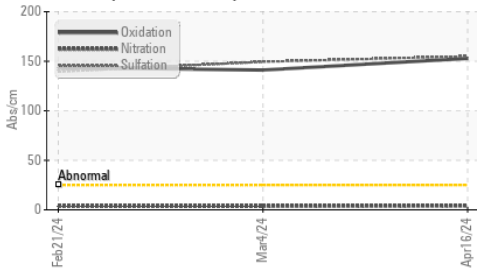


Particle Count

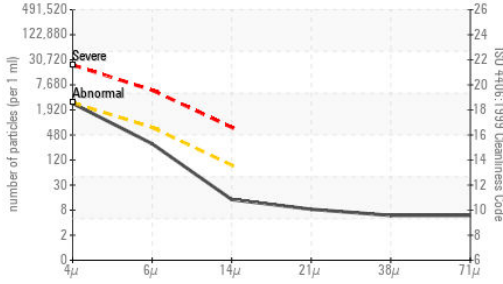


Acid Number

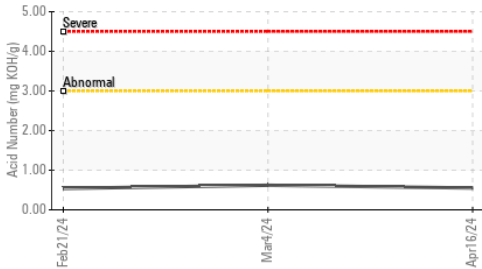

Water (KF)

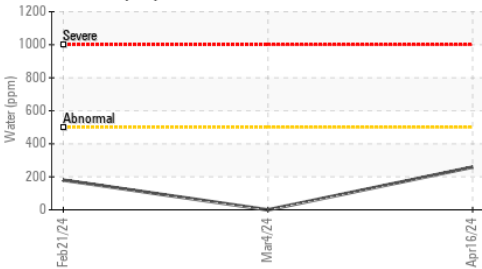

Viscosity @ 100°C

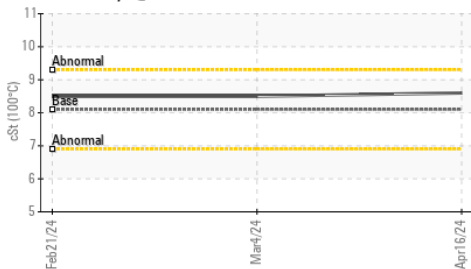


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	2415	4273	10708
Particles >6µm	ASTM D7647	>640	259	295	1356
Particles >14µm	ASTM D7647	>80	12	6	26
Particles >21µm	ASTM D7647	>20	7	3	7
Particles >38µm	ASTM D7647	>4	5	3	3
Particles >71µm	ASTM D7647	>3	5	2	2
Oil Cleanliness	ISO 4406 (c)	>18/16/13	18/15/11	19/15/10	21/18/12

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	152.9	141.1	143.7
Acid Number (AN)	mg KOH/g	ASTM D974*	0.55	0.62	0.54

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	NEG	NEG	NEG
Free Water	scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	47.4	47.1	48.3
Visc @ 100°C	cSt	ASTM D7279(m)	8.6	8.5	8.5
Viscosity Index (VI)	Scale	ASTM D2270*	161	159	153

SAMPLE IMAGES

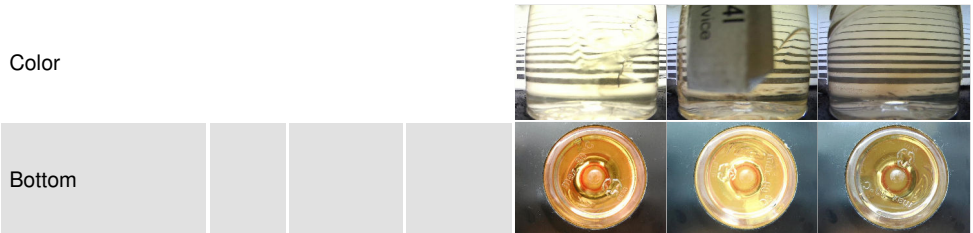

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0893395 **Received** : 17 Apr 2024
Lab Number : **02629813** **Tested** : 19 Apr 2024
Unique Number : 5762945 **Diagnosed** : 22 Apr 2024 - Bill Quesnel
Test Package : MOB 2 (Additional Tests: TAN Man)

Envirolin Canada
 520 rue Adanac
 Quebec, QC
 CA G1C 7B7
 Contact: Patrick Levesque
 patrick.levesque@envirolin.com
 T: (418)623-1216
 F: (418)660-8889

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.



MINERAL OIL CONTENT REPORT

PASS




Area
LEMIRE ET POIRIER INC [02629814]
 Machine Id
JOHN DEERE 35P 1FF35PACPK000462
 Component
Hydraulic System
 Fluid
PANOLIN HLP SYNTH 46 (56 LTR)


SPECTRAL ANALYSIS

		method	limit/base	current	history1	history2
Zinc	ppm	ASTM D5185(m)	0	2	2	4
Mineral Oil Content	%	ASTM D7418*	<5.0%	<5.0	▲ 7.0	▲ 7.9


FT-IR - Esters I

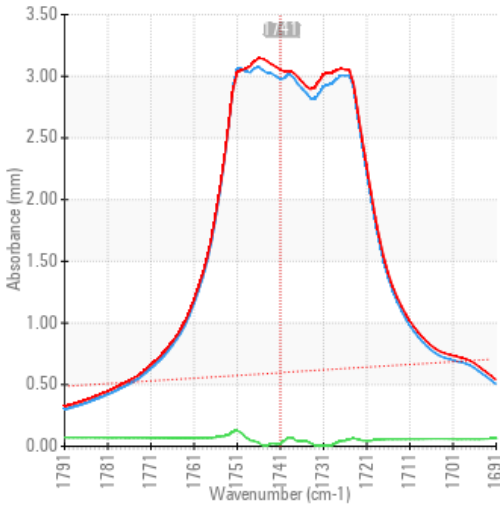

FT-IR - Esters II

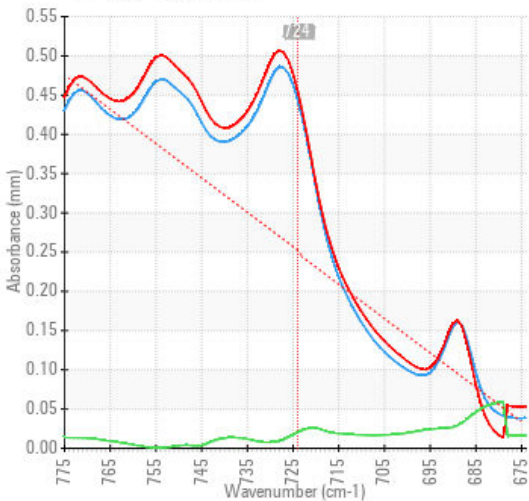

FT-IR Spectrum (Absorbance)

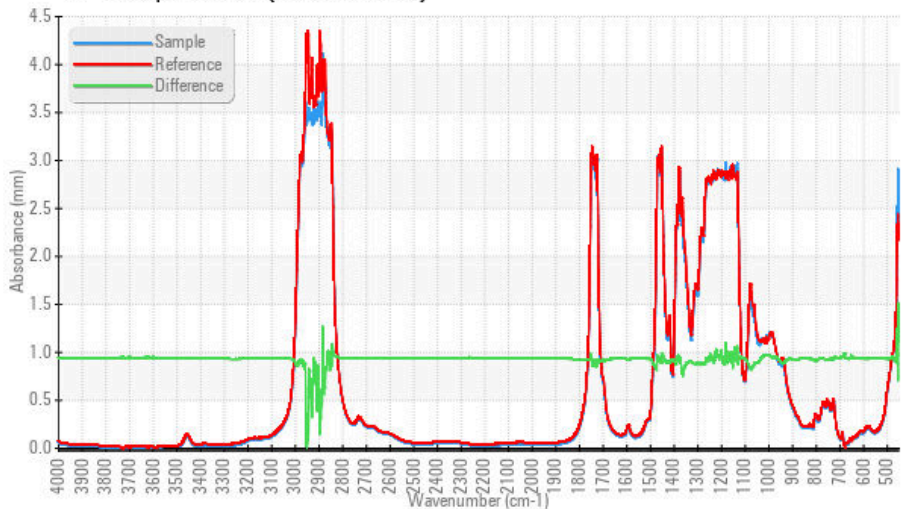

ISO 17025:2017
 Accredited
 Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0893395 **Received** : 17 Apr 2024
Lab Number : 02629813 **Tested** : 19 Apr 2024
Unique Number : 5762945 **Diagnosed** : 22 Apr 2024 - Bill Quesnel
Test Package : MOB 2 (Additional Tests: TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Envirolin Canada

520 rue Adanac
 Quebec, QC
 CA G1C 7B7
 Contact: Patrick Levesque
 patrick.levesque@envirolin.com
 T: (418)623-1216
 F: (418)660-8889

This page left intentionally blank