




OIL ANALYSIS REPORT

Sample Rating Trend

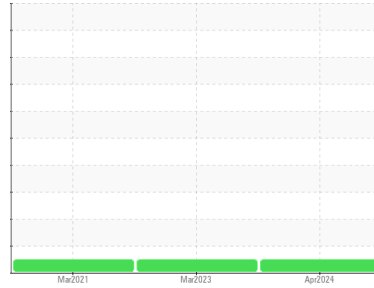

NORMAL



Machine Id
JOHN DEERE M0116
 Component
Diesel Engine
 Fluid
DISEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0836786	WC0709849	WC0510758
Sample Date	Client Info		01 Apr 2024	22 Mar 2023	15 Mar 2021
Machine Age	hrs	Client Info	116	90	33
Oil Age	hrs	Client Info	42	17	0
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	<1.0	0.2
Water	WC Method	>0.21	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>51	4	2	11
Chromium	ppm	ASTM D5185(m)	>11	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>31	1	<1	7
Lead	ppm	ASTM D5185(m)	>26	<1	0	4
Copper	ppm	ASTM D5185(m)	>26	1	<1	6
Tin	ppm	ASTM D5185(m)	>4	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	<1
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	26	9	249
Barium	ppm	ASTM D5185(m)	10	<1	0	1
Molybdenum	ppm	ASTM D5185(m)	100	25	8	281
Manganese	ppm	ASTM D5185(m)		<1	<1	2
Magnesium	ppm	ASTM D5185(m)	450	88	31	802
Calcium	ppm	ASTM D5185(m)	3000	2105	2146	1451
Phosphorus	ppm	ASTM D5185(m)	1150	833	866	847
Zinc	ppm	ASTM D5185(m)	1350	953	917	1035
Sulfur	ppm	ASTM D5185(m)	4250	2854	2878	2787
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>22	1	3	9
Sodium	ppm	ASTM D5185(m)	>158	2	2	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	2

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	5.6	4.9	6.5
Sulfation	Abs./1mm	ASTM D7415*	>30	15.7	15.1	20.8



OIL ANALYSIS REPORT

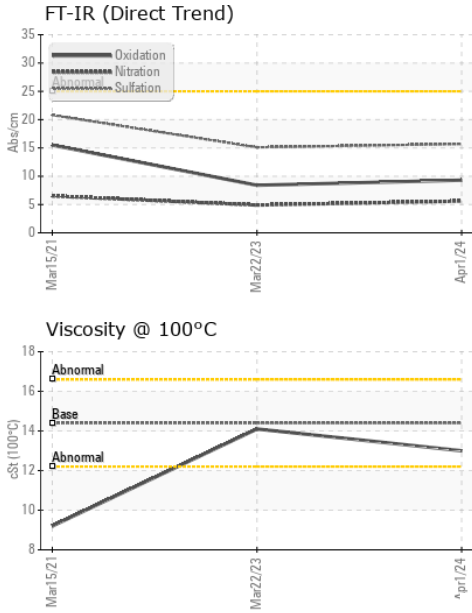


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	9.3	8.4	15.5

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	LIGHT
Yellow Metal	scalar	Visual*	NONE	NONE	---	NONE
Precipitate	scalar	Visual*	NONE	NONE	---	NONE
Silt	scalar	Visual*	NONE	NONE	---	NONE
Debris	scalar	Visual*	NONE	VLITE	---	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	---	NONE
Appearance	scalar	Visual*	NORML	NORML	---	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.21	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.0	14.1	9.2

GRAPHS

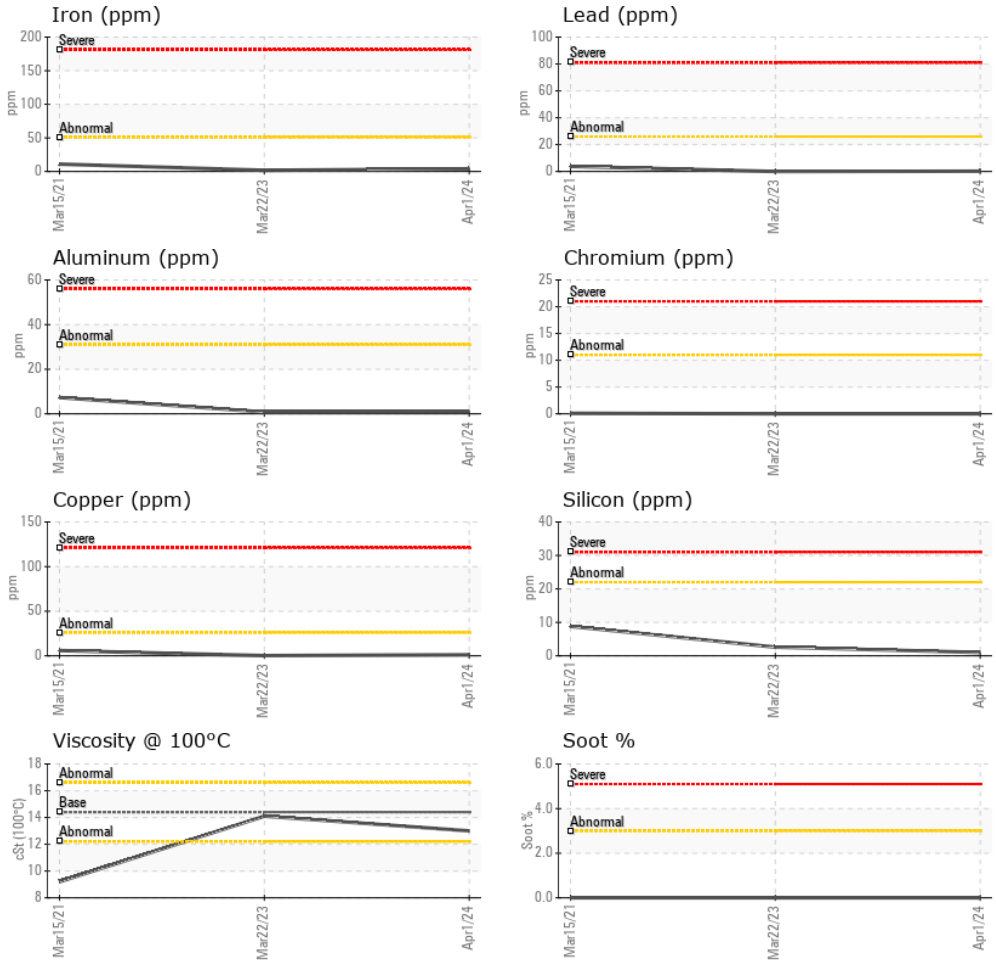

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0836786 **Received** : 19 Apr 2024
Lab Number : **02630089** **Tested** : 19 Apr 2024
Unique Number : 5763221 **Diagnosed** : 19 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

GENCARE SERVICES LTD.
 360 SOVEREIGN ROAD
 LONDON, ON
 CA N6M 1A8
 Contact: Teresa Matthews
 tmatthews@gencare.com
 T: (519)659-7118
 F: (519)451-1707

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.