


OIL ANALYSIS REPORT

EAST CRANE 170831 (S/N M-9132A)

Distribution Gear

{not provided} (--- GAL)

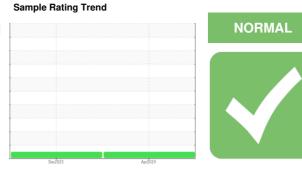

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PP	PP	
Sample Date		Client Info		18 Apr 2024	14 Dec 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATIO	V	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>200	0	0	
Iron	ppm	ASTM D5185(m)	>185	15	15	
Chromium	ppm	ASTM D5185(m)	>5	0	0	
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		0	<1	
Aluminum	ppm	ASTM D5185(m)	>10	0	<1	
Lead	ppm	ASTM D5185(m)	>35	0	<1	
Copper	ppm	ASTM D5185(m)	>35	21	25	
Tin	ppm	ASTM D5185(m)	>5	0	0	
Antimony	ppm	ASTM D5185(m)	>5	0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	<1	
Barium	ppm	ASTM D5185(m)		1	2	
Molybdenum	ppm	ASTM D5185(m)		0	0	
Manganese	ppm	ASTM D5185(m)		<1	<1	
Magnesium	ppm	ASTM D5185(m)		1	<1	
Calcium	ppm	ASTM D5185(m)		12	13	
Phosphorus	ppm	ASTM D5185(m)		475	525	
Zinc	ppm	ASTM D5185(m)		137	128	
Sulfur	ppm	ASTM D5185(m)		6325	6915	
Lithium	ppm	ASTM D5185(m)		1	1	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>150	5	7	
Sodium	ppm	ASTM D5185(m)		1	1	
Potassium	ppm	ASTM D5185(m)	>20	<1	0	
FLUID DEGRADA	TION_	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.68	0.81	



OIL ANALYSIS REPORT

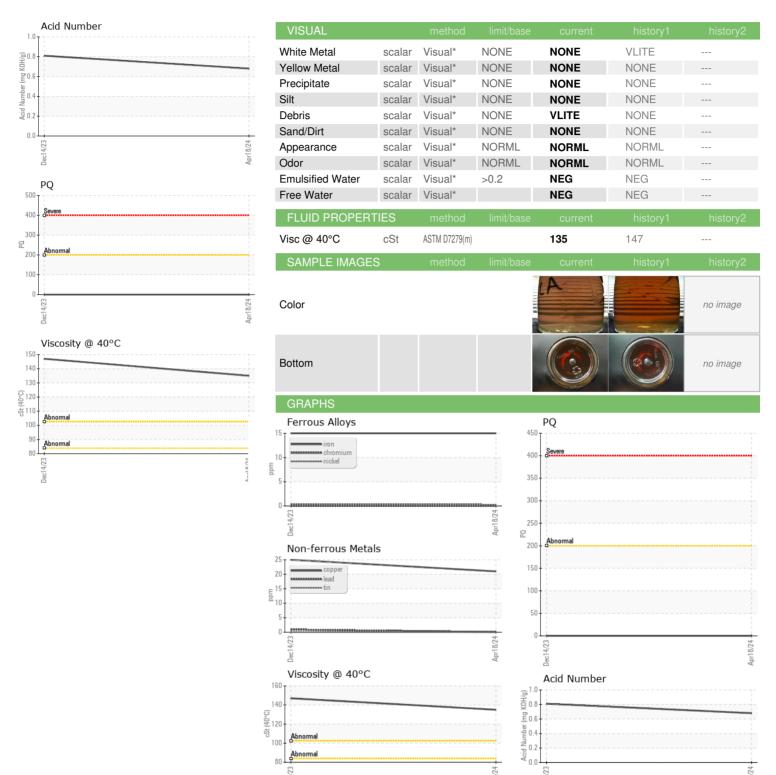



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No. Lab Number : 02630198 Unique Number : 5763330 Test Package : IND 2

: PP

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 19 Apr 2024 Tested : 22 Apr 2024

Diagnosed : 22 Apr 2024 - Kevin Marson

SUITE 1000,, 100 NEW GOWER STREET

ST.JOHNS, NL **CA A1C 6K3** Contact: Sam Nash

samantha.m.nash@exxonmobil.com T:

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Contact/Location: Sam Nash - HIBSTJ

HIBERNIA MGMT & DEVELOPMENT CO. LTD

F: (709)722-3766