

**OIL ANALYSIS REPORT** 

FIO Automotive - F03000 A2404097

Unknown Component

**AW HYDRAULIC OIL ISO 32 (--- GAL)** 

# Sample Rating Trend NORMAL


## Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

		Apr2024								
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2				
Batch #		Client Info		Mobile						
Machine ID		Client Info		G2 Coil						
Department		Client Info		Production						
Sample From		Client Info		Machine						
Production Stage		Client Info		Initial						
Sent to WC		Client Info		04/17/2024						
Sample Number		Client Info		E30001888						
Sample Date		Client Info		16 Apr 2024						
Machine Age	hrs	Client Info		0						
Oil Age	hrs	Client Info		0						
Oil Changed		Client Info		N/A						
Sample Status				NORMAL						
WEAR METALS		method	limit/base	current	history1	history2				
Iron	ppm	ASTM D5185(m)		2						
Chromium	ppm	ASTM D5185(m)		0						
Nickel	ppm	ASTM D5185(m)		0						
Titanium	ppm	ASTM D5185(m)		0						
Silver	ppm	ASTM D5185(m)		0						
Aluminum	ppm	ASTM D5185(m)		<1						
Lead	ppm	ASTM D5185(m)		5						
Copper	ppm	ASTM D5185(m)		3						
Tin	ppm	ASTM D5185(m)		0						
Antimony	ppm	ASTM D5185(m)		0						
Vanadium	ppm	ASTM D5185(m)		0						
Beryllium	ppm	ASTM D5185(m)		0						
Cadmium	ppm	ASTM D5185(m)		0						
ADDITIVES		method	limit/base	current	history1	history2				
Boron	ppm	ASTM D5185(m)	5	<1						
Barium	ppm	ASTM D5185(m)	5	0						
Molybdenum	ppm	ASTM D5185(m)	5	0						
Manganese	ppm	ASTM D5185(m)	0.5	0						
Magnesium	ppm	ASTM D5185(m)	25	55						
Calcium	ppm	ASTM D5185(m)	200	80						
Phosphorus	ppm	ASTM D5185(m)	300	417						
Zinc Sulfur	ppm	ASTM D5185(m) ASTM D5185(m)	370 2500	498 1208						
Lithium	ppm ppm	ASTM D5185(m)	2000	<1						
			limit/lana							
CONTAMINANTS		method	limit/base	current	history1	history2				
Silicon	ppm	ASTM D5185(m)		0						
Sodium	ppm	ASTM D5185(m)	00	<1						
Potassium	ppm	ASTM D5185(m)	>20	<1						
Water	%	ASTM D6304*		0.002						
ppm Water	ppm	ASTM D6304*		17						



# **OIL ANALYSIS REPORT**

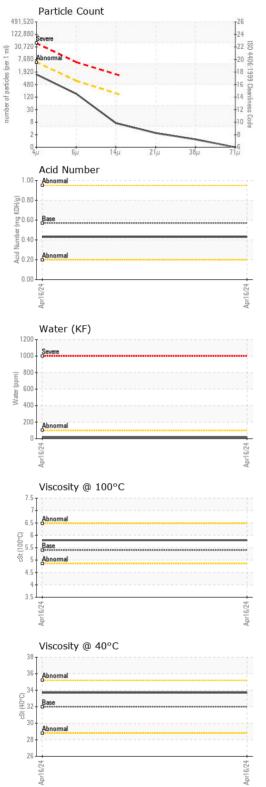

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1297		
Particles >6µm		ASTM D7647	>640	154		
Particles >14μm		ASTM D7647	>160	6		
Particles >21μm		ASTM D7647	>40	2		
Particles >38μm		ASTM D7647	>10	1		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	17/14/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.43		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32	33.7		
Visc @ 100°C	cSt	ASTM D7279(m)	5.4	5.8		
Viscosity Index (VI)	Scale	ASTM D2270*	102	114		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



**CALA** ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number : 02630221 Unique Number : 5763353

: E30001888

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 19 Apr 2024

**Tested** : 23 Apr 2024 Diagnosed : 24 Apr 2024 - Tatiana Sorkina

Test Package : IND 2 ( Additional Tests: KF, KV100, PrtCount, VI ) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950