



OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Machine Id
SUBARU AHXB686

Component
Transmission (Auto)
Fluid
{not provided} (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check all areas where dirt can enter the system. The fluid change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate concentration of dirt present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The fluid is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0930981	---	---
Sample Date	Client Info			15 Apr 2024	---	---
Machine Age	kms	Client Info		89000	---	---
Oil Age	kms	Client Info		0	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				ABNORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>160	36	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	7	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>225	13	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		91	---	---
Barium	ppm	ASTM D5185(m)		3	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)		2	---	---
Calcium	ppm	ASTM D5185(m)		274	---	---
Phosphorus	ppm	ASTM D5185(m)		621	---	---
Zinc	ppm	ASTM D5185(m)		34	---	---
Sulfur	ppm	ASTM D5185(m)		1979	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	▲ 46	---	---
Sodium	ppm	ASTM D5185(m)		4	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		1.85	---	---



OIL ANALYSIS REPORT

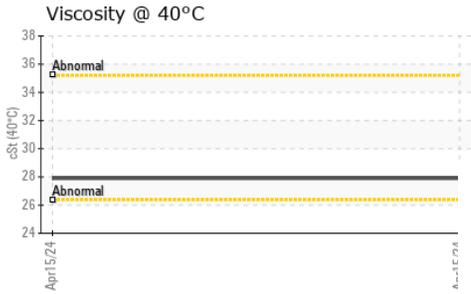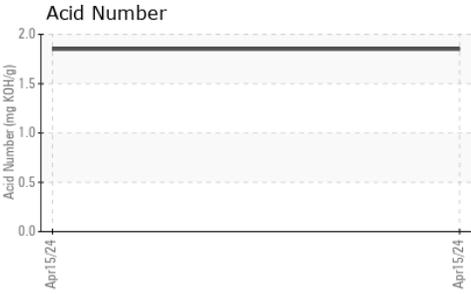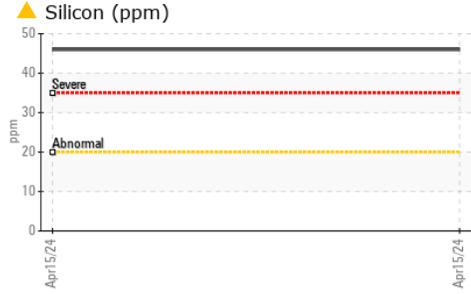









VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	27.9	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

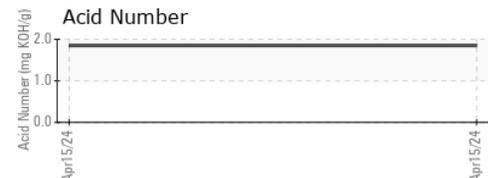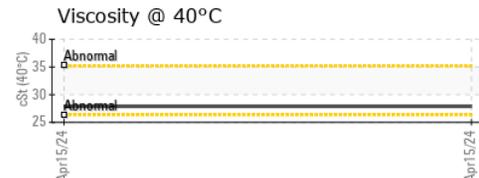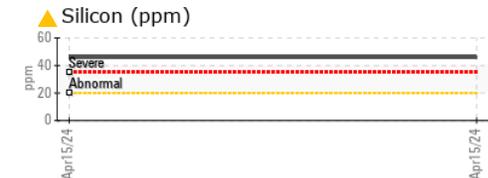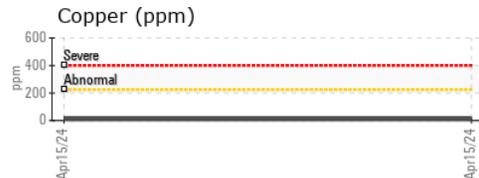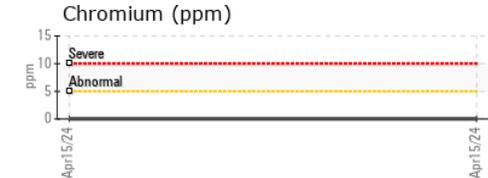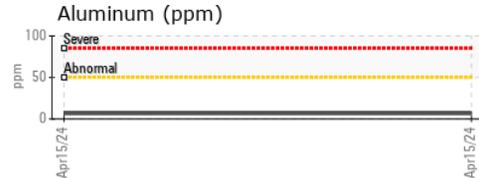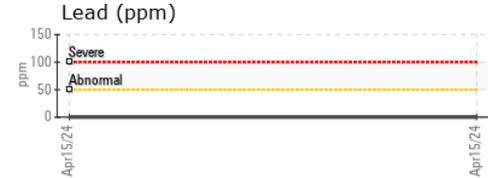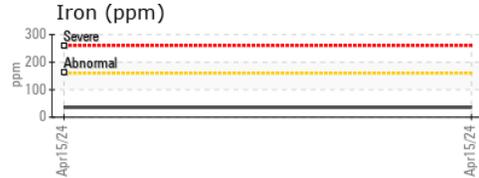

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0930981 **Received** : 19 Apr 2024
Lab Number : 02630304 **Tested** : 22 Apr 2024
Unique Number : 5763436 **Diagnosed** : 22 Apr 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: TAN Man)

Rafael Uruena
 5 Marine Parade Drive
 Toronto, ON
 CA M8V 4B4
 Contact: Rafael Uruena
 moonbase1999@hotmail.com
 T: (416)884-4807
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.