

OIL ANALYSIS REPORT

Area
Chem-Ecol A2404120

Hydraulic System

CHEM-ECOL AEROGUN 35 (--- GAL)

Sample Rating Trend NORMAL

Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

						•		
	Apr2024							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2		
	VIATION		IIIIII/Dase		Tilstory	HISTOLYZ		
Batch #		Client Info		3067-A				
Department		Client Info		Production				
Sample From		Client Info		Machine				
Production Stage		Client Info		Final				
Sent to WC		Client Info		04/19/2024				
Sample Number		Client Info		E30001911				
Sample Date		Client Info		18 Apr 2024				
Machine Age	hrs	Client Info		0				
Oil Age	hrs	Client Info		0				
Oil Changed		Client Info		N/A				
Sample Status				NORMAL				
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>20	0				
Chromium	ppm	ASTM D5185(m)		0				
Nickel	ppm	ASTM D5185(m)	>20	0				
Titanium	ppm	ASTM D5185(m)		<1				
Silver	ppm	ASTM D5185(m)		0				
Aluminum	ppm	ASTM D5185(m)	>20	0				
Lead	ppm	ASTM D5185(m)	>20	0				
Copper	ppm	ASTM D5185(m)	>20	<1				
Tin	ppm	ASTM D5185(m)	>20	0				
Antimony	ppm	ASTM D5185(m)		0				
Vanadium	ppm	ASTM D5185(m)		0				
Beryllium	ppm	ASTM D5185(m)		0				
Cadmium	ppm	ASTM D5185(m)		0				
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)		0				
Barium	ppm	ASTM D5185(m)		0				
Molybdenum	ppm	ASTM D5185(m)		0				
Manganese	ppm	ASTM D5185(m)		0				
Magnesium	ppm	ASTM D5185(m)		<1				
Calcium	ppm	ASTM D5185(m)		<1				
Phosphorus	ppm	ASTM D5185(m)		3				
Zinc	ppm	ASTM D5185(m)		3				
Sulfur	ppm	ASTM D5185(m)		16059				
Lithium	ppm	ASTM D5185(III) ASTM D5185(m)		<1				
			Line it flo					
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>15	0				
Sodium	ppm	ASTM D5185(m)		0				
Potassium	ppm	ASTM D5185(m)	>20	0				
Water	%	ASTM D6304*	>0.05	0.002				


ppm Water

ppm ASTM D6304* >500

21



OIL ANALYSIS REPORT

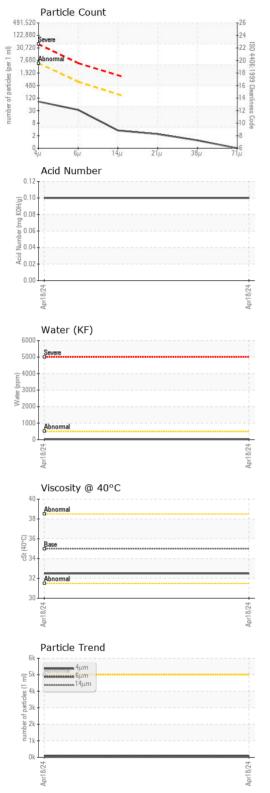

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	72		
Particles >6µm		ASTM D7647	>640	29		
Particles >14µm		ASTM D7647	>160	3		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	13/12/9		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.10		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	35	32.5		
Visc @ 100°C	cSt	ASTM D7279(m)		5.7		
Viscosity Index (VI)	Scale	ASTM D2270*		116		
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image





Laboratory Sample No.

Lab Number : 02630628

: E30001911 Unique Number : 5763760

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 22 Apr 2024 **Tested** : 24 Apr 2024

Diagnosed : 26 Apr 2024 - Tatiana Sorkina Test Package : IND 2 (Additional Tests: KF, KV100, VI)

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

To discuss this sample report, contact Customer Service at 1-905-372-2251.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950 Contact/Location: Tatiana Sorkina - CHECOB