




OIL ANALYSIS REPORT

Sample Rating Trend

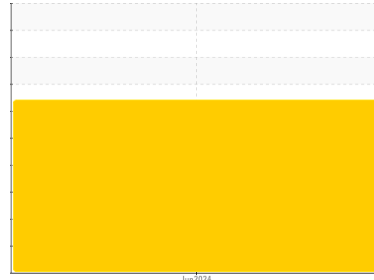

DIRT



Area
Infasco - I02400
 Machine Id
A2406053
 Component
Unknown Component
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

- Wear**
Copper, iron and nickel ppm levels are noted.
- Contamination**
Silicon ppm levels are notably high. Potassium ppm levels are notably high.
- Fluid Condition**
Sodium ppm levels are notably high.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Batch #	Client Info			2024 05 0910	---	---
Department	Client Info			Production	---	---
Sample From	Client Info			Machine	---	---
Production Stage	Client Info			Initial	---	---
Sent to WC	Client Info			06/06/2024	---	---
Sample Number	Client Info			E30002337	---	---
Sample Date	Client Info			06 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			NEG	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		529	---	---
Chromium	ppm	ASTM D5185(m)		8	---	---
Nickel	ppm	ASTM D5185(m)		15	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)		6	---	---
Lead	ppm	ASTM D5185(m)		3	---	---
Copper	ppm	ASTM D5185(m)		139	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		<1	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		9	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		8	---	---
Manganese	ppm	ASTM D5185(m)		9	---	---
Magnesium	ppm	ASTM D5185(m)		20	---	---
Calcium	ppm	ASTM D5185(m)		296	---	---
Phosphorus	ppm	ASTM D5185(m)		404	---	---
Zinc	ppm	ASTM D5185(m)		666	---	---
Sulfur	ppm	ASTM D5185(m)		1607	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		24	---	---
Sodium	ppm	ASTM D5185(m)		51	---	---
Potassium	ppm	ASTM D5185(m)	>20	45	---	---

OIL ANALYSIS REPORT


Glycol Contamination

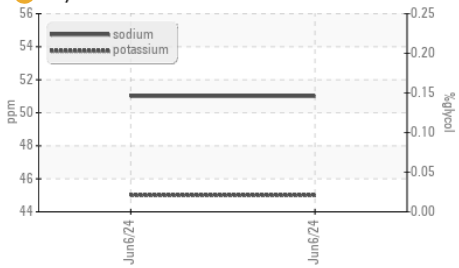


Ferrous Alloys

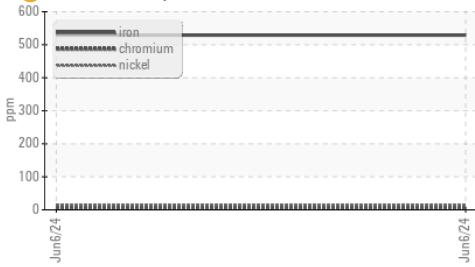

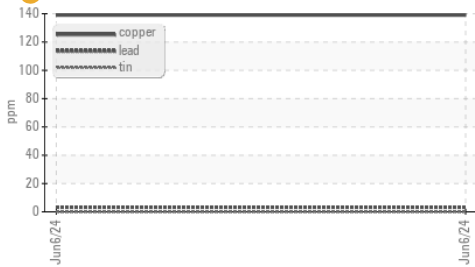

Non-ferrous Metals

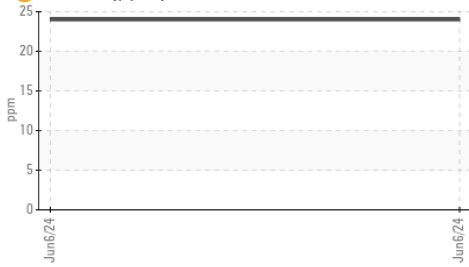

Silicon (ppm)



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	VLITE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : E30002337
Lab Number : 02640943
Unique Number : 5798482
Test Package : TEST (Additional Tests: ICP)

Environmental 360 Solutions Ltd.
 640 Victoria Street
 Cobourg, ON
 CA K9A 5H5
 Contact: Tatiana Sorkina
 tsorkina@e360s.ca
 T: (800)263-3939
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-905-372-2251.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.