




OIL ANALYSIS REPORT



Machine Id
VOLVO L70H 622774
 Component
Diesel Engine
 Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

Sample Rating Trend

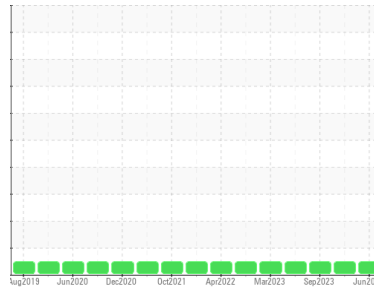

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0940367	WC0896323	WC0849291
Sample Date	Client Info		04 Jun 2024	29 Feb 2024	29 Sep 2023
Machine Age	hrs	Client Info	9954	9504	8956
Oil Age	hrs	Client Info	500	500	500
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>200	6	10	7
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>30	2	4	3
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>20	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2.5	30	31	24
Barium	ppm	ASTM D5185(m)	0.0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0.7	41	43	44
Manganese	ppm	ASTM D5185(m)	0.0	<1	0	0
Magnesium	ppm	ASTM D5185(m)	256	534	541	538
Calcium	ppm	ASTM D5185(m)	2057	1795	1842	1767
Phosphorus	ppm	ASTM D5185(m)	935	954	987	976
Zinc	ppm	ASTM D5185(m)	1223	1121	1155	1158
Sulfur	ppm	ASTM D5185(m)	4079	2421	2628	2487
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	4	6	4
Sodium	ppm	ASTM D5185(m)		3	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.1	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	9.0	9.3	8.5
Sulfation	Abs.1mm	ASTM D7415*	>30	23.4	22.4	22.7



OIL ANALYSIS REPORT







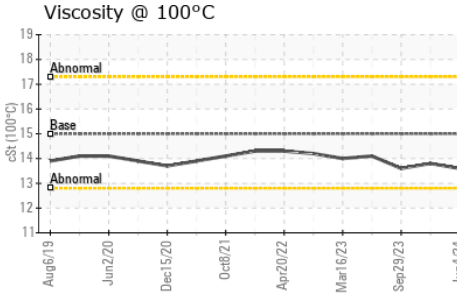
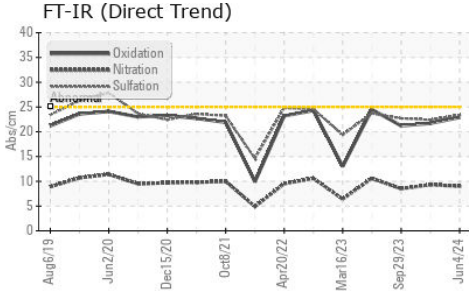


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	22.9	21.7	21.2

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	13.6	13.8	13.6

GRAPHS

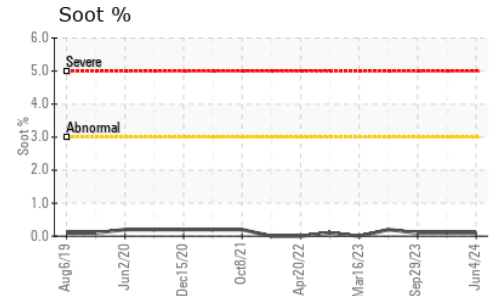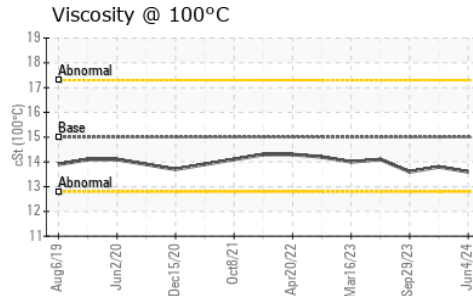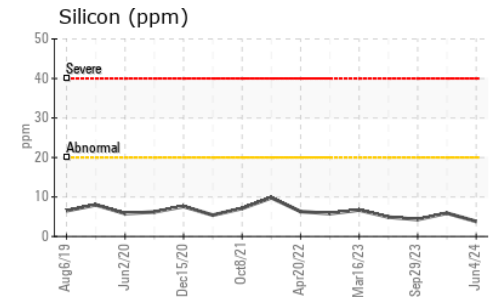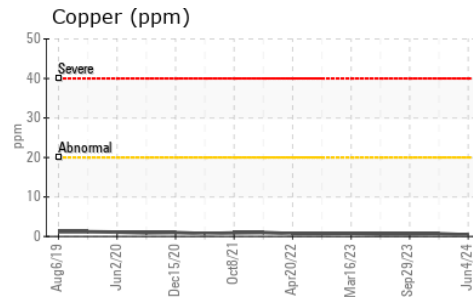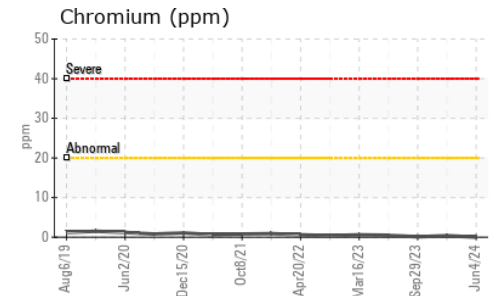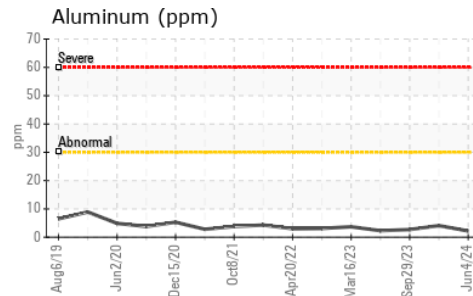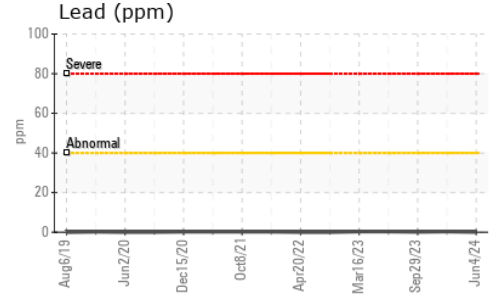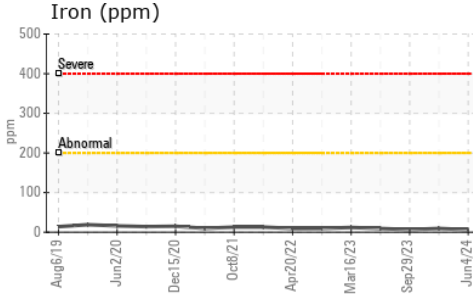

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0940367
Lab Number : **02640978**
Unique Number : 5798517
Test Package : MOB 1

STRONGCO EQUIPMENT
 255 BAIG BOULEVARD
 MONCTON, NB
 CA E1E 1E1
 Contact: Greg Ward
 gward@strongco.com
 T: (506)857-8425
 F: (506)857-0851

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.