




PROBLEM SUMMARY




Sample Rating Trend

ISO

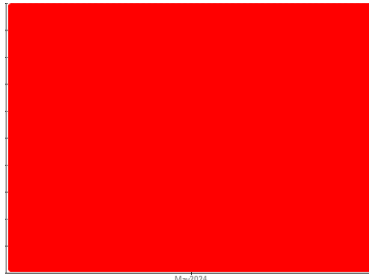

Area
IMT Corporation - I02600
 Machine Id
AM1011
 Component
Quench Oil
 Fluid
 {not provided} (--- GAL)

COMPONENT CONDITION SUMMARY

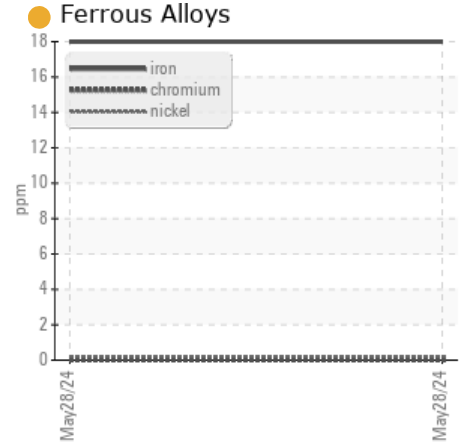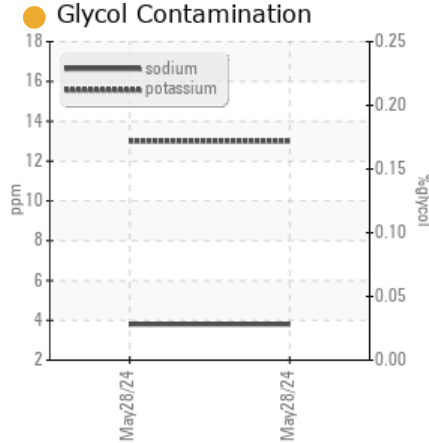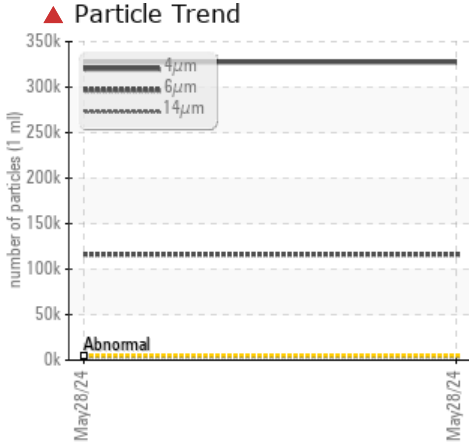

RECOMMENDATION

The sample submitted is 128 times dirtier than the ISO dirt count recommendation of 19/16/14.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	---	---
Particles >4µm	ASTM D7647	>5000	▲ 327551	---	---
Particles >6µm	ASTM D7647	>640	▲ 116202	---	---
Particles >14µm	ASTM D7647	>160	▲ 3752	---	---
Particles >21µm	ASTM D7647	>40	▲ 730	---	---
Particles >38µm	ASTM D7647	>10	▲ 55	---	---
Particles >71µm	ASTM D7647	>3	▲ 7	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16/14	▲ 26/24/19	---	---

Customer Id: CHECOB
 Sample No.: E30002340
 Lab Number: 02641118
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Tatiana Sorkina +1 (800)263-3939
tsorkina@e360s.ca

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.


HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO

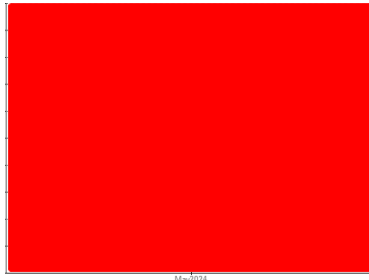

Area
IMT Corporation - I02600
 Machine Id
AM1011
 Component
Quench Oil
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

▲ Recommendation

The sample submitted is 128 times dirtier than the ISO dirt count recommendation of 19/16/14.

● Wear

Iron ppm levels are noted.

▲ Contamination

Particles >14µm are severely high. Particles >21µm are severely high. Particles >6µm are severely high. Oil Cleanliness are severely high. Particles >4µm are severely high. Particles >38µm are abnormally high. Particles >71µm are abnormally high. Potassium ppm levels are notably high.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Machine ID	Client Info		Furnace #1458	---	---
Department	Client Info		Sales	---	---
Sample From	Client Info		Machine	---	---
Production Stage	Client Info		Initial	---	---
Sent to WC	Client Info		06/06/2024	---	---
Sample Number	Client Info		E30002340	---	---
Sample Date	Client Info		28 May 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	● 18	---	---
Chromium	ppm	ASTM D5185(m)	0	---	---
Nickel	ppm	ASTM D5185(m)	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m)	<1	---	---
Lead	ppm	ASTM D5185(m)	0	---	---
Copper	ppm	ASTM D5185(m)	<1	---	---
Tin	ppm	ASTM D5185(m)	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---






ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	3	---	---
Barium	ppm	ASTM D5185(m)	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	---	---
Manganese	ppm	ASTM D5185(m)	1	---	---
Magnesium	ppm	ASTM D5185(m)	<1	---	---
Calcium	ppm	ASTM D5185(m)	16	---	---
Phosphorus	ppm	ASTM D5185(m)	7	---	---
Zinc	ppm	ASTM D5185(m)	6	---	---
Sulfur	ppm	ASTM D5185(m)	328	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	0	---	---
Sodium	ppm	ASTM D5185(m)	4	---	---
Potassium	ppm	ASTM D5185(m) >20	● 13	---	---
Water	%	ASTM D6304*	0.003	---	---
ppm Water	ppm	ASTM D6304*	40	---	---

OIL ANALYSIS REPORT

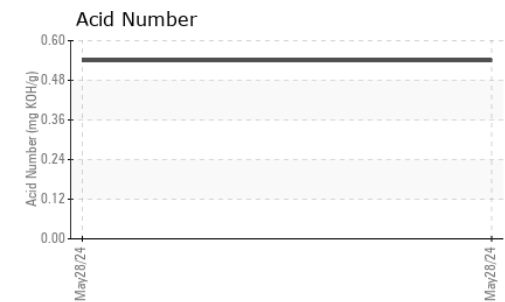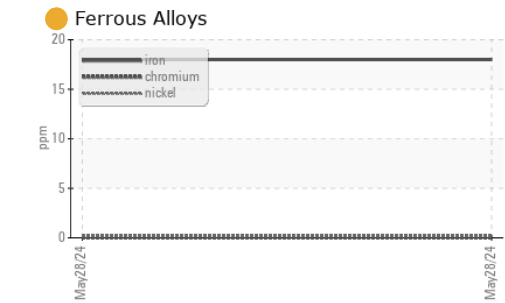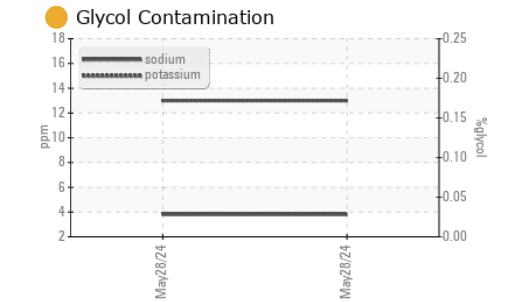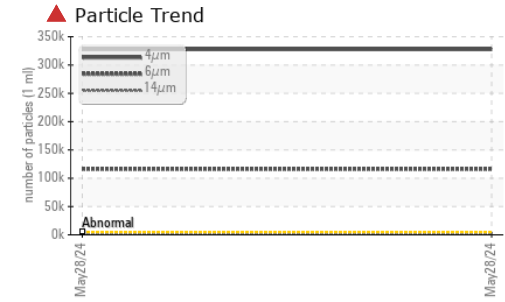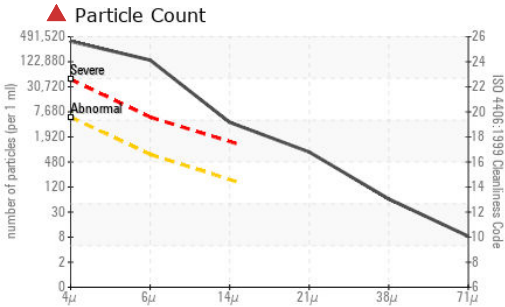

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : E30002340
Lab Number : 02641118
Unique Number : 5798657
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI)

Received : 11 Jun 2024
Tested : 12 Jun 2024
Diagnosed : 13 Jun 2024 - Tatiana Sorkina

To discuss this sample report, contact Customer Service at 1-905-372-2251.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.
 640 Victoria Street
 Cobourg, ON
 CA K9A 5H5
 Contact: Tatiana Sorkina
 tsorkina@e360s.ca
 T: (800)263-3939
 F: (905)373-4950

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 327551	---	---
Particles >6µm	ASTM D7647	>640	▲ 116202	---	---
Particles >14µm	ASTM D7647	>160	▲ 3752	---	---
Particles >21µm	ASTM D7647	>40	▲ 730	---	---
Particles >38µm	ASTM D7647	>10	▲ 55	---	---
Particles >71µm	ASTM D7647	>3	▲ 7	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16/14	▲ 26/24/19	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.54	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	NEG	---	---	
Free Water	scalar	Visual*	NEG	---	---	

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	16.8	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	3.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	105	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image