

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area Chem-Ecol A2406060

Unknown Component

{not provided} (--- GAL)

	IOS	


Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

			,	Jun 2024	<u>.</u>			
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2		
Batch #		Client Info		3113-A				
Department		Client Info		Production				
Sample From		Client Info		Machine				
Production Stage		Client Info		Final				
Sent to WC		Client Info		06/07/2024				
Sample Number		Client Info		E30002352				
Sample Date		Client Info		07 Jun 2024				
Machine Age	hrs	Client Info		0				
Oil Age	hrs	Client Info		0				
Oil Changed		Client Info		N/A				
Sample Status				NORMAL				
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)		<1				
Chromium	ppm	ASTM D5185(m)		0				
Nickel	ppm	ASTM D5185(m)		0				
Titanium	ppm	ASTM D5185(m)		0				
Silver	ppm	ASTM D5185(m)		0				
Aluminum	ppm	ASTM D5185(m)		0				
Lead	ppm	ASTM D5185(m)		0				
Copper	ppm	ASTM D5185(m)		<1				
Tin	ppm	ASTM D5185(m)		<1				
Antimony	ppm	ASTM D5185(m)		0				
Vanadium	ppm	ASTM D5185(m)		0				
Beryllium	ppm	ASTM D5185(m)		0				
Cadmium	ppm	ASTM D5185(m)		0				
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)		0				
Barium	ppm	ASTM D5185(m)		0				
Molybdenum	ppm	ASTM D5185(m)		0				
Manganese	ppm	ASTM D5185(m)		0				
Magnesium	ppm	ASTM D5185(m)		0				
Calcium	ppm	ASTM D5185(m)		<1				
Phosphorus	ppm	ASTM D5185(m)		3				
Zinc	ppm	ASTM D5185(m)		2				
Sulfur	ppm	ASTM D5185(m)		588				
Lithium	ppm	ASTM D5185(m)		<1				
CONTAMINANTS	;	method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)		0				
Sodium	ppm	ASTM D5185(m)		0				
Potassium	ppm	ASTM D5185(m)	>20	<1				
Water	%	ASTM D6304*		0.002				
ppm Water	ppm	ASTM D6304*		21				



OIL ANALYSIS REPORT

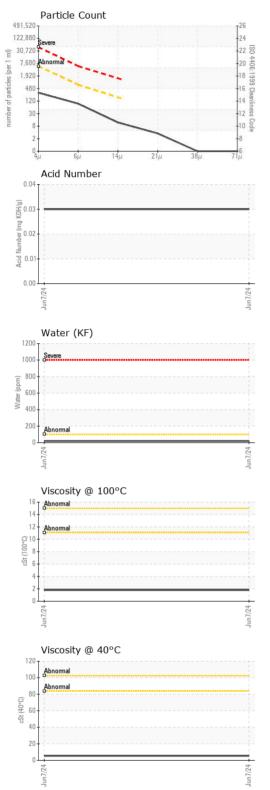

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	267		
Particles >6µm		ASTM D7647	>640	80		
Particles >14μm		ASTM D7647	>160	10		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	0		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	15/13/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.03		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		5.4		
Visc @ 100°C	cSt	ASTM D7279(m)		1.8		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color				E300	no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No. Lab Number : 02641119 Unique Number : 5798658

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : E30002352 : 11 Jun 2024

Received **Tested** Diagnosed

: 13 Jun 2024 - Tatiana Sorkina Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

: 12 Jun 2024

To discuss this sample report, contact Customer Service at 1-905-372-2251. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950