


# **OIL ANALYSIS REPORT**

# City of Windsor Transfer Station - 888092 **RB015**

Component Unknown Component

MOBIL DTE 10 EXCEL 46 (--- GAL)

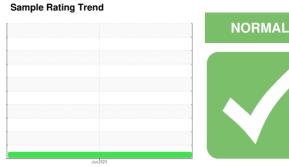



### Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

### Wear

Copper ppm levels are noted.

			,	Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Machine ID		Client Info		South Compactor		
Department		Client Info		Sales		
Sample From		Client Info		Machine		
Production Stage		Client Info		Initial		
Sent to WC		Client Info		06/07/2024		
Sample Number		Client Info		E30002348		
Sample Date		Client Info		04 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)		1		
Chromium	ppm	ASTM D5185(m)		<1		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		<1		
Copper	ppm	ASTM D5185(m)		40		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		75		
Phosphorus 	ppm	ASTM D5185(m)		406		
Zinc	ppm	ASTM D5185(m)		106		
Sulfur	ppm	ASTM D5185(m)		1149		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.009		
144 .		LOTLI DAGG ::				

ppm Water


ASTM D6304\*

ppm

97



## **OIL ANALYSIS REPORT**

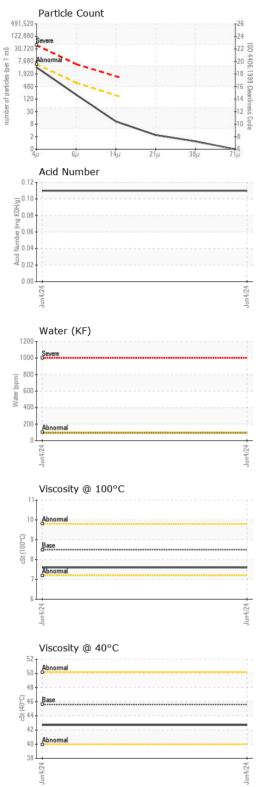

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3581		
Particles >6µm		ASTM D7647	>640	173		
Particles >14μm		ASTM D7647	>160	9		
Particles >21μm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	1		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	19/15/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.11		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERTI	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	45.6	42.7		
Visc @ 100°C	cSt	ASTM D7279(m)	8.5	7.6		
Viscosity Index (VI)	Scale	ASTM D2270*	164	147		
SAMPLE IMAGES	,	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No. Lab Number : 02641138 Unique Number : 5798677

: E30002348

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 11 Jun 2024

**Tested** : 12 Jun 2024 Diagnosed : 13 Jun 2024 - Tatiana Sorkina

Test Package : IND 2 ( Additional Tests: KF, KV100, PrtCount, VI ) To discuss this sample report, contact Customer Service at 1-905-372-2251. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950