




# OIL ANALYSIS REPORT



Machine Id  
**CATERPILLAR AD30 TRK227 (S/N 100016191)**  
 Component  
**Rear Right Planetary**  
 Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

Sample Rating Trend

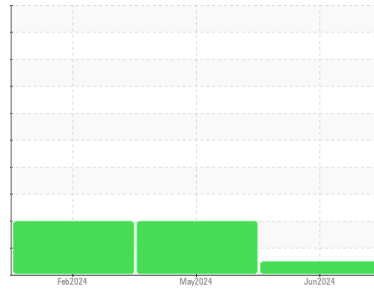

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0951791</b>	WC0937676	WC0908501
Sample Date	Client Info		<b>08 Jun 2024</b>	08 May 2024	18 Feb 2024
Machine Age	hrs	Client Info	<b>3202</b>	2809	1691
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>500	<b>2</b>	319	267
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	3	2
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	2	2
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>1</b>	4	4
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	1	2
Copper	ppm	ASTM D5185(m)	>75	<b>0</b>	61	61
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	2	2
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	<b>1</b>	80	87
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	5	5
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	4	3
Magnesium	ppm	ASTM D5185(m)	9	<b>10</b>	4	3
Calcium	ppm	ASTM D5185(m)	3114	<b>3511</b>	753	446
Phosphorus	ppm	ASTM D5185(m)	1099	<b>859</b>	380	339
Zinc	ppm	ASTM D5185(m)	1245	<b>1036</b>	147	62
Sulfur	ppm	ASTM D5185(m)	7086	<b>10329</b>	9998	10721
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>75	<b>13</b>	27	27
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	7	8
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	2




# OIL ANALYSIS REPORT

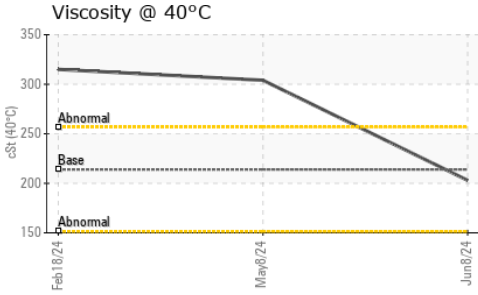


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	VLITE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	VLITE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	213.9	<b>203</b>	▲ 304 ▲ 315

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

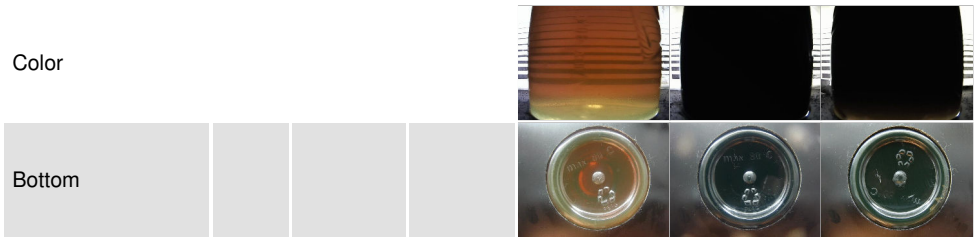

## GRAPHS

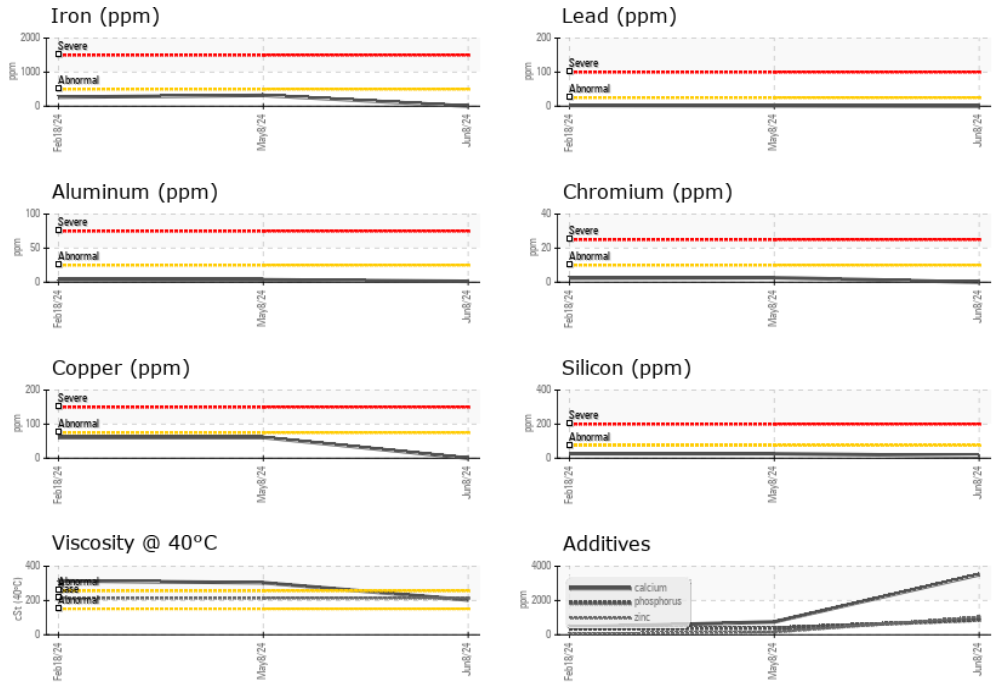

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0951791  
**Lab Number** : **02641255**  
**Unique Number** : 5798794  
**Test Package** : MOB 1

**Agnico Eagle Canada**  
 1350 Government Rd. W, MACASSA COMPLEX  
 Kirkland Lake, ON  
 CA P2N 3J1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Mitch Lamontagne  
 AEM\_KL\_macassaoilsampleresults@agnicoeagle.com  
 T: (705)567-5208  
 F: (705)567-5221