




# OIL ANALYSIS REPORT

Sample Rating Trend

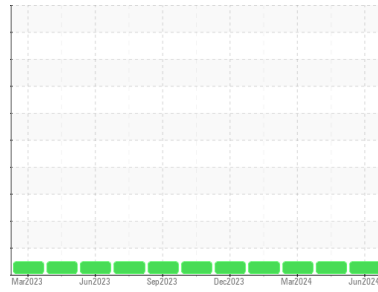

**NORMAL**



Machine Id

**2204**

Component

**Natural Gas Engine**

Fluid

**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0937137</b>	WC0917650	WC0877983
Sample Date	Client Info			<b>07 Jun 2024</b>	11 Apr 2024	05 Mar 2024
Machine Age	kms	Client Info		<b>94186</b>	82051	74633
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>50	<b>12</b>	6	7
Chromium	ppm	ASTM D5185(m)	>4	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>1</b>	1	1
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185(m)	>35	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>8</b>	19	21
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>59</b>	53	52
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185(m)		<b>884</b>	817	776
Calcium	ppm	ASTM D5185(m)		<b>1340</b>	1225	1186
Phosphorus	ppm	ASTM D5185(m)		<b>674</b>	686	681
Zinc	ppm	ASTM D5185(m)		<b>907</b>	845	824
Sulfur	ppm	ASTM D5185(m)		<b>1960</b>	1933	2011
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>+100	<b>4</b>	2	3
Sodium	ppm	ASTM D5185(m)		<b>5</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>13.3</b>	10.3	10.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.2</b>	20.9	22.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>22.5</b>	18.0	18.8











# OIL ANALYSIS REPORT

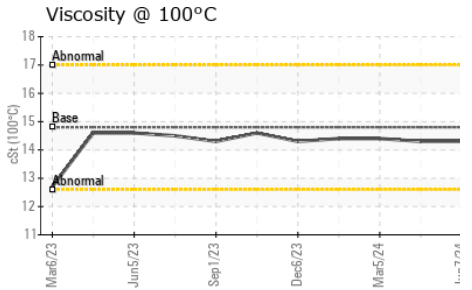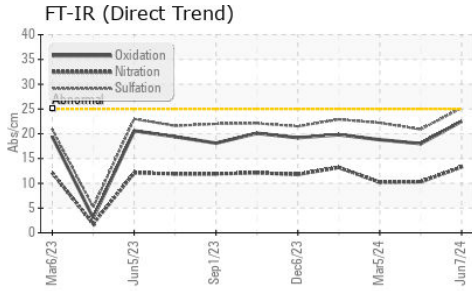

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.3	14.4

## GRAPHS

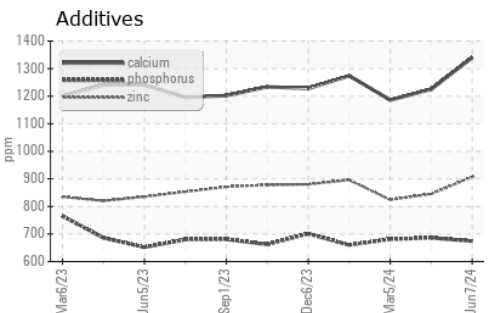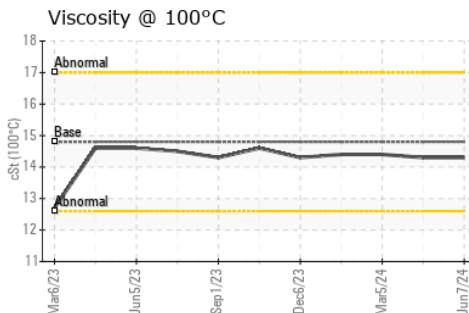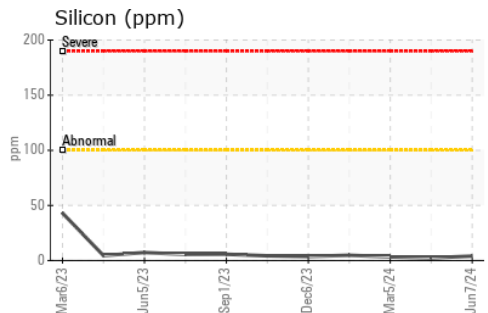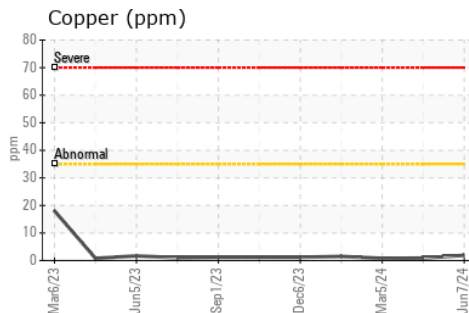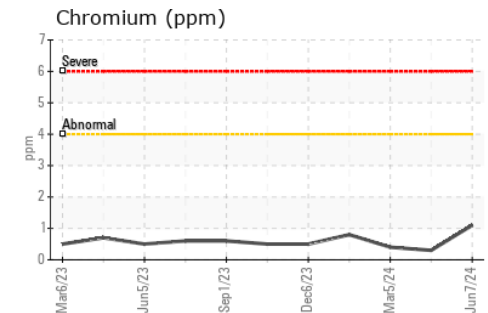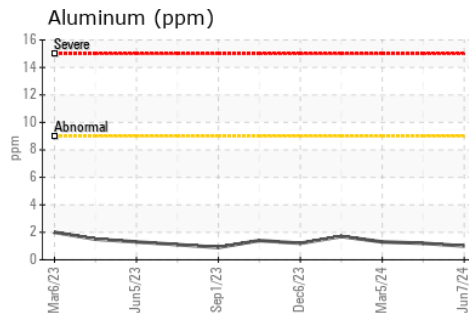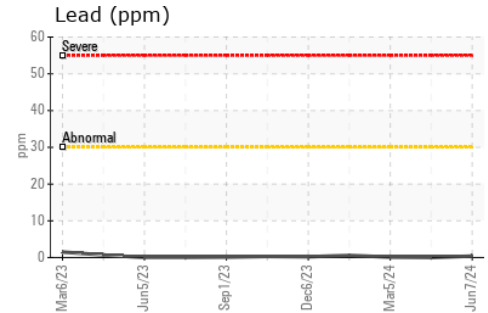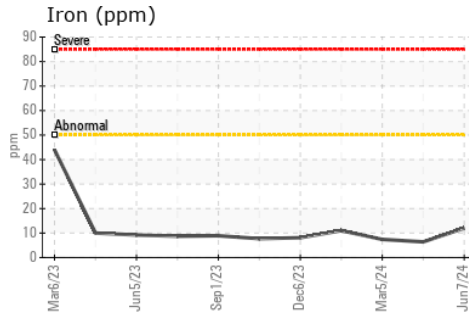

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0937137  
**Lab Number** : 02641331  
**Unique Number** : 5798870  
**Test Package** : MOB 1  
**Received** : 12 Jun 2024  
**Tested** : 12 Jun 2024  
**Diagnosed** : 12 Jun 2024 - Wes Davis

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Cliff Bird  
 cliff.bird@hamilton.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: (905)679-4502