



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Area
Vicinity Energy - 888095
 Machine Id
FK421
 Component
Unknown Component
 Fluid
CHEVRON DELO 710 LE (--- GAL)

DIAGNOSIS

Recommendation

Virgin oil analysis for reference purposes only






SAMPLE INFORMATION		method	limit/base	current	history1	history2
Machine ID	Client Info			Bulk Tank	---	---
Department	Client Info			Sales	---	---
Sample From	Client Info			Machine	---	---
Production Stage	Client Info			Virgin	---	---
Sent to WC	Client Info			06/10/2024	---	---
Sample Number	Client Info			E30002358	---	---
Sample Date	Client Info			06 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		<1	---	---
Chromium	ppm	ASTM D5185(m)		0	---	---
Nickel	ppm	ASTM D5185(m)		0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)		<1	---	---
Lead	ppm	ASTM D5185(m)		0	---	---
Copper	ppm	ASTM D5185(m)		0	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		53	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		44	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		21	---	---
Calcium	ppm	ASTM D5185(m)		3158	---	---
Phosphorus	ppm	ASTM D5185(m)		32	---	---
Zinc	ppm	ASTM D5185(m)	10	34	---	---
Sulfur	ppm	ASTM D5185(m)		1768	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		5	---	---
Sodium	ppm	ASTM D5185(m)		2	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water	%	ASTM D6304*		0.026	---	---
ppm Water	ppm	ASTM D6304*		263	---	---

OIL ANALYSIS REPORT

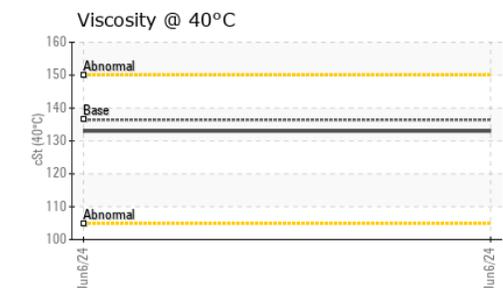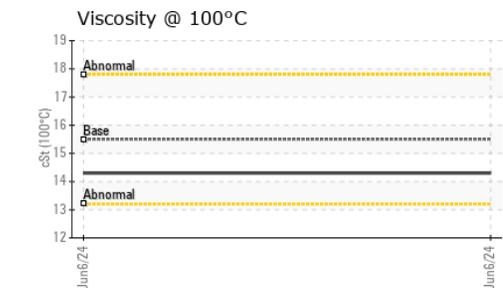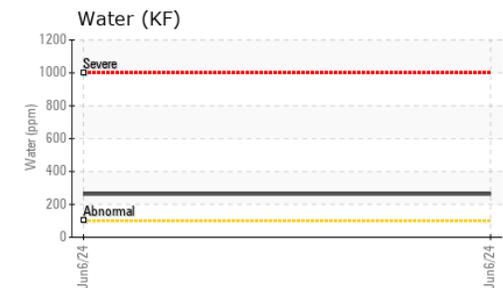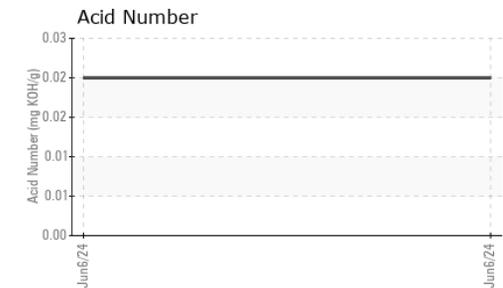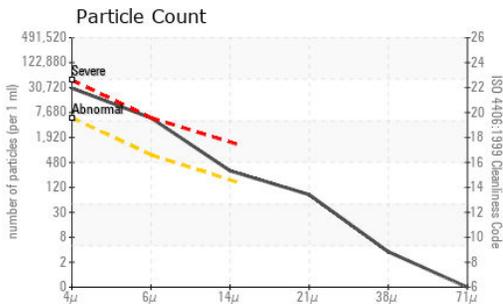

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	25774	---	---
Particles >6µm	ASTM D7647	>640	4957	---	---
Particles >14µm	ASTM D7647	>160	265	---	---
Particles >21µm	ASTM D7647	>40	71	---	---
Particles >38µm	ASTM D7647	>10	3	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16/14	22/19/15	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.02	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	NEG	---	---
Free Water	scalar	Visual*	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	136.4	133	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	14.3	---
Viscosity Index (VI)	Scale	ASTM D2270*	117	106	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : E30002358
Lab Number : **02641403**
Unique Number : 5798942
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

Environmental 360 Solutions Ltd.
 640 Victoria Street
 Cobourg, ON
 CA K9A 5H5
 Contact: Tatiana Sorkina
 tsorkina@e360s.ca
 T: (800)263-3939
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-905-372-2251.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.