




PROBLEM SUMMARY


Area
[172522]
 Machine Id
TUMBLER #3
 Component
Hydraulic System
 Fluid
PETRO CANADA PURITY FG AW HYDRAULIC 32 (8 LTR)

Sample Rating Trend

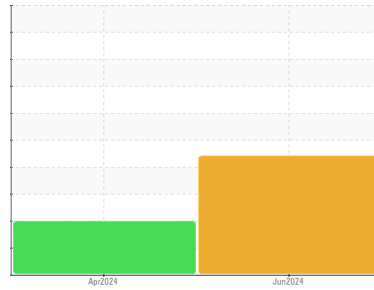

COMPONENT CONDITION SUMMARY

▲ Particle Trend

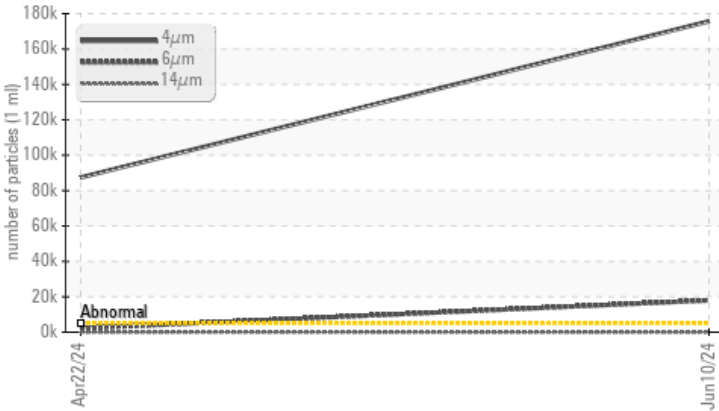

RECOMMENDATION

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. Please specify the component make and model with your next sample.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	SEVERE	---
Particles >4µm	ASTM D7647	>5000	▲ 175719	▲ 87434	---
Particles >6µm	ASTM D7647	>1300	▲ 17959	● 2128	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 25/21/11	▲ 24/18/12	---
Appearance	scalar Visual*	NORML	▲ HAZY	NORML	---

Customer Id: GRA685CAM
 Sample No.: WC0898876
 Lab Number: 02641417
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Information Required	---	---	?	Please specify the component make and model with your next sample.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.

HISTORICAL DIAGNOSIS

ISO



22 Apr 2024 Diag: Kevin Marson

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. Please specify the component make and model with your next sample. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

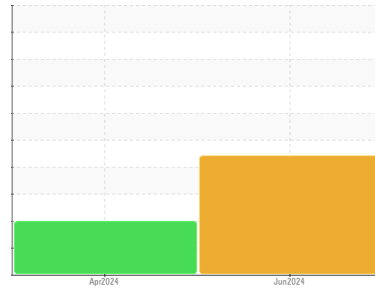

ISO



Area
[172522]
 Machine Id
TUMBLER #3
 Component
Hydraulic System
 Fluid
PETRO CANADA PURITY FG AW HYDRAULIC 32 (8 LTR)

DIAGNOSIS

▲ Recommendation

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0898876	WC0929918	---
Sample Date	Client Info		10 Jun 2024	22 Apr 2024	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			SEVERE	SEVERE	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	0	---
Iron	ppm	ASTM D5185(m) >20	24	20	---
Chromium	ppm	ASTM D5185(m) >10	0	0	---
Nickel	ppm	ASTM D5185(m) >10	0	0	---
Titanium	ppm	ASTM D5185(m)	0	0	---
Silver	ppm	ASTM D5185(m)	0	0	---
Aluminum	ppm	ASTM D5185(m) >10	<1	0	---
Lead	ppm	ASTM D5185(m) >10	0	0	---
Copper	ppm	ASTM D5185(m) >75	<1	<1	---
Tin	ppm	ASTM D5185(m) >10	0	0	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<1	<1	---
Barium	ppm	ASTM D5185(m)	0	0	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---
Manganese	ppm	ASTM D5185(m)	<1	<1	---
Magnesium	ppm	ASTM D5185(m)	<1	0	---
Calcium	ppm	ASTM D5185(m)	<1	<1	---
Phosphorus	ppm	ASTM D5185(m)	370	374	---
Zinc	ppm	ASTM D5185(m)	3	4	---
Sulfur	ppm	ASTM D5185(m)	344	338	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	2	2	---
Sodium	ppm	ASTM D5185(m)	8	1	---
Potassium	ppm	ASTM D5185(m) >20	<1	1	---
Water	%	ASTM D6304* >0.1	0.016	---	---
ppm Water	ppm	ASTM D6304* >1000	164	---	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 175719	▲ 87434	---
Particles >6µm	ASTM D7647	>1300	▲ 17959	● 2128	---
Particles >14µm	ASTM D7647	>160	16	31	---
Particles >21µm	ASTM D7647	>40	3	8	---
Particles >38µm	ASTM D7647	>10	0	1	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 25/21/11	▲ 24/18/12	---



OIL ANALYSIS REPORT

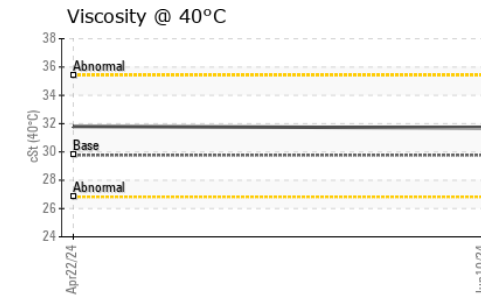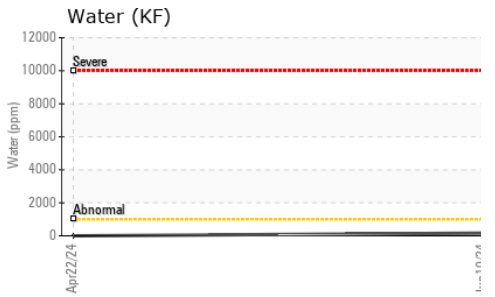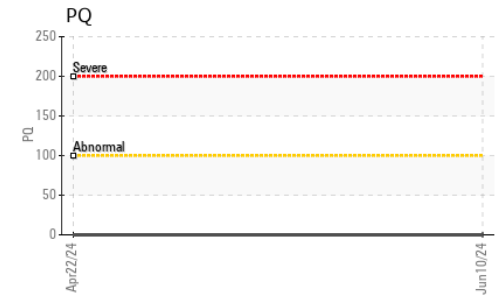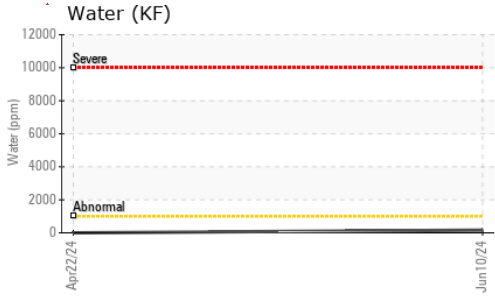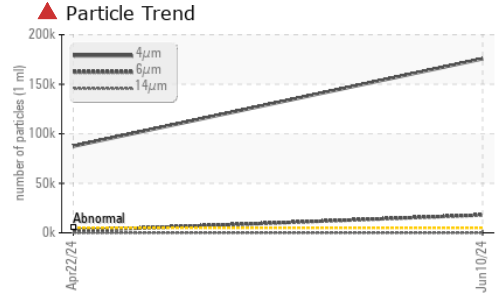


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.26	0.19	0.19	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	HAZY	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	29.77	31.7	31.8	---

SAMPLE IMAGES

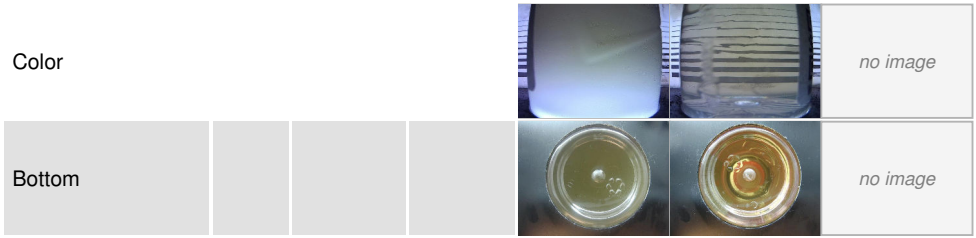

GRAPHS

Ferrous Alloys

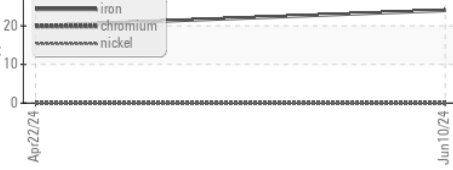


Non-ferrous Metals



Viscosity @ 40°C



Particle Count

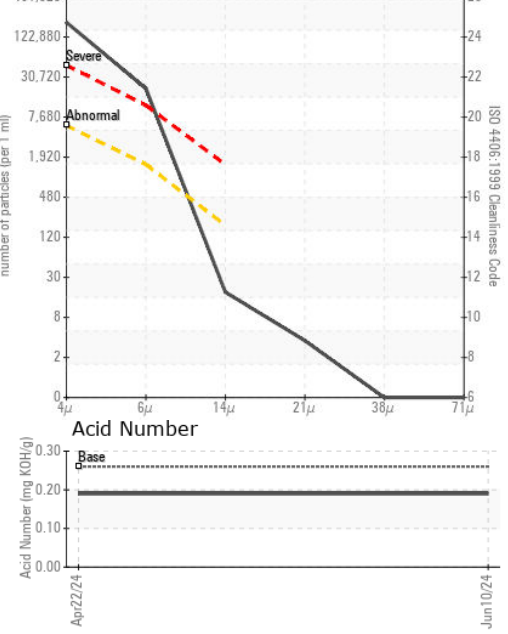

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0898876 **Received** : 12 Jun 2024
Lab Number : **02641417** **Tested** : 17 Jun 2024
Unique Number : 5798956 **Diagnosed** : 17 Jun 2024 - Kevin Marson
Test Package : IND 2 (Additional Tests: KF, PQ)

GRAND RIVER FOODS
 190 VONDRAU DRIVE
 CAMBRIDGE, ON
 CA N3E 1B8
 Contact: Ryan Shea
 rshea@grandriverfoods.com
 T: (519)653-3577
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.